

SCRR SERIES Commercial Lighting

SCRR-18D-MCTP5-D

REGRESSED ARCHITECTURAL PANEL LIGHT W/ 10FT SUS. CABLE

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

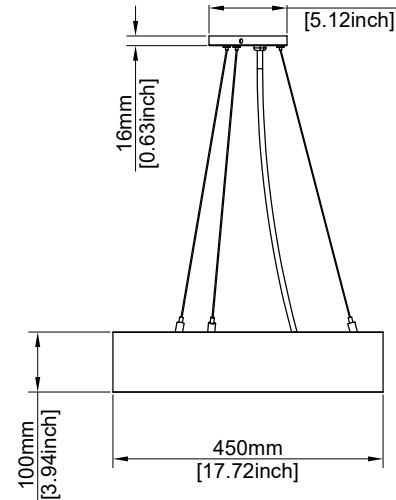

Canopy Dimension: 5.12"(L) x 0.63"(H)

Fixture Dimension: 17.72"(L) x 3.94"(H)

A modern decorative Euro-design suspended light suitable for conference tables, creative offices and department stores.

Features

- LED Superior Architectural Lights
- Aluminum Housing With Sandy White Finish
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- 5-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 15W/20W/25W/30W/35W
- Power Factor: >0.98
- LPW: 130 LM/W
- Total Harmonic Distortion: ≤19 %

Mechanical:

- Aluminum Housing With Sandy White Finish
- Regressed lens design helps reduce visible glare and creates a cleaner, more comfortable lighting appearance
- Three 10FT Adjustable Suspension Cables
- Opal Polycarbonate Lens - Direct Down Light,
- Operating Temperature: -46°F to 104°F
- IP Rating: IP20
- 5-Year Warranty

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 4550LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- Color Rendering Index: CRI ≥ 80
- 50,000 Hours Rated Life
- Beam Angle: 114°(H) x 114°(V)

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-04102022

Photometrics: SCRR-18D-MCTP5-D



BUD Rating: B2-U3-G1

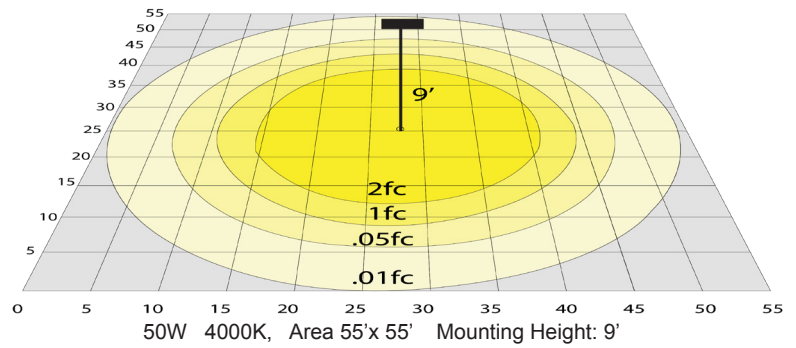

Performance Table: SCRR-18D-MCTP5-

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCRR-18D-MCTP5-D	15W 20W 25W 30W 35W	120~277V	1950 2600 3250 3900 4550	2700K 3000K 3500K 4000K 5000K	B2-U3-G1	130

Sample Ordering

Model	Size	Color Temp.	Dimming
SCRR	18D	MCTP5	D

Accessories:

Blank = No Option For Accessories

SCRR-1618D-ULK= Uplight Kit For 16in & 18in SCRR Fixtures

SCRR-1824D-RODKIT = Rod Kit For 18in & 24in SCRR Fixtures

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-SCR = EMERGENCY BACKUP INTERNAL BATTERY

OPT-SEN-2MDR-36 = SENSOR

ACCESSORY:



SCRR-1618D-ULK



SCRR-1824D-RODKIT

FACTORY-INSTALLED OPTIONS:



OPT-SEN-2MDR-36



OPT-EM-SCR

