

SCSL SERIES

SCSL-UD-AP-4FT-MCTP

SCSL-UD-AP-4FT-MCTP-BK

ARCHITECTURAL SLIM UP&DOWN LINEAR LIGHT

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE



THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

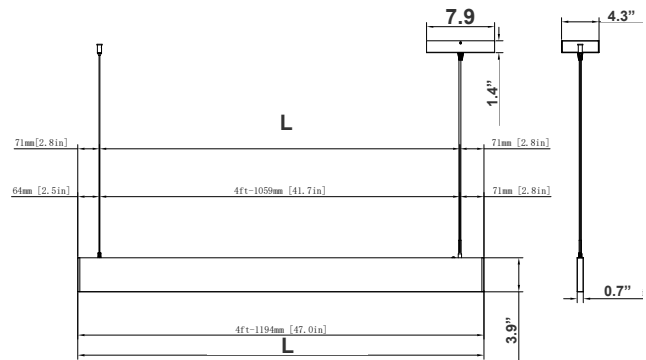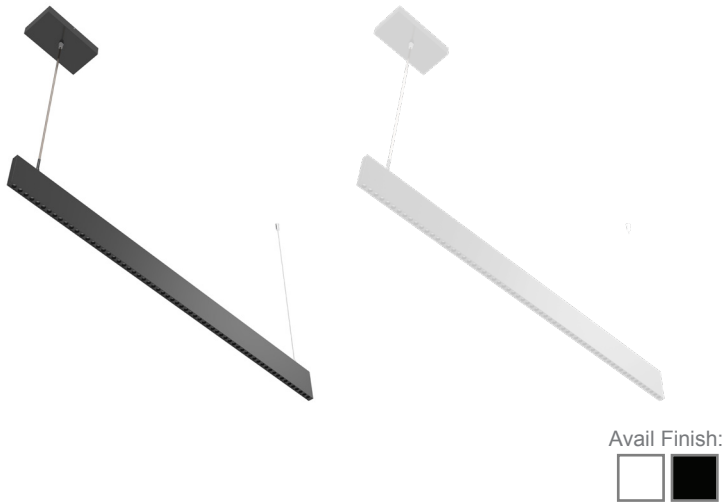

Canopy Dimension: 7.9"(W) x 1.4"(H) x 4.3"(D)

Fixture Dimension: 47"(W) x 3.9"(H) x 0.7"(D)

A modern decorative Euro-design suspended light suitable for conference tables, creative offices and department stores.

Features

- LED Superior Architectural Lights
- Aperture Optics for AP models
- Aluminum Housing With Sandy Black Finish
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- 5-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 20W/23W/26W/29W
- Power Factor: >0.95
- LPW: 90LM/W
- Total Harmonic Distortion: ≤19 %

Mechanical:

- Aluminum Housing With Sandy Black and White Finish
- Two 10FT Adjustable Suspension Cables with Canopies Included
- Lens: Aperture Optics
- Operating Temperature: -22°F to +104°F
- IP Rating: IP20, Suitable for damp location
- 5-Year Warranty

Lighting:

- Dimming: (Dual Function) Triac Dimmable at 120V & 1-10V Dimming at 120-277V
- Total Lumens: 2610LM Max.
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- Color Rendering Index: CRI ≥ 80
- 50,000 Hours Rated Life
- Beam Angle: 36°

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-04102022

Photometrics: SCSL-UD-AP-4FT-MCTP

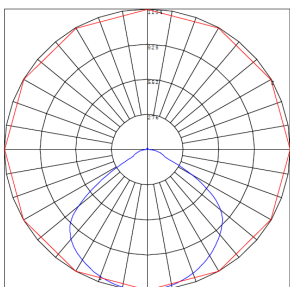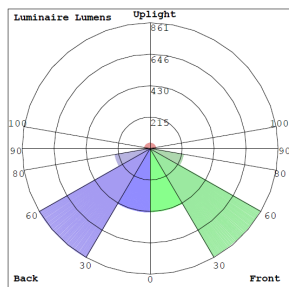


BUD Rating: B1-U2-G1

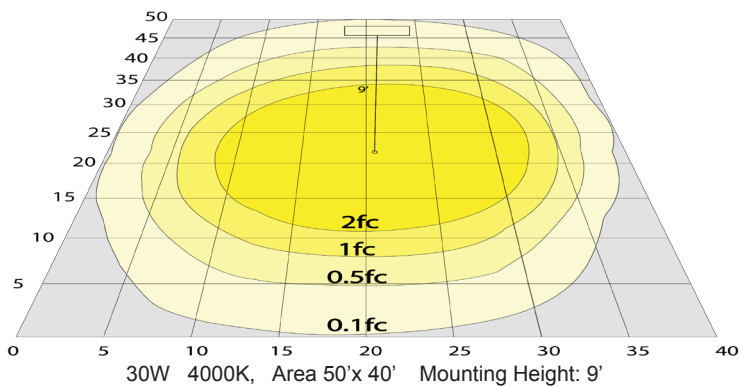


Other Views:

Black:

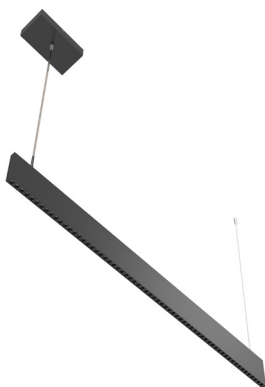


Side View

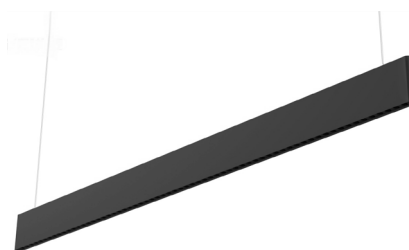


Lens View

White:

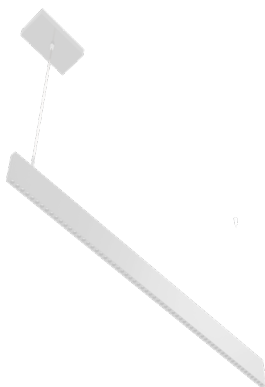

Side View

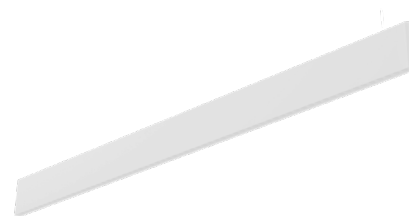

Lens View

Performance Table: SCSL-UD-AP-4FT-MCTP

MODEL NO.	Wa age	Voltage	Lumens	Color Temp.	BUG Ratin	LPW
SCSL-UD-AP-4FT-MCTP-WH SCSL-UD-AP-4FT-MCTP-BK	20W 23W 26W 29W	120~277V	1800 2070 2340 2910	2700K 3000K 3500K 4000K 5000K	B1-U2-G1	90



Sample Ordering


Model	Direction	Lens	Size	Color Temp.	Finish					
SCSL	-	UD	-	UD	-	4FT	-	MCTP	-	

WH = Blank
BK = Blac


Accessories:

Blank = No Option For Accessories
SCSL-REC = SCSL Rounded End Cap
SCSL-REC-BK = SCSL Rounded End Cap. Black
SCSL-CEC = SCSL Coupling End Cap
SCSL-CEC-BK = SCSL Coupling End Cap

ACCESSORIES:



SCSL-CEC



SCSL-CEC-BK

