

SCSL-WM SERIES

SCSL-WM-UD-AP-12-MCT
SCSL-WM-UD-AP-12-MCT-BK

ARCHITECTURAL 0.7" SLIM UP&DOWN /W SEPARATE CONTROLS
WALL SCONCE


MCT Multi Color Temperature (Selectable)

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

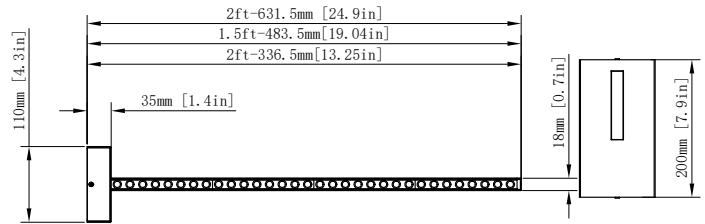

Architectural wall sconce featuring a 0.7 in. (18mm) slim linear design, delivering balanced up and down lighting with independently controlled outputs for flexible lighting design.

13.25"(W) x 7.9"(H) x 4.3"(D)

Features

- LED Superior Architectural Lights
- Black or White Finish
- MCT: Multi Color Temperature (Selectable)
- 36° Aperture Optics

Technical Specifications

Electrical:

- Voltage: 120V AC 50/60Hz
- Wattage: 7W
- Power Factor: >0.95
- LPW: 90LM/W
- Total Harmonic Distortion: ≤19 %

Mechanical:

- Independent up/down control switch
- Aluminum Housing with Sandy Black/White Finish
- Operating Temperature: -40°F to +212°F
- IP Rating: IP20, Suitable for damp location
- 5-Year Warranty

Lighting:

- MCT: Multi Color Temperature (Selectable)
- Dimming: Triac Dimming
- Total Lumens: 630LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 36°
- 50,000 Hours Rated Life

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications



Other Views:

Black:



Side View



Lens View

White:



Side View



Lens View

Performance Table: SCSL-WM-UD-AP-12-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	LPW
SCSL-WM-UD-AP-12-MCT-WH SCSL-WM-UD-AP-12-MCT-BK	7W	120V	630	2700K 3000K 3500K 4000K 5000K	90

Sample Ordering

Model	Style	Direction	Aperture	Size	Color Temp.	Finish						
SCSL	-	WM	-	UD	-	AP	-	12	-	MCT	-	<input type="text"/>

BK = Black
WH = White

Accessories:

Blank = No Option For Accessories
SCSL-REC = SCSL Rounded End Cap
SCSL-REC-BK = SCSL Rounded End Cap. Black

