SCX SERIES


Commercial Lighting


WESTGATE
THE FUTURE IS HERE. AND IT'S QUITE BRIGHT!

SCX-3FT-30W-MCT4-D-IND



Linear Lighting can customize your desired length, look, and color temperature to be suspended, Ideal for Storage rooms, OfficesConference rooms, Retail.





35 3/4"(L) x 2 6/8"(W) x 3 3/8"(H)

Features

- LED Superior Architectural Lights
- Opal Polycarbonate Lens-Direct (UP) Lighting
- 5-Year Warranty

- Lens Type: Opal Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable with Switch Inside Fixture)

Technical Specifications

Electrical:

Voltage: 120-277VAC 50/60Hz

Wattage: 30WPower Factor: >0.95

Total Harmonic Distortion: ≤ 20 %

Mechanical:

- Low Profile Modern Design
- Aluminum Housing With Matte White Finish
- Lens Type: Opal Polycarbonate Lens
- Lens Snaps into Housing
- IP Rating: IP54
- Operating Temperature: -13°F~104°F
- Suspended, Requires Suspension Cables (Not Included)
 See Page 2
- Power Cord comes out through the Suspension Hole on the End of the Fixture from the Top
- 5-Year Warranty

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 3329M/ 3362LM/ 3523LM/ 3551LM
- Color Temperatures: 3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 80
- Up Light Option Available
- 50,000 Hours Rated Life
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications

Other Models:

 $\bullet \ 20W \ | \ 2390LM \ | \ SCX-2FT-20W-MCT4-D-IND \\ \bullet \ 40W \ | \ 4710LM \ | \ SCX-4FT-40W-MCT4-D-IND \\ \bullet \ 60W \ | \ 7102LM \ | \ SCX-6FT-60W-MCT4-D-IND \\ \bullet \ 60W \ | \ 7102LM \ | \ SCX-6FT-60W-MCT4-D-IND \\ \bullet \ 60W \ | \ 7102LM \ | \ SCX-6FT-60W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ SCX-8FT-80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ SCX-8FT-80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ SCX-8FT-80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ SCX-8FT-80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ SCX-8FT-80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W \ | \ 9420LM \ | \ 80W-MCT4-D-IND \\ \bullet \ 80W-MCT4-$















Photometrics: SCX-3FT-MCT4-D-IND



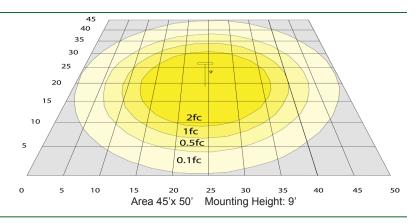

Other Views:



Side View

Performance Table: SCX-3FT-MCT4-D-IND

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCX-3FT-30W-MCT4-D-IND	30W	120~277V	3329LM 3362LM 3523LM 3551LM	3000K 3500K 4000K 5000K	B2-U2-G1	111 112 117 118

Sample Ordering

Front View

Model	Size	Wattage Color Temp. Feature	Lens
SCX -	3FT	– 30W – MCT4 – D –	IND

Accessories:

Blank = No Option For Accessories

SCL-CS = FOR UP TO 6FT FIXTURES Adjustable 6ft 1/16" Aircraft Cable Suspension Kit with Canopy for Ceiling or T-Bar

SCL-CS3 = FOR 8FT FIXTURES Adjustable 6ft 1/16" Aircraft Cable Suspension Kit with Canopy for Ceiling or T-Bar

SCL-6FT-SJTW18/5 = 6ft White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT = 100ft Roll of White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT-BK = 100ft Roll of Black Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/6-100FT = 100ft Roll of Black Cord, SJTW 18 AWG 6-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming + Red for Backup Invertor)

SCL-AH = Heavy-Duty Auxiliary Hook for Up To 1/16" Aircraft Cable

SCL-ASC-500FT = 1/16" 500 ft. Steel Aircraft Cable Suspension

SCL-GS10 = Adjustable 1/16" 10ft suspension kit with loop gripper & toggle ends hold up to 70 lbs load SCL-GS20 = Adjustable 1/16" 20ft suspension kit with loop gripper & toggle ends hold up to 70 lbs load OPT-FWH-63/65/66 = This is a 6FT 3/5/6-Wire Whip option

* More Mounting Options Refer to page 3

Factory-Installed Options:

Blank = No Option For Accessories

OPT-HBC-125BS-WH = 10FT, 15A, 125V, 18/3 STR, WHT

* More Factory-Installed Options Refer to page 3

Example:

1. SCX-3FT-30W-MCT4-D-IND

2. SCX-3FT-30W-MCT4-D-IND OPT-HBC-125BS-WH

SUSPENDED MOUNTING ACCESSORIES (NOT INCLUDED):

Back View



SCL-6FT-SJTW18/5

FACTORY-INSTALLED OPTIONS:

SCL-ASC-500FT



OPT-HBC-125BS-WH

(For SCX 30W MCT4 fixture 120-277V)

(For SCX 30W MCT4 fixture 120-277V) (10FT, 15A, 125V, 18/3 STR, WHT)







SCL-ASC-500FT

MOUNTING OPTIONS:







Color of Your Choice

WALL MOUNTING

Model	DESCRIPTION	
OPT-SCX-WM-3FT	Install this optional wall mounting brackets on the back of the fixture. Connection cables will enter the fixture through one of these wall-mounting brackets. On your purchase order, please specify the position of where your wire entry from the wall.	

FACTORY-INSTALLED OPTIONS:

COLOR OF YOUR CHOICE

Model	DESCRIPTION
OPT-SCX-CLR-8FT	Add this option and specify your desired color on your purchase order or provide a swatch to match. For painted flanged fixture or optional rod, mounting set please also add the relevant option below for each fixture.

EMERGENCY BATTERY BACKUP

Model	DESCRIPTION	
OPT-EM-CM1INT	This is an option for a 90-minute backup battery installation. If you need to order this series for the fixture, please have your purchase order ready and	
	call us or specify on the order which fixture to install this option and the test button.	

