

# SCX4 SERIES Commercial Lighting

SCX4-IP66-SUR-8FT-80-160W-MCTP  
POWER & CCT- ADJUSTABLE LINEAR LIGHT, Surface Mounted  
**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)



**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ | Type: \_\_\_\_\_

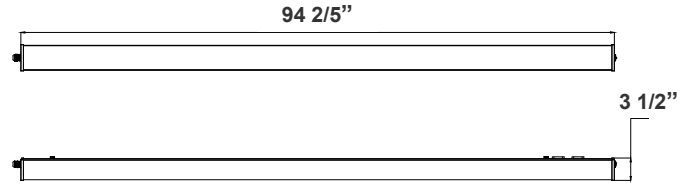

4 1/5" (D) x 94 2/5" (W) x 3 1/2" (H)

The SCX series offers the best and the most comprehensive selection for linear lighting. The unique and modern look providing a impressive illumination for the occupants. Ideal for, retail locations, offices, lobbies, conference rooms, reception areas, hallways, educational facilities, hotels, and restaurants. FEATURES: Superior Architectural Look Energy-efficient: Low Wattage Consumption & High Lumen Output Easier Wire Management, Multi Color Temperature (Selectable Switch on the Fixture)

## Features

- LED Superior Architectural Lights
- Opal Polycarbonate Lens-Direct (DOWN) Lighting
- Lens Type: Opal Polycarbonate Lens
- MCTP: Multi Color Temperature and Power (Selectable Switch On Fixture)

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 80W/120W/160W
- Power Factor: >0.95
- LPW: 110
- Total Harmonic Distortion: ≤ 19 %

### Mechanical:

- 6FT. Lead 18/5 AWG SJTW on One Side
- 1FT. Lead 18/5 AWG SJTW on The Other Side For Daisy Chaining. The Cord Can be Tucked in If Not Needed, Weatherproof 1/2" NPT Plug Provided to Cover The Hub.
- All Wires Are Capped
- Two Steel Compression Connectors Provided.
- Surface Mounting Brackets with Screws & Anchors Included
- Low Profile Modern Design
- Aluminum Housing With Sandy White Finish
- Mounting Options: Surface
- IP Rating: IP66 Wet Location Only
- Operating Temperature: -22°F to +104°F
- 5-Year Warranty

### Lighting:

- MCTP: Multi Color Temperature and Power (Select-able Switch On Fixture)
- Dimmable: 0~10V Dimming
- Total Lumens: 17600LM Max.
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- 50,000 Hours Rated Life
- Beam Angle: 105°(H) x 103.7°(V)

### Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |




WG-01172023

**Photometrics:** SCX4-IP66-SUR-4FT-40-80W-MCTP

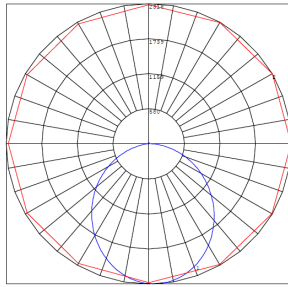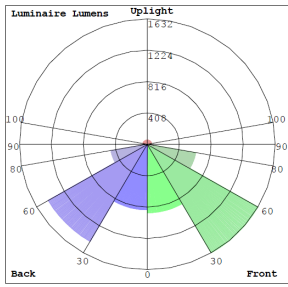

BUD Rating: B2-U3-G1

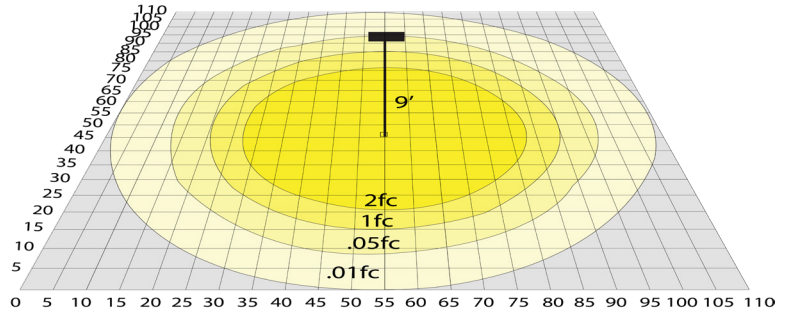


80W, 4000K Area 55'x 110' Mounting Height: 9'

**Other Views:**



Side View

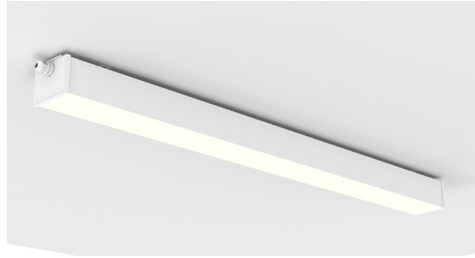

Bottom View




Back View



Steel Connectors



1FT. Lead + Cap



6FT. Lead

**Performance Table:** SCX4-IP66-SUR-8FT-80-160W-MCTP


MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCX4-IP66-SUR-8FT-80-160W-MCTP	80W 120W 160W	120~277V	8800LM 13200LM 17600LM	3500K 4000K 5000K	B2-U3-G1	110

**Sample Ordering**


**Model IP Rating Type Size Wattage Color Temp**

SCX4 - IP66 - SUR - 8FT - 80 - 160W - MCTP

**Other Model:** SCX4-IP66-SUS-8FT-40-80W-MCTP

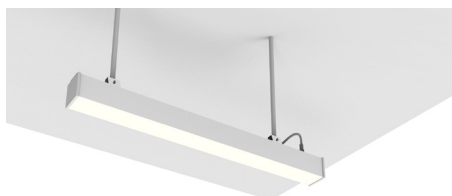

Side View

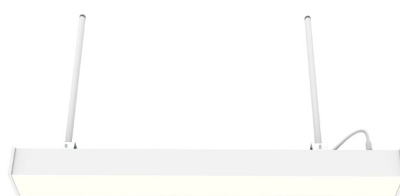

Front View



Back View

