SCX4 SERIES Commercial Lighting

SCX4-IP66-SUS-4FT-10-20W-MCTP-50LPF-BK

POWER & CCT- ADJUSTABLE LINEAR LIGHT, Suspended

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name:

Project Name:

Note: | Type:



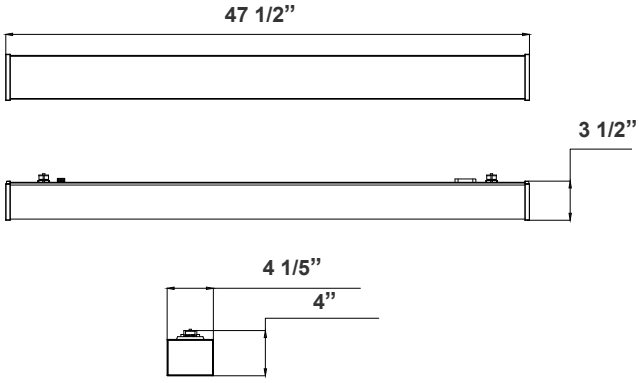

4 1/5”(D) x 47 1/2”(W) x 3 1/2”(H)

The SCX series offers the best and the most comprehensive selection for linear lighting. The unique and modern look providing a impressive illumination for the occupants. Ideal for, retail locations, offices, lobbies, conference rooms, reception areas, hallways, educational facilities, hotels, and restaurants. FEATURES: Superior Architectural Look Energy-efficient: Low Wattage Consumption& High Lumen Output Easier Wire Management, Multi Color Temperature (Selectable Switch on the Fixture)

Features

- LED Superior Architectural Lights
- Opal Polycarbonate Lens-Direct (DOWN) Lighting
- Lens Type: Opal Polycarbonate Lens

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 10W/15W/20W
- Power Factor: >0.95
- LPW: 100
- Total Harmonic Distortion: ≤ 19 %

Mechanical:

- Power Cord is Not Included. Select From The Following Range:
  - SCX4-IP66-ACPT-6FT = SCX4-IP66 6Ft AC Pigtail With Female Wet Loc. Connector
  - SCX4-IP66-ACPT-10FT = SCX4-IP66 10Ft AC Pigtail With Female Wet Loc. Connector
  - SCX4-IP66-JUMP-6IN = SCX4-IP66 6In Ac Jump Cable With Male And Female Wet Loc. Connector
  - SCX4-IP66-JUMP-12IN = SCX4-IP66 12In Ac Jump Cable With Male And Female Wet Loc. Connector
- Wall Mounting Kit Included
- Suspended With Optional Stainless Steel Down Rod Kits or Heavy-Duty Aircraft Cables
- Waterproof Male & Female Connectors Pre-Installed On The Top Near The Two Ends
- Low Profile Modern Design
- Aluminum Housing With Sandy White Finish
- Mounting Options: Suspended, Wall
- IP Rating: IP66 Wet Location Only
- Operating Temperature: -22°F to +104°F
- 5-Year Warranty

Lighting:

- MCTP: Multi Color Temperature and Power (Select-able Switch Fixture)
- Dimmable: 0~10V Dimming
- Total Lumens: 2000LM Max.
- Color Temperatures: 3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 80
- 50,000 Hours Rated Life
- Beam Angle: 105°(H) x 103.7°(V)


Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions


Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |

WG-01172023

Photometrics: SCX4-IP66-SUS-4FT-10-20W-MCTP-BK

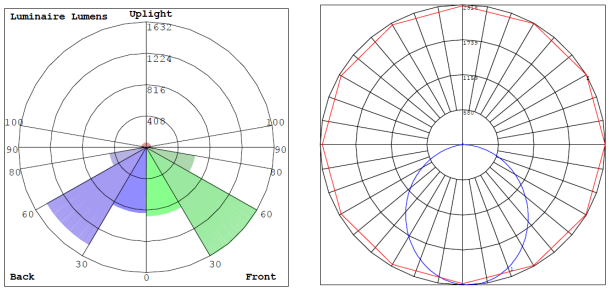


BUD Rating: B2-U3-G1

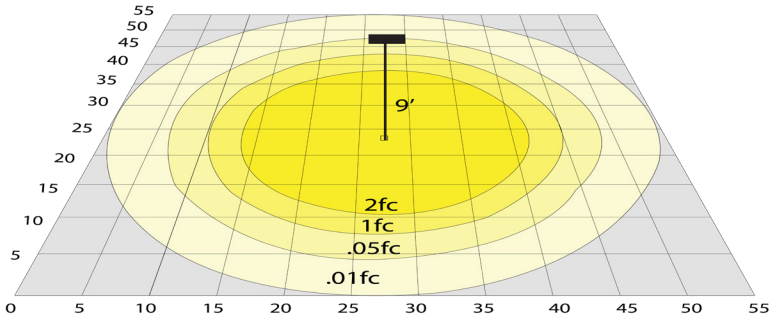


40W, 4000K Area 55'x 55' Mounting Height: 9'

Other Views:

Suspended Mounted (Shown with Rod Kits)




Side View

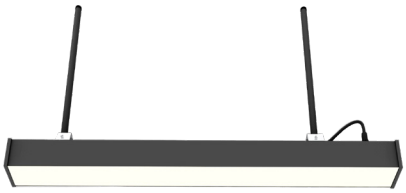

Front View



Back View




Coupling Connection

Wall Mounted



Side View



Front View



Back View

Performance Table: SCX4-IP66-SUS-4FT-10-20W-MCTP-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCX4-IP66-SUS-4FT-10-20W-MCTP-BK	10W 15W 20W	120~277V	1000LM 1500LM 2000LM	3500K 4000K 5000K	B2-U3-G1	100


Sample Ordering

Model	IP Rating	Type	Size	Wattage	Color Temp	Lm/ft	Finish
SCX4	IP66	SUS	4FT	40	80W	MCTP	50LPF	BK

Accessories:

Blank = No Option For Accessories
SCL-GS210 = Heavy-Duty Adjustable 5/64" 10 Ft. Suspension Kit With Loop Gripper & Hook(1)
SCL-GS220 = Heavy-Duty Adjustable 5/64" 20 Ft. Suspension Kit With Loop Gripper & Hook(1)
SCL-6FT-SJTW18/5 = 6ft White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)
SCL-6FT-SJTW18/5-100FT = 100ft Roll of White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)
SCL-6FT-SJTW18/5-100FT-BK = 100ft Roll of Black Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)
SCL-6FT-SJTW18/6-100FT = 100ft Roll of Black Cord, SJTW 18 AWG 6-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming + Red for Backup Invertor)
SCL-AH = Heavy-Duty Auxiliary Hook for Up To 1/16" Aircraft Cable
SCL-ASC-500FT = 1/16" 500 ft. Steel Aircraft Cable Suspension
SCX4-IP66-ACPT-6FT = SCX4-IP66 6Ft Ac Pigtail With Female Wet Loc. Connector
SCX4-IP66-ACPT-10FT = SCX4-IP66 10Ft Ac Pigtail With Female Wet Loc. Connector
SCX4-IP66-JUMP-6IN = SCX4-IP66 6In Ac Jump Cable With Male And Female Wet Loc. Connector
SCX4-IP66-JUMP-12IN = SCX4-IP66 12In Ac Jump Cable With Male And Female Wet Loc. Connector
SCX4-IP66-CB = SCX4-IP66 Coupling Bracket
SCX4-IP66-RODKIT-18IN = SCX4-IP66 18In Suspension Rod Kit
SCX4-IP66-RODKIT-24IN = SCX4-IP66 24In Suspension Rod Kit
SCX4-IP66-SCBK = Suspension Cable Bracket (required with suspension cables)

SUSPENDED MOUNTING ACCESSORIES (NOT INCLUDED)


SCL-GS210 SCL-GS220


SCL-ASC-500FT



SCL-6FT-SJTW18/5-100FT SCL-6FT-SJTW18/5-100FT-BK
SCL-6FT-SJTW18/6-100FT


SCL-AH


SCL-ASC-500FT


SCL-6FT-SJTW18/5



SCX4-IP66-CB


SCX4-IP66-JUMP-6IN
SCX4-IP66-JUMP-12IN


SCX4-IP66-RODKIT-24IN


SCX4-IP66-SCBK


SCX4-IP66-ACPT-6FT
SCX4-IP66-ACPT-10FT


SCX4-IP66-RODKIT-18IN