


# SCX SERIES Commercial Lighting

SCXA-6FT-60W-MCTP-BB  
SCXA-6FT-60W-MCTP-WW

ARCHITECTURAL 2-3/4" OPTIC & COMBINED-DISTRIBUTION  
LINEAR WITH MULTIPLE APERTURE OPTIONS

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)

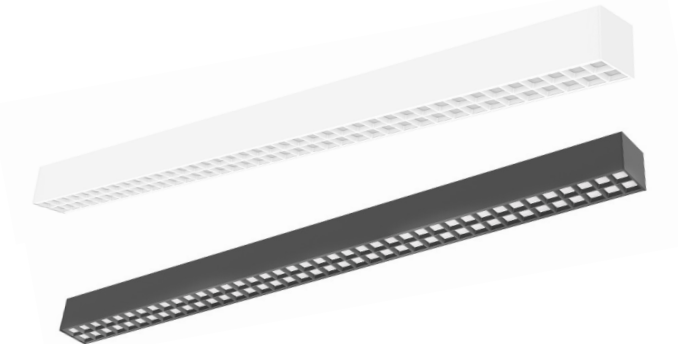

The SCX series offers the best and the most comprehensive selection for linear lighting. The various available lengths and widths allow the creation of the desired shape to elevate the areas aesthetics to a unique and modern look while providing an impressive illumination for the occupants. Ideal for, retail locations, offices, lobbies, conference rooms, reception areas, hallways, educational facilities, hotels, and restaurants. FEATURES: Superior Architectural Look Energy-efficient: Low Wattage Consumption & High Lumen Output Easier Wire Management & Install Variety of Mounting Options Multi Color Temperature (Selectable Switch Inside Fixture) Variety Of Factory Customizations Available

## Features

- LED Superior Architectural Lights
- Seamless Linkable Linear Lighting System
- Opal Polycarbonate Lens-Direct (DOWN) Lighting
- Optional Recessed & Wall Mounting Kits Available
- 50,000 Hours Rated Life
- 5-Year Warranty
- Lens Type: Opal Polycarbonate Lens
- Optional Louver Version Lens Available

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 40W/50W/60W
- Power Factor: >0.95
- Efficacy: 100 LPW

### Mechanical:

- Low Profile Modern Design
- Aluminum Housing With Matte White Finish
- Custom Colors Available
- Lens Snaps into Housing
- Make Different Connections Via T/L/X Joints on Both Ends
- Mounting Options: Surface, Suspended, Wall, Recessed
- IP Rating: IP54
- Operating Temperature: -13°F~104°F

### Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 6000LM Max.
- Color Temperatures: 3000K/3500K/4000K /5000K
- Color Rendering Index: CRI ≥ 80
- Up Light Option Available
- Beam Angle: 104.8°(H) x 100.5°(V)

### Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

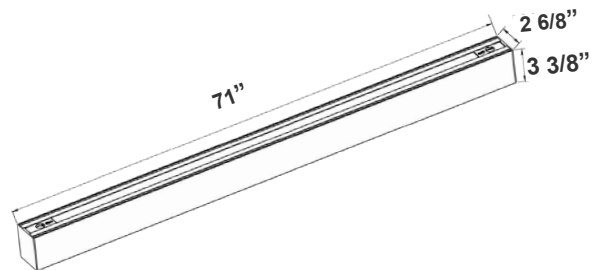

71"(L) x 2 6/8"(W) x 3 3/8"(H)





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-Z5-ZB-22



## Photometrics: SCX-6FT



BUD Rating: B1-U2-G1

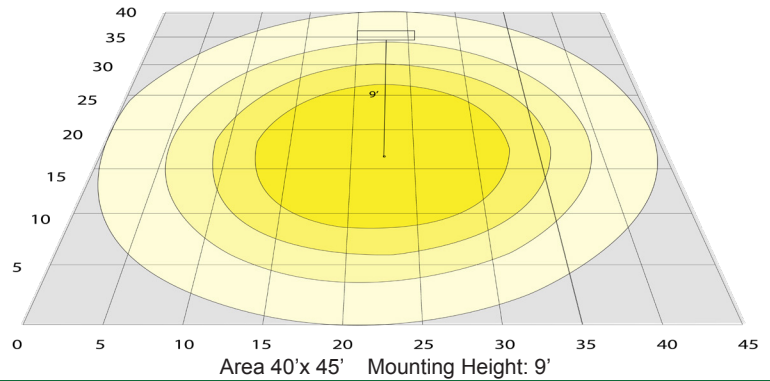

## Other Views:

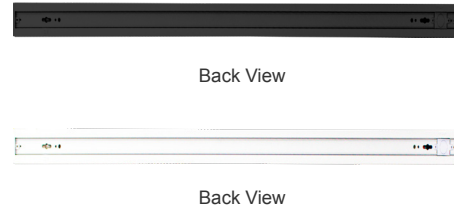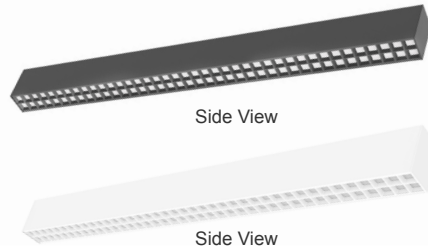

## Performance Table: SCXA-6FT-60W-MCTP

| MODEL NO.            | Wattage | Voltage  | Lumens | Color Temp. | BUG Rating | LPW |
|----------------------|---------|----------|--------|-------------|------------|-----|
| SCXA-6FT-60W-MCTP-BB | 40W     | 120~277V | 4000LM | 3000K       | B1-U2-G1   | 100 |
| SCXA-6FT-60W-MCTP-WW | 50W     |          | 5000LM | 3500K       |            |     |
|                      | 60W     |          | 6000LM | 4000K       |            |     |

## Sample Ordering

Model Size Wattage Color Temp. Finish

SCXA - 6FT - 60W - MCTP -

## Accessories:

Blank = No Option For Accessories

SCL-CS1-6FT = ADJ. 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CONNECTOR, NON-POWER SIDE

SCL-CS1P-6FT = ADJ. 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CONNECTOR, POWER SIDE WITH SJTW18/5 WHITE CORD

SCL-CS1P-6FT-NC = ADJ. 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CONNECTOR

SCL-GS10 = ADJ. 10FT 1/16in DOUBLE SUSPENSION CABLE WITH SINGLE KEYHOLE CONN., LOOP GRIPPER ON TOP

SCL-GS20 = ADJ. 20FT 1/16in DOUBLE SUSPENSION CABLE WITH SINGLE KEYHOLE CONN., LOOP GRIPPER ON TOP

SCL-6FT-SJTW18/5 = 6ft White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-BK = 6ft Black Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT = 100ft Roll of White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT-BK = 100ft Roll of Black Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/6-100FT = 100ft Roll of Black Cord, SJTW 18 AWG 6-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming + Red for Backup Inverter)

SCL-AH = Heavy-Duty Auxiliary Hook for Up To 1/16" Aircraft Cable

SCL-ASC-500FT = 1/16" 500 ft. Steel Aircraft Cable Suspension

SEXA-BCP-4FT-BK = 4F: (Also 6ft 8ft) Slank Cover-Plate Accessory To Replace Center Pe Lens.

SEXA-BCP-4FT-WH = 4F: (Also 6ft 8ft) Slank Cover-Plate Accessory To Replace Center Pt Lens, White

SCXA-OLS-40D-BK = Replacement Optic Lens 400 6in Long. Black

SCXA-OLS-40D-WH = Replacement Optic Lens 400 6in Long. White

SEX-TRACK-H-BK = SCX Track Light Socket End Extension H-Type, White

SEX-TRACK-H-WH = SCX Track Light Socket and Extension H-Type, White

SAXA-OLS-60D-BK = Replacement Standard Optic Lens 630 6in Long. Black

SCXA-OLS-60D-WH = Replacement Standard Optic Lens 800 6in Long.

SCL-CSK-6FT = ADJ. 6FT 1/16in SUSPENSION CANOPY COMPLETE KIT FOR BOTH SIDES WITH KEYHOLE END CONNECTORS


## Factory-Installed Options:

Blank = No Option For Accessories

OPT-HBC-125BS-WH = 10FT, 15A, 125V, 18/3 STR, WHT

OPT-HBC-125BS-BK = 10FT, 15A, 125V, 18/3 STR, BLACK

## SUSPENDED MOUNTING ACCESSORIES (NOT INCLUDED)



SCL-6FT-SJTW18/5-100FT SCL-6FT-SJTW18/5-100FT-BK SCL-ASC-500FT



SCL-AH SCL-ASC-500FT SCL-6FT-SJTW18/5 SCL-6FT-SJTW18/5-BK



SCL-CSK-6FT

## FACTORY-INSTALLED OPTIONS:



OPT-HBC-125BS-WH

OPT-HBC-125BS-BK




## MOUNTING AND MODULES OPTIONS:



Recessed Mounted  
(Flanged)




Surface Mounted



Wall Mounted




Suspended




T-Bar Installation



Flangless Recessed Mounted  
(Mud-In)



Color of Your Choice




L Module  
(page 7)

SCX-L-MCT4-BK



T Module  
(page 7)

SCX-T-MCT4-BK



X Module  
(page 8)

SCX-X-MCT4-BK




Inside Corner Module  
(page 8)

SCX-IC-MCT4-BK




120° Corner Module  
(page 9)

SCX-C120-MCT4-BK



C60 Module  
(page 9)

SCX-C60-MCT4-BK




Outside Corner  
Module  
(page 7)

SCX-OC-MCT4-BK




Suspension Rod Kit

SCL-RS-12 12"  
SCL-RS-18 18"  
SCL-RS-24 24"  
SCL-RS-36 36"  
SCL-RS-48 48"



Up Light Option

3000K  
3500K  
4000K  
5000K  
Blue  
Green




L Module  
(page 7)

SCX-L-MCT4



T Module  
(page 7)

SCX-T-MCT4



X Module  
(page 8)

SCX-X-MCT4




Inside Corner Module  
(page 8)

SCX-IC-MCT4



120° Corner Module  
(page 9)

SCX-C120-MCT4




C60 Module  
(page 9)

SCX-C60-MCT4



Outside Corner Module  
(page 9)

SCX-OC-MCT4



Suspension Rod Kit

SCL-RS-12 12"  
SCL-RS-18 18"  
SCL-RS-24 24"  
SCL-RS-36 36"  
SCL-RS-48 48"



Up Light Option

3000K  
3500K  
4000K  
5000K  
Blue  
Green



## MOUNTING OPTIONS:


### FLANGLESS RECESSED INSTALLATION IN WOOD CEILING

No additional accessories required.

Make recessed preparations by installing a horizontal plank of wood on top of the wood ceiling at a recessed height of 3 3/8".


Screw and anchor kit provided with each fixture can be used to fasten the top of the fixture to the wood plank through the holes on top of the fixture.

You can also install vertical wood boards on top of the ceiling at the edge of the opening and open the fixture and put screws through the side of the fixture housing to fasten it to the wood boards.

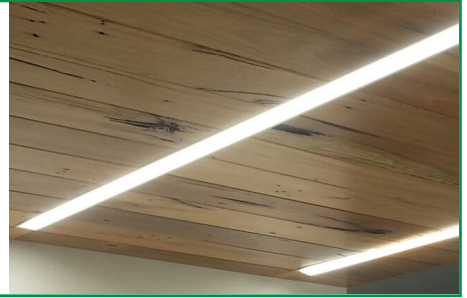


### SUSPENSION ROD KITS (SET OF 2)

| Model     | SIZE  |
|-----------|-------|
| SCL-RS-12 | 12 IN |
| SCL-RS-18 | 18 IN |
| SCL-RS-24 | 24 IN |
| SCL-RS-36 | 36 IN |
| SCL-RS-48 | 48 IN |




### WALL MOUNTING

| Model          | DESCRIPTION                                                                                                                                                                                                                                                |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OPT-SCX-WM-6FT | Install this optional wall mounting brackets on the back of the fixture. Connection cables will enter the fixture through one of these wall-mounting brackets. On your purchase order, please specify the position of where your wire entry from the wall. |

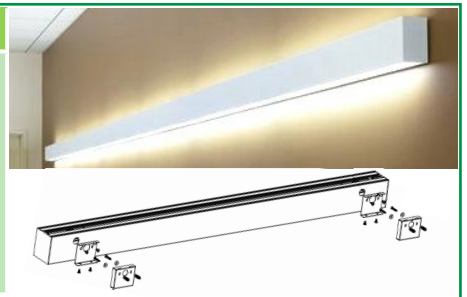


### WALL MOUNTING

| Model           | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                   |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OPT-SCX-WMA-6FT | Add this option to the fixture, and wall mounting arms with a wall canopy will be installed on the back of the fixture. The length of each arm is 5". Connection cables will enter the fixture through one of the arms. On your purchase order, specify the position of your wire entry from the wall, and the arm will be installed on the back accordingly. |

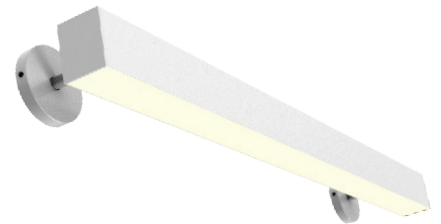

### RECESSED MOUNT WITH FLANGE

| Model           | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OPT-SCX-FMR-6FT | Order this option and the fixture will be equipped with a 1/2" wide flange on four sides. Advanced design toggle-style brackets will also be provided, to adjust and hold the fixture against drywall or other hard ceilings from the top. When linking to another fixture or corner module, call us or send a copy of your plan along with your PO, and flanges will be removed on those ends that need to make a seamless connection. |

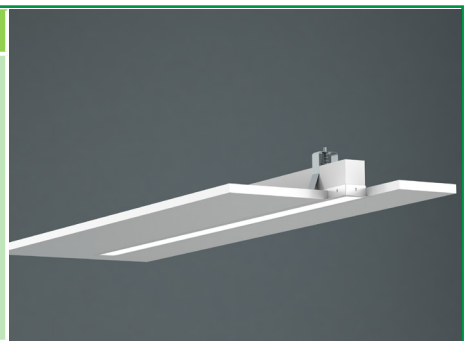



## LINKING

| Model              | DESCRIPTION                                                                                                                                                                                                                          |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OPT-SCX-LINKWIRING | Fixtures are equipped with pre-installed linking brackets and accessories and only need to be wired together. to receive a fixture prewired for linking, order the option below for each link to another fixture or a corner module. |

## FLANGELESS RECESS MOUNT IN DRYWALL (MUD-IN)

| Model           | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| OPT-SCX-MIF-6FT | Order this option and the fixture will be equipped with mud-in brackets on all four sides, mounted at 1/16" from the lens surface (specify if other spacing is needed). Advanced design toggle-style brackets will also be provided, to adjust and hold the fixture against the drywall ceiling from the top. When linking to another fixture or corner fixture module call us or send a copy of your plan along with your PO and flanges will be removed on those end that needs to make a seamless connection. |                                                                                     |
| OPT-SCX-MIF-L   | This is a L Module option.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                     |
| OPT-SCX-MIF-T   | This is a T Module option.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                     |
| OPT-SCX-MIF-X   | This is a X Module option.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                     |
| OPT-SCX-MIF-IC  | This is a Inside Corner Module option.                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |


## T-BAR INSTALLATION

| Model            | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| OPT-SCX-TBAR-6FT | 6FT<br>Add this option to the fixture, and 1/2" wide flanges will be installed on the two long sides of the fixture. The two fixture ends will fall onto the t-bar grids and will be supported this way. The t-bar tiles on the two sides of the fixture must be cut to allow for the fixture's width. The tiles will fall onto and be supported by the flanges on both sides of the fixture. If you plan to support the fixture by the grids on three sides and tile on one side, call us or specify on your po, and the flange will be installed only on one side of the fixture. To provide safety and support from the beams above the t-bar ceiling, order 10ft or 20ft aircraft suspension kits below. |                                                                                      |

## SURFACE MOUNTING


No additional accessories required.

Screw and anchor kit provided with each fixture can be used to fasten the fixture directly to the hard surface through the holes on top of the fixture.

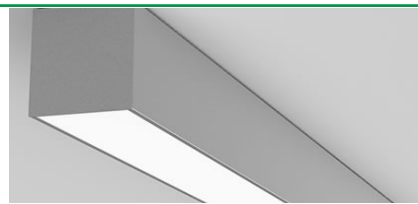


## FACTORY-INSTALLED OPTIONS:

### COLOR OF YOUR CHOICE \* More Color Options Refer to page 9
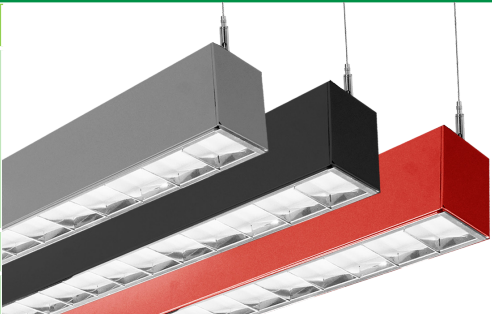
| Model              | DESCRIPTION                                                                                                                                                                                                               |  |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| OPT-SCX-CLR-6FT    | Add this option and specify your desired color on your purchase order or provide a swatch to match. For painted flanged fixture or optional rod, mounting set please also add the relevant option below for each fixture. |                                                                                    |
| OPT-SCX-CLR-FRM    | This is a painted flanges option.                                                                                                                                                                                         |                                                                                    |
| OPT-SCX-CLR-RODSET | This is a painted rod set option.                                                                                                                                                                                         |                                                                                    |


### INDIRECT (UP) LIGHTING
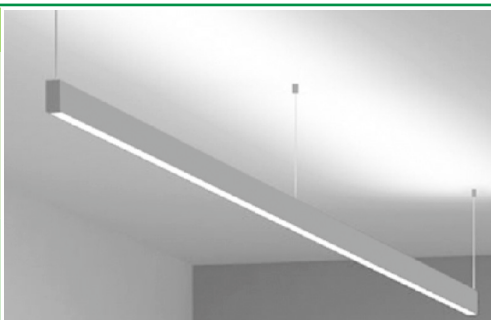
| Model                    | WATTS                                | LUMENS                               | COLOR TEMP                       | SIZE |  |
|--------------------------|--------------------------------------|--------------------------------------|----------------------------------|------|-------------------------------------------------------------------------------------|
| OPT-SCX-ULM-6FT-24W-MCT4 | 24W                                  | 2400LM<br>2472LM<br>2520LM<br>2592LM | 3000K<br>3500K<br>4000K<br>5000K | 6FT  |                                                                                     |
| OPT-SCX-ULM-BU           | Indirect (up) light with blue color  |                                      |                                  |      |                                                                                     |
| OPT-SCX-ULM-GR           | Indirect (up) light with green color |                                      |                                  |      |                                                                                     |
|                          |                                      |                                      |                                  |      |                                                                                     |

### EMERGENCY BATTERY BACKUP

| Model         | DESCRIPTION                                                                                                                                                                                                                                          |  |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| OPT-EM-CM1INT | This is an option for a 90-minute backup battery installation. If you need to order this series for the fixture, please have your purchase order ready and call us or specify on the order which fixture to install this option and the test button. |                                                                                      |


### BI-LEVEL MOTION SENSOR
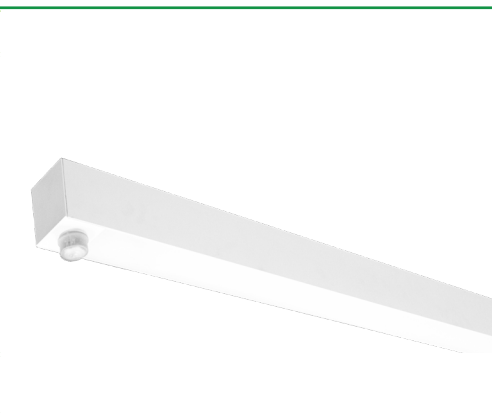
| Model       | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                               |  |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| OPT-SEN-SCX | This option installs an advanced motion sensor that will turn the lights on when the area is occupied. When the area is cleared, after a preset hold time of 5 sec or more the lights are dimmed to a standby level of 30% or more. If still no motion is detected, after the standby period, the light is turned off. All setting is programmable with a remote control. |                                                                                      |
| OPT-WEC-3RC | This is an optional remote control for sensor.                                                                                                                                                                                                                                                                                                                            |                                                                                      |



DEDICATED WIRING FOR UPLIGHT CONTROL

| Model                | DESCRIPTION                                                                                                                                                                                                                                                                                                                                        |        |                                  |      |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------------------------------|------|
| OPT-SCX-ULC-6FT-MCT4 | Dedicated Wiring For Uplight Control By Installing A Separate Electrical Circuit And Compatible Driver For Uplighting. This Ensures Independent Control And Power Management. A Driver Regulates The Voltage And Current Supplied To The Uplights, Allowing For Precise Brightness And Color Control, Often Through A Dimmer Or automation System. |        |                                  |      |
|                      | WATTS                                                                                                                                                                                                                                                                                                                                              | LUMENS | COLOR TEMP                       | SIZE |
|                      | 24W                                                                                                                                                                                                                                                                                                                                                | 2400LM | 3000K<br>3500K<br>4000K<br>5000K | 6FT  |
|                      |                                                                                                                                                                                                                                                                                                                                                    | 2472LM |                                  |      |
|                      |                                                                                                                                                                                                                                                                                                                                                    | 2520LM |                                  |      |
|                      |                                                                                                                                                                                                                                                                                                                                                    | 2592LM |                                  |      |

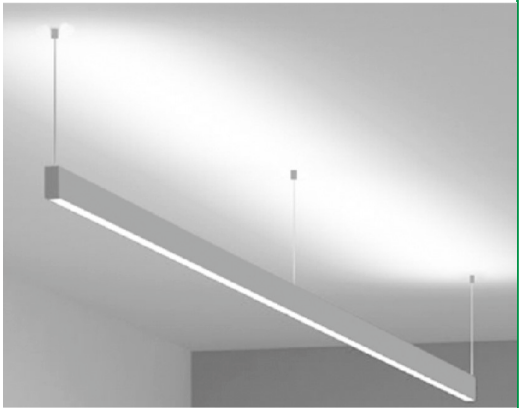

WOOD TRIMS

| Model                   | DESCRIPTION           |
|-------------------------|-----------------------|
| OPT-SCX-WK01-6FT-MAPLE  | 6FT MAPLE FINISH      |
| OPT-SCX-WK01-6FT-WALNUT | 6FT WALNUT FINISH     |
| OPT-SCX-WK01-6FT-FREOAK | 6FT FRENCH OAK FINISH |
| OPT-SCX-WK01-6FT-EBONY  | 6FT EBONY FINISH      |



MAPLE

WALNUT



FRENCH OAK

EBONY




## CORNER FIXTURE MODULES:



### Built-in LED Modules



| Model      | JOINT TYPE | LUMENS                           | MCT4                             | DIMENSION                     |
|------------|------------|----------------------------------|----------------------------------|-------------------------------|
| SCX-L-MCT4 | L          | 508LM<br>575LM<br>616LM<br>660LM | 3000K<br>3500K<br>4000K<br>5000K | 5.75" X 5.75" X 3.35" X 2.75" |




| Model      | JOINT TYPE | LUMENS                           | COLOR TEMP                       | DIMENSION                       |
|------------|------------|----------------------------------|----------------------------------|---------------------------------|
| SCX-T-MCT4 | T          | 629LM<br>726LM<br>787LM<br>854LM | 3000K<br>3500K<br>4000K<br>5000K | 8.75" X 3" X 3" X 3.35" X 2.75" |




| Model      | JOINT TYPE | LUMENS                            | COLOR TEMP                       | DIMENSION               |
|------------|------------|-----------------------------------|----------------------------------|-------------------------|
| SCX-X-MCT4 | X          | 733LM<br>863LM<br>944LM<br>1037LM | 3000K<br>3500K<br>4000K<br>5000K | 3" X 3" X 3.35" X 2.75" |







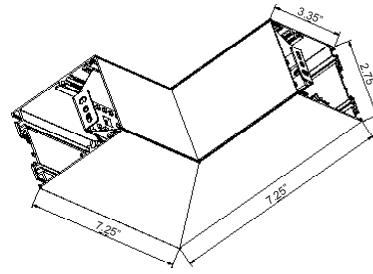

| Model       | JOINT TYPE    | LUMENS                           | COLOR TEMP                       | DIMENSION                     |
|-------------|---------------|----------------------------------|----------------------------------|-------------------------------|
| SCX-IC-MCT4 | INSIDE CORNER | 629LM<br>726LM<br>787LM<br>854LM | 3000K<br>3500K<br>4000K<br>5000K | 7.25" X 7.25" X 3.35" X 2.75" |



| Model         | JOINT TYPE  | LUMENS                           | COLOR TEMP                       | DIMENSION               |
|---------------|-------------|----------------------------------|----------------------------------|-------------------------|
| SCX-C120-MCT4 | 120° CORNER | 508LM<br>575LM<br>616LM<br>660LM | 3000K<br>3500K<br>4000K<br>5000K | 6" X 6" X 3.35" X 2.75" |



| Model       | JOINT TYPE     | LUMENS                           | COLOR TEMP                       | DIMENSION                     |
|-------------|----------------|----------------------------------|----------------------------------|-------------------------------|
| SCX-OC-MCT4 | OUTSIDE CORNER | 629LM<br>726LM<br>787LM<br>854LM | 3000K<br>3500K<br>4000K<br>5000K | 6.22" X 6.22" X 3.35" X 2.75" |



## COLOR CHART: \* Choose from one of our Premium Colors with no set-up fee.

### Gloss:



SILVER METALLIC  
70 GLOSS  
T357-GR105



SILVER METALLIC  
30 GLOSS  
T353-GR06



DARK RED 90  
GLOSS  
P009-RD02



INTERNATIONAL  
ORANGE 90  
GLOSS  
T009-OG26



SAFETY ORANGE  
90 GLOSS  
T009-OG01



YELLOW 90  
GLOSS  
T009-YL14



YELLOW 90  
GLOSS  
T009-YL01



TRAFFIC GREEN  
70 GLOSS  
T007-GN16



GREEN 70 GLOSS  
T007-GN13



GREEN 60 GLOSS  
C006-GN03



BLUE 90 GLOSS  
T009-BL01



DARK BLUE 80  
GLOSS  
T008-BL20



RAL 8028 TERRA  
BROWN 90 GLOSS  
C209-BR358

### Hammer:




WHITE HAMMER  
T013-WH09



BEIGE HAMMER  
T013-BG38



GREY HAMMER  
C013-GR08



SILVER  
HAMMERTONE  
T064-GR05




BLACK HAMMER  
T013-BK62



RED HAMMER  
T013-RD15



GREEN HAMMER  
T013-GN220



BLUE HAMMER  
T013-BL468



BRONZE HAMMER  
T012-BR161

### Texture:



WHITE TEXTURE  
C031-WH120



FLINT GRAY  
TEXTURE  
T243-GR522




BLACK TEXTURE  
C241-BK109



RED TEXTURE  
T241-RD129



BLUE TEXTURE  
C241-BL544




OIL RUBBED  
BRONZE TEXTURE  
T291-BR251


### Vein:



BLACK/WHITE  
VEIN  
T075-WH34



SILVER VEIN  
T375-BK26



COPPER VEIN  
EXTERIOR  
T075-BK211



GOLD VEIN  
T375-BK10



COPPER VEIN  
T375-BK07

