SDTL SERIES Commercial Light


SDTL-4FT-20-30W-MCTP-BK


POWER & CCT- ADJUSTABLE LINEAR TUBE DECORATIVE SUSP. LIGHT











Canopy Dimension: 11 4/5"(L) x x 1.6"(D) x 4 1/5"(W)

Features

- LED Superior Architectural Lights
- Opal Polycarbonate Tube Lens Direct Down Light, The Fixture Can Be Reversed To Face Up For Indirect Lighting
- Pendant Mounted

- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- 5-Year Warranty
- Aluminum Housing With Sandy Black Finish

Technical Specifications

Electrical:

Voltage: 120-277V AC 50/60Hz
 Wattage: 20W/25W/30W
 Power Factor: >0.95

Total Harmonic Distortion: ≤19 %

LPW: 105LM/W

Mechanical:

- Aluminum Housing With Sandy Black Finish
- Two 10FT Adjustable Suspension Cables
- Pendant Mounted
- Black Painted Parts Are Treated With A Five-Stage Phosphate Bonding Process And Finished With High Reflectance Baked Ename
- Opal Polycarbonate Tube Lens Direct Down LightOperating Temperature: -22°F to +104°F
- IP Rating: IP20, Suitable for damp location
- 5-Year Warranty

Lighting:

- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- Dimmable: 0~10V Dimming
- Total Lumens: 3150LM
- Color Temperatures: 3000K/3500K/4000K
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 115°(H) x 109.6°(V)
- 50,000 Hours Rated Life

Applications:

- Ideal for offices, Hotels, Corridors, Saloons, Libraries, Meeting Rooms, Conference Halls, And The Best Solution For Modern Lighting Solutions
- It Can Be Ssed In Sny Indoor Applications

Other Models:

30W | 3150LM | SDTL-4FT-20-30W-MCTP












Photometrics: SDTL-4FT-20-30W-MCTP-BK





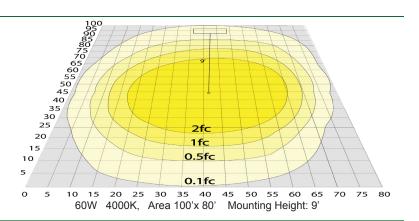

Other Views:







Side View Front View Bottom View

Performance Table: SCP-8FT-40-60W-MCTP-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SDTL-4FT-20-30W-MCTP-BK	20W	120~277V	2100	3000K 3500K 4000K	B1-U2-G1	105
	25W		2625			
	30W		3150			

Sample Ordering

Model	Size	Wattage	Wattage Color Temp.	Finish
SDTL -	4FT	_ 20 _	30W – MCTP –	BK

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY

OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING

FACTORY-INSTALLED OPTIONS:





OPT-EM-SL1INT

Example:

1.SCP-8FT-40-60W-MCTP-BK

(For SCP 60W MCTP fixture 120-277V)

2.SCP-8FT-40-60W-MCTP-BK OPT-EM-SL1INT (For SCP 60W MCTP fixture 120-277V) (EMERGENCY BACKUP INTERNAL BATTERY)





