


SDTL SERIES Commercial Lighting

SDTL-6FT-25-50W-MCTP
POWER & CCT- ADJUSTABLE LINEAR TUBE DECORATIVE SUSP. LIGHT

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

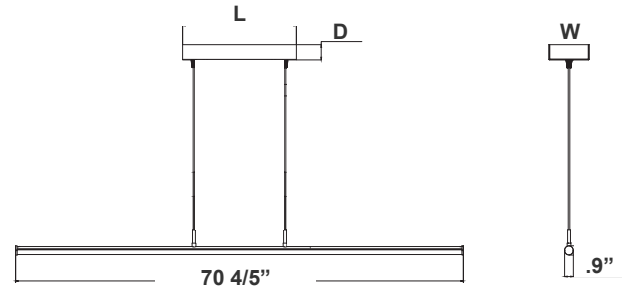

Canopy Dimension: 11 4/5" (L) x 1.6" (D) x 4 1/5" (W)

A modern decorative Euro-design suspended light suitable for conference tables, creative offices and department stores.

Features

- LED Superior Architectural Lights
- Opal Polycarbonate Tube Lens - Direct Down Light
- Pendant Mounted
- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- 5-Year Warranty
- Aluminum Housing With Sandy White Finish

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 25W/40W/50W
- Power Factor: >0.95
- Total Harmonic Distortion: ≤19 %
- LPW: 105LM/W

Mechanical:

- Aluminum Housing With Sandy White Finish
- Two 10FT Adjustable Suspension Cables
- Pendant Mounted
- White Painted Parts Are Treated With A Five-Stage Phosphate Bonding Process And Finished With High Reflectance Baked Enamel
- Opal Polycarbonate Tube Lens - Direct Down Light
- Operating Temperature: -22°F to +104°F
- IP Rating: IP20, Indoor Use Only
- 5-Year Warranty

Lighting:

- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- Dimmable: 0~10V Dimming
- Total Lumens: 5250LM
- Color Temperatures: 3000K/3500K/4000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 115°(H) x 109.6°(V)
- 50,000 Hours Rated Life

Applications:

- Ideal for offices, Hotels, Corridors, Saloons, Libraries, Meeting Rooms, Conference Halls, And The Best Solution For Modern Lighting Solutions
- It Can Be Used In Any Indoor Applications

Other Models:

- 50W | 5250LM | SDTL-6FT-25-50W-MCTP-BK





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-04102022

Photometrics: SDTL-6FT-25-50W-MCTP

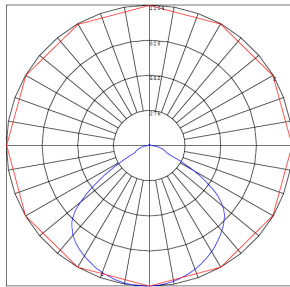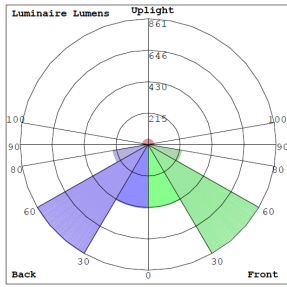

BUD Rating: B1-U2-G1

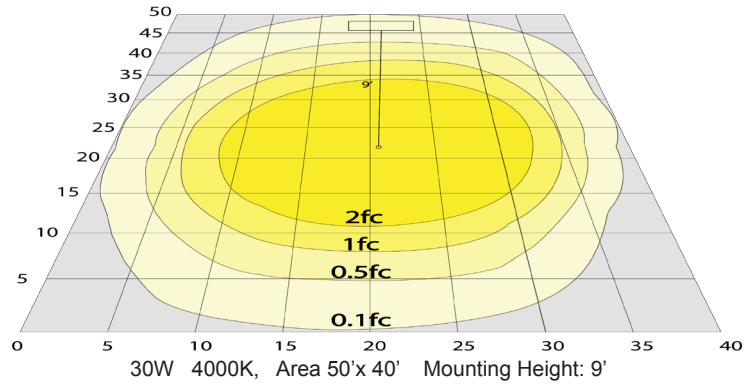


Other Views:



Side View



Front View

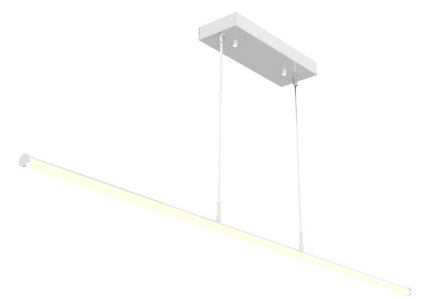

Bottom View

Performance Table: SDTL-6FT-25-50W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SDTL-6FT-25-50W-MCTP	25W	120~277V	2625	3000K 3500K 4000K	B1-U2-G1	105
	40W		4200			
	50W		5250			

Sample Ordering

Model Size Wattage Wattage Color Temp.

SDTL - 6FT - 25 - 50W - MCTP

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY

OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING

FACTORY-INSTALLED OPTIONS:



OPT-SEN-2US



OPT-EM-SL1INT

Example:

1.SDTL-6FT-25-50W-MCTP (For SDTL 50W MCTP fixture 120-277V)

2.SDTL-6FT-25-50W-MCTP (For SDTL 50W MCTP fixture 120-277V)
OPT-EM-SL1INT (EMERGENCY BACKUP INTERNAL BATTERY)

