

# SDTL SERIES Commercial Lighting

SDTL-8FT-40-60W-MCTP-BK


POWER & CCT- ADJUSTABLE LINEAR TUBE DECORATIVE SUSP. LIGHT



Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ | Type: \_\_\_\_\_

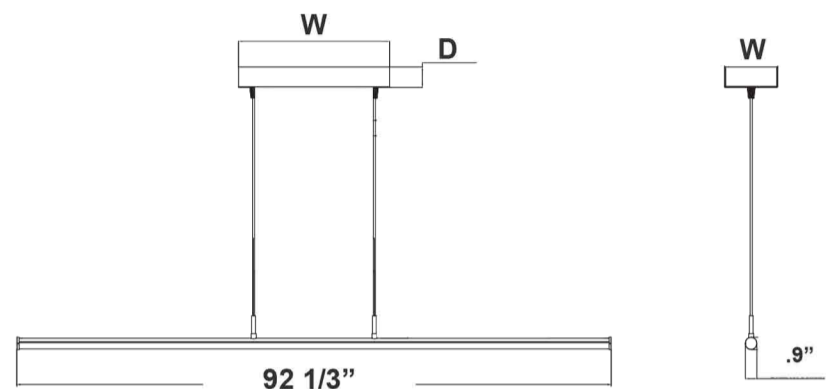

Canopy Dimension: 50"(W) x 1.6"(D) x 4 1/5"(W)

A modern decorative Euro-design suspended light suitable for conference tables, creative offices and department stores.

## Features

- LED Superior Architectural Lights
- Opal Polycarbonate Tube Lens - Direct Down Light
- Pendant Mounted
- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- 5-Year Warranty
- Aluminum Housing With Sandy Black Finish

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 40W/50W/60W
- Power Factor: >0.95
- LPW: 105LM/W
- Total Harmonic Distortion: ≤19 %

### Mechanical:

- Aluminum Housing With Sandy Black Finish
- Two 10FT Adjustable Suspension Cables
- Pendant Mounted
- Black Painted Parts Are Treated With A Five-Stage Phosphate Bonding Process And Finished With High Reflectance Baked Enamel
- Opal Polycarbonate Tube Lens - Direct Down Light
- Operating Temperature: -22°F to +104°F
- IP Rating: IP20, Indoor Use Only
- 5-Year Warranty

### Lighting:

- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- Dimmable: 0~10V Dimming
- Total Lumens: 6300LM
- Color Temperatures: 3000K/3500K/4000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 115°(H) x 109.6°(V)
- 50,000 Hours Rated Life

### Applications:



- Ideal for offices, Hotels, Corridors, Saloons, Libraries, Meeting Rooms, Conference Halls, And The Best Solution For Modern Lighting Solutions
- It Can Be Ssed In Sny Indoor Applications

### Other Models:


- 60W | 6300LM | SDTL-8FT-40-60W-MCTP



## Photometrics: SDTL-4FT-20-30W-MCTP-BK

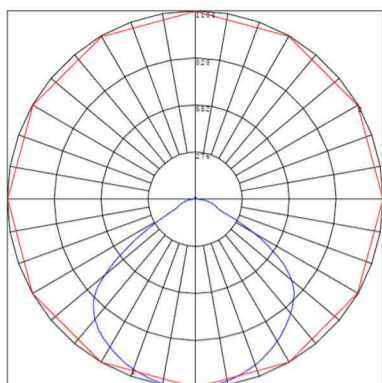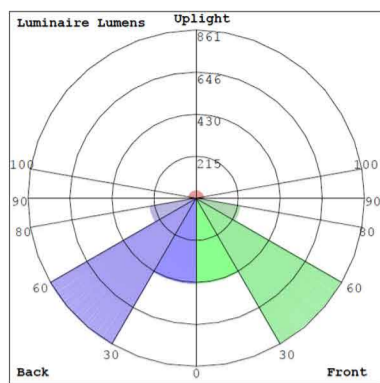

BUD Rating: B1-U2-G1

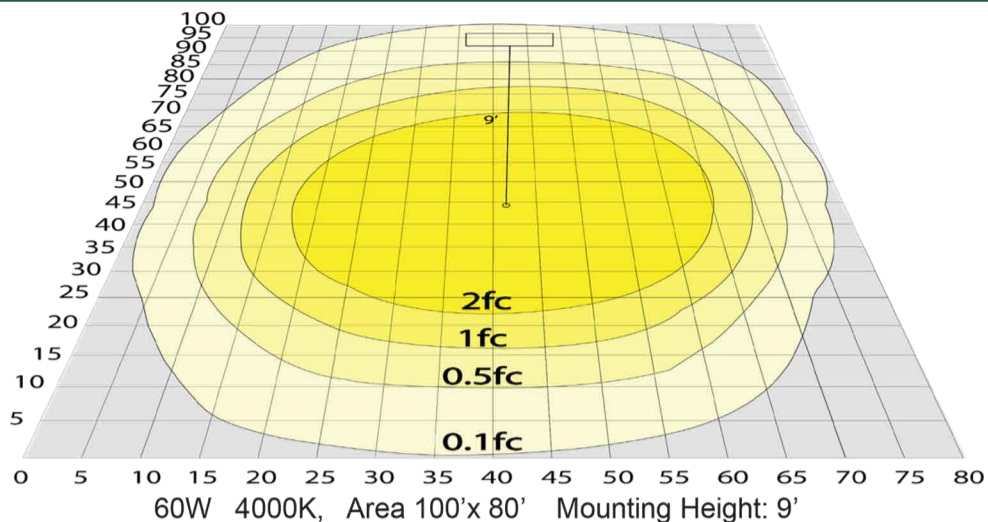


## Other Views:



Side View



Front View

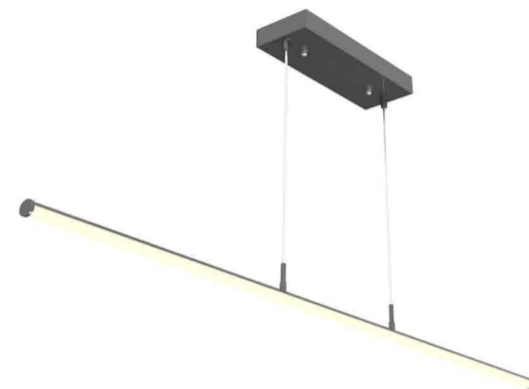

Bottom View

## Performance Table: SCP-8FT-40-60W-MCTP-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SDTL-8FT-40-60W-MCTP-BK	40W	120~277V	4200	3000K 3500K 4000K	B1-U2-G1	105
	50W		5250			
	60W		6300			

## Sample Ordering

Model	Size	Wattage	Wattage	Color Temp.	Finish
SDTL	4FT	20	30W	MCTP	BK

## Factory-Installed Options:

Blank = No Option For Accessories  
 OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY  
 OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING

## FACTORY-INSTALLED OPTIONS:



OPT-SEN-2US



OPT-EM-SL1INT

## Example:

- 1.SCP-8FT-40-60W-MCTP-BK (For SDTL 60W MCTP fixture 120-277V)
- 2.SCP-8FT-40-60W-MCTP-BK OPT-EM-SL1INT (For SDTL 60W MCTP fixture 120-277V) (EMERGENCY BACKUP INTERNAL BATTERY)

