SFL SERIES Commercial Lighting


SFL-4FT-60W-MCTP-GD

POWER & CCT- ADJUSTABLE LED SUSPENDED FRAME FIXTURES, MITP Multi Color Temperature & Multi Power/Wattage (Selectable)





13"

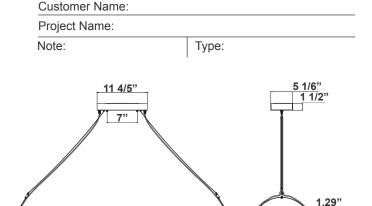

Canopy Dimension: 11 4/5"(L) x x 1 1/2"(D) x 5 1/6"(W)

A modern decorative Euro-design suspended light suitable for conference tables, creative offices and department stores.

Features

- · LED Superior Architectural Lights
- Opal Polycarbonate Tube Lens Direct Down Light
- Pendant Mounted

- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- 5-Year Warranty
- Aluminum Housing With Sandy White Finish

49"

Technical Specifications

Electrical:

Voltage: 120-277V AC 50/60HzWattage: 40W/50W/60W

Power Factor: >0.95

Total Harmonic Distortion: ≤19 %

LPW: 116LM/W

Mechanical:

- Aluminum Housing In Gold Sandy Finish
- Two 10FT Adjustable Suspension Cables
- Pendant Mounted
- White Painted Parts Are Treated With A Five-Stage Phosphate Bonding Process And Finished With High Reflectance Baked Ename
- Opal Polycarbonate Tube Lens Direct Down Light
- Operating Temperature: -22°F to +104°F
- IP Rating: IP20, Suitable For Damp Location
- 5-Year Warranty

Lighting:

Selection:

- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- Dimmable: 0~10V Dimming
- Total Lumens: 7000LM
- Color Temperatures: 3000K/3500K/4000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 115°(H) x 109.6°(V)
- 50,000 Hours Rated Life

Applications:

- Ideal for offices, Hotels, Corridors, Saloons, Libraries, Meeting Rooms, Conference Halls, And The Best Solution For Modern Lighting Solutions
- It Can Be Ssed In Sny Indoor Applications

Other Models:

• 60W | 7000LM | SFL-4FT-60W-MCTP

60W | 7000LM | SFL-4FT-60W-MCTP-GD











Photometrics: SFL-4FT-60W-MCTP-GD



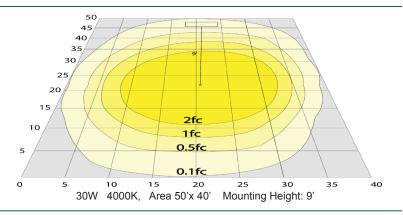

Other Views:







Side View

Front View

Back View

Performance Table: SFL-4FT-60W-MCTP-GD

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SFL-4FT-60W-MCTP-GD	40W	120~277V	4640	3000K	B1-U2-G1	116
	50W		5800	3500K 3500K 4000K		
	60W		7000			

Sample Ordering

Model		Size		Wattage Color Temp.				Housing
SFL	_	4FT	_	60W	_	МСТР	_	GD

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY

OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING

FACTORY-INSTALLED OPTIONS:





OPT-EM-SL1INT

