SFX SERIES OUTDOOR LIGHTING

SFX-G9-600W-30D-50K

LED STADIUM FLOOD LIGHTS

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name:

Project Name:

Note: | Type:



Selection:





18 1/3”(H) x 17 4/5”(W) x 21”(D)

Ideal for Stadium lighting, Sports fields, parking lots, docks ,railway and container yards, Architectural lighting, Industrial and commercial exterior lighting, trade shows, exhibitions

Features

- Die-Cast Aluminum Housing with Powder Coat Finish (Black)
- LED: Lumileds Luxeon SMD 5050
- 7-year Warranty
- Lens: Prismatic Polycarbonate Lens

Technical Specifications

Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 600W
- Power Factor: >0.90~0.97
- Efficacy: 150LPW

Mechanical:

- Die-Cast Aluminum Housing with Powder Coat Finish (Black)
- Cord type: 3’ SJTW 18/3 AWG Cable
- Effective Projected Area (EPA): 1.8 (sq. ft.)
- Operating Temperature: -40°F to 176°F
- IP Rating: IP65, Suitable for Wet Locations
- 7-year Warranty

Lighting:

- Lens: Prismatic Polycarbonate Lens
- LED: Lumileds Luxeon SMD 5050
- Total lumens: 90000LM
- Color Temperatures: 5000K
- Color Rendering Index: CRI ≥ 70
- Rated Life: 70,000 Hrs
- Beam Angle: 30°

Applications:

- Stadium lighting, Sports fields, parking lots, docks, railway and container yards, Architectural lighting, Industrial and commercial exterior lighting, trade shows, exhibitions.

Other Model:

- 1000W | 150000LM | SFX-G9-1000W-30D-50K

UL LISTED WET LOCATION

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

WG-ZA-Z7-2Z

Photometrics: SFX-G9-600W-30D-50K



BUG Rating: B5-U0-G2

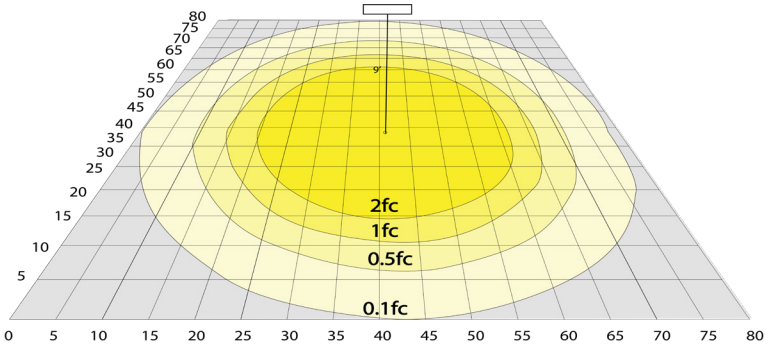

600W 5000K, Area 80'x 80' Mounting Height: 9'

Other Views:



Shown with optional shroud



Front View



Back View

Performance Table: SFX-G9-600W-30D-50K

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SFX-G9-600W-30D-50K	600W	120~277V	90000LM	5000K	B5-U0-G2	150

Sample Ordering

Model	Style	Watt	Size	Color Temp.
SFX	G9	600W	30D	50K

Accessories:

Blank = No Option For Accessories
SFX-G9-SH1= SHROUD FOR G9 600W STADIUM LIG
SFX-G9-SF= SLIP FITTER, COMES WITH ITS OWN REPLACEMENT "U" BRACKET

ACCESSORIES:



SFX-G9-SH1



SFX-G9-SF

Example:

1. **SFX-G9-600W-30D-50K** (FOR SFX 600W 50K FIXTURE 120-277V)
2. **SFX-G9-600W-30D-50K** (FOR SFX 600W 50K FIXTURE 120-277V)
   SFX-G9-SH1 (SHROUD FOR 600W)