

SL SERIES Outdoor Lighting

SL-10W-30K-BZ-D
SL-10W-50K-BZ-D
LED SQUARE HEAD SECURITY LIGHTS

MCT Multi Color Temperature (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

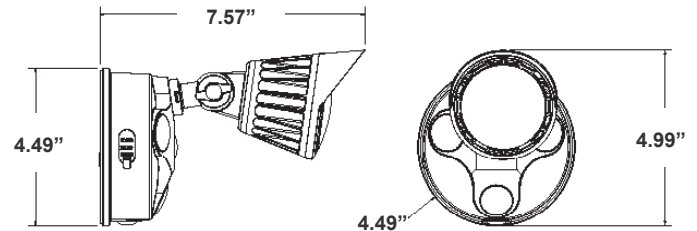

7.57"(W) x 4.49"(H) x 4.99"(D)

LED Security Light with double head, base and PIR sensor
Dim mode Suitable for Outdoor applications, Ideal for Ideal for doorway, pathway and alleys and Great for use with optional motion sensors or photocell.

Features

- 7-Year Warranty
- Die-cast Aluminum, Powder Coated
- 2 Lamp Heads
- Multi-CCT: Selectable Switch is on the bottom of the base
- Lifespan: 70000 Hrs.

Technical Specifications

Electrical:

- Voltage: 120V AC, 50/60Hz
- Wattage: 10W
- Power Factor: .90~.97
- Efficacy: 95 LM/W

Mechanical:

- Fits on a 4" weatherproof box, flush mounts on wall over a junction box or plaster ring, or over a 3" pancake box
- Housing: Die-cast aluminum with powder coat finish
- Strict Waterproof Treatment Technology, in line with International Waterproof and Dust proof Standards
- Contains no mercury
- 2 Lamp Heads
- Operating Temperature: -40°F~104°F
- Suitable for Wet Location

Lighting:

- Multi-CCT: Selectable Switch Is On The Bottom Of The Base
- Color Temperature: 3000K/5000K
- Total Lumens: 950LM
- Color Rendering index: >80
- Beam Angle: 100°
- Lifespan: 70000 Hrs.

Applications:

- Ideal for Ideal for doorway, pathway and alleys
- Great for use with optional motion sensors or photocell

Other Model:


- 10W | 950LM | SL-10W-30K-WH-D
- 10W | 950LM | SL-10W-50K-WH-D




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: SL-10W-BZ-D



BUG Rating: B1-U1-G0

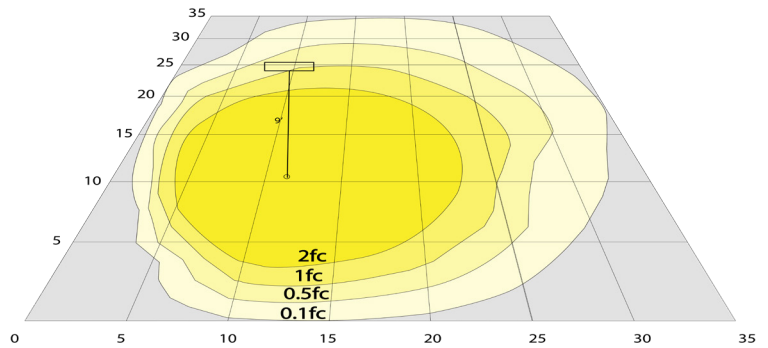

10W, 5000K Area 35'x 35' Mounting Height: 9'

Other Views:



Side View



Front View

Performance Table: SL-10W-BZ-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SL-10W-30K-BZ-D SL-10W-50K-BZ-D	10W	120V	950LM	3000K 5000K	B1-U1-G0	95

Sample Ordering

Model	Min. Watt	Color Temp.	Housing	Dimming
SL	10	30K = 3000K 50K = 5000K	BZ	D

Accessories:

Blank = No Option
 SL-PC = 120VAC, UL-RECOG MINIATURE PHOTOCELL "FOR SL SERIES ONLY" 100W Max Load
 SL-PIR-BZ = 180° 350W Max Load, MOTION SENSOR (WHITE OR BRONZE) WITH LONG ARM CAN BE USED WITH ALL OUTDOOR FIXTURES
 SL-HPIR-BZ = 240° 350W Max Load, MOTION SENSOR (WHITE OR BRONZE) CAN BE USED WITH ALL OUTDOOR FIXTURES

Accessories:



SL-PC



SL-PIR-BZ



SL-HPIR-BZ

