


SLRP SERIES Commercial Lighting

SLRP-4FT-20-40W-MCTP
PREMIUM STRIP-LIGHT LED RETROFIT KIT WITH LENS
MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____



LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc. Engineered with stable performance LED engines and the world's top brand LED driver. Same footprint as traditional 2-lamp strip lights

48"(L) x 4 2/3"(W) x 3 4/9"(H)

Features

- LED Strip Lights
- Strip Line Cover
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Frosted Diffuse Polycarbonate Lens with Strip Lines Inside
- MCTP: Multi Color Temperature & Multi Power/Wattage (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W/30W/40W
- Power Factor: >0.98
- Efficacy: 127 LPW

Mechanical:

- White Finish
- Housing: Heavy Die-Formed Steel, White Powder Coated
- Lens Snaps into the tabs of the Housing Fixture
- Ceiling-Mounted
- Same Footprint as Traditional 2-lamp Strip Lights
- Mounting: Surface Mount, Wall Mount or Suspended
- Operating Temperature: -22°F -104°F
- IP Rating: IP44

Lighting:

- Dimmable: 0~10V Dimming
- Chip: Samsung
- Total Lumens: 5080LM Max.
- Color Temperatures: 3500K/4000K/5000K
- Multi-CCT (selectable switch inside fixture)
- Color Rendering Index: CRI ≥ 80

Applications:



- Ideal for architectural lighting solutions, a variety of industrial, commercial and residential applications

Other Models:


- 80W | 10160LM | SLRP-8FT-40-80W-MCTP



Photometrics: SLRP-4FT-20-40W-MCTP



BUD Rating: B1-U3-G2

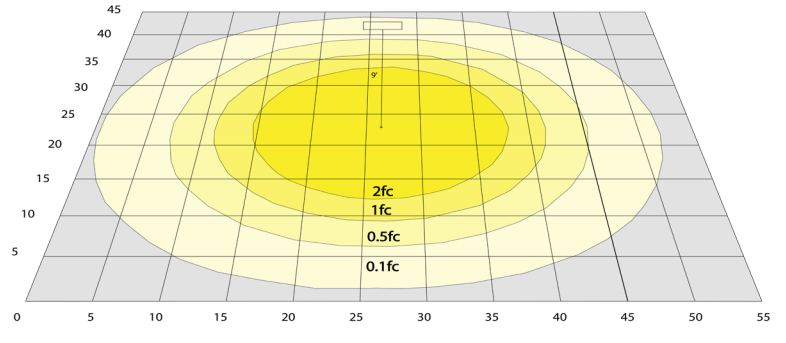

Area 45'x 55' Mounting Height: 9'

Other Views:



Front View



Side View

Performance Table: SLRP-4FT-20-40W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SLRP-4FT-20-40W-MCTP	20W 30W 40W	120~277V	2540LM 3810LM 5080LM	3500K 4000K 5000K	B1-U3-G2	127

Sample Ordering

Model	Size	Wattage	Wattage	Color Temp.
SLRP	4FT	20	40W	MCTP

Accessories:

Blank = No Option For Accessories
 LSL-4FT-WG = WIRE GUARD KIT FOR 4FT. STRIP LIGHT
 LSL-4FT-WK = SHOP LIGHT WING KIT

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-CM1INT= INTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING
 OPT-SEN-2USRC = OPTIONAL RC
 OPT-SEN-LLHB-OC1 = LLHB-OC1 EXTERNAL STANDARD PIR OPT-SENSOR
 OPT-SEN-DAYLIGHT = DAYLIGHT HARVESTING SENSOR WORKS WITH ABOVE OPT-SEN-2US

FACTORY-INSTALLED OPTIONS:



OPT-EM-CM1INT



OPT-SEN-2US



OPT-SEN-LLHB-OC1



OPT-SEN-2USRC



OPT-SEN-DAYLIGHT

