SOLS SERIES


Outdoor Lighting




SOLS-2FT-60K

SOLAR SIGN AND BILI BOARD LIGHTS







23 3/4"

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

4 3/5"(H) X 23 3/4"(W)

Features

- 7-Year Warranty
- Robust Aluminum Alloy + Polycarbonate Cover
- Lifespan: 70000 Hrs.
- Lens: TYPE III TIR optic Lens

Technical Specifications

Electrical:

LED Wattage: 10WPower Factor: 0.95Efficacy:100 LM/W

Mechanical:

- Robust Aluminum Alloy + Polycarbonate Cover
- Operating temperature: 14°F to 122°F
- IP Rating: IP65

Lighting:

Lens: TYPE III Optic Lens

• LED: Lumileds Luxeon 5050

Total Lumens: 1000LMColor Temperature: 6000K

• Color Rendering Index: >70


Lifespan: 70000 Hrs.

Applications:

Ideal For Ideal for Doorway, Pathway And Alleys

Battery:

- Operation on Full Charge: 6-8 hrs. Depending on the Sunlight Quality, See The Map On Page 3
- Battery Type: Lithium-ion 5200mAh
- Battery Life: More than 2000 Cycles (2000/365 days = 5.47 years) With Overcharge And Over-Discharge Protection



Working mode: Dusk to Dawn Full Brightness for First 5Hrs. Dim to 25% for 7Hrs.

Other Model:


• 5W | 500LM | SOLS-1FT-MCT


• 20W | 2000LM | SOLS-4FT-60K






Photometrics: SOLS-2FT-60K





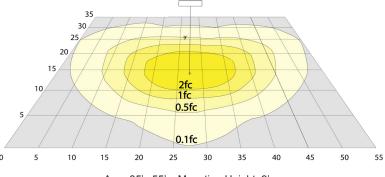

BUG Rating: B1-U2-G0

Area 35'x 55' Mounting Height: 9'

Other Views:







Side View

Front View Back View

Performance Table: SOLS-2FT-60K

MODEL NO.	LED WATTS	Lumens	Color Temp.	BUG Rating	LPW
SOLS-2FT-60K	10W	1000LM	6000K	B1-U2-G0	100

Sample Ordering

Model

Size

Color Temp.

SOLS

2FT

60K



Average Daily Solar Radiation Per Month:

Increasing the tilt 15° in the winter or decreasing 15° in the summer gives the maximum sunlight for recharging the battery.

