



SOLW SERIES

OUTDOOR LIGHTING


SOLW-FSP-MS-40K

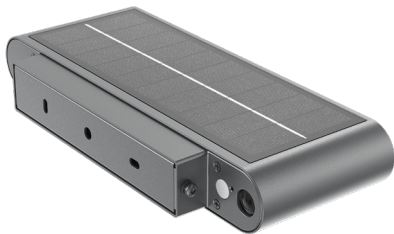


Back View

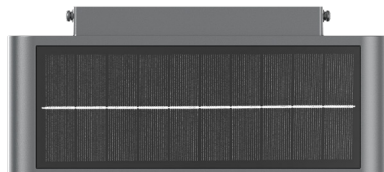

Solar View

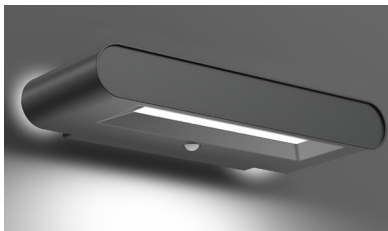

Night View

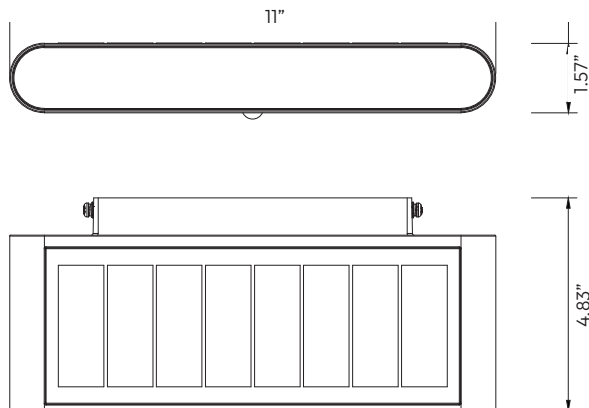

Technical Drawing: 1.57" (D) x 11" (W) x 4.83" (H)

The LedgeRay Solar Luminaire features a programmable remote control and integrated motion sensor, providing energy-efficient solar-powered illumination. Designed for versatile outdoor applications, it offers convenient wireless control and adjustable lighting modes for reliable performance.

Customer Name:

Project Name:

Note:

Type:

FEATURES:

- No trenching or utility wiring required
- Zero electricity operating cost
- Ideal for residential and commercial perimeter lighting
- Fast surface mount installation

SPECIFICATIONS:

ELECTRICAL:

- PWM smart solar charge controller
- 3.2W mono crystalline solar panel
- 5V panel voltage
- 3W nominal LED power
- Up to 345 lumens output
- 115 lm/W efficacy @ 4000K
- Electrical Class III

MECHANICAL:

- IK08 impact-resistant housing
- IP65 weatherproof construction
- C3 corrosion-resistant powder coating
- 90° symmetrical light distribution
- Mono crystalline solar panel
- Replaceable lithium battery design

BATTERY:

- Wattage & CCT Selectable Switches inside fixture
- Lumens: 345LM Max.
- Color Temperatures: 4000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle : 135°
- Lifespan: 50000 Hours

BATTERY:

- Battery Type: Ternary lithium battery
- Voltage: 3.7V
- Capacity: 2.6Ah
- Energy: 9.62Wh
- Cycle Life: >1,000 cycles at 80% DOD
- Operating Time: Full power 3-3.5 hours / Intelligent mode up to 1.5 days
- Charging Time: 4.2 hours (under full sunlight conditions)

BATTERY:


- 110° horizontal sensing angle
- Recommended mounting height 6.5-8 ft
- 30-second motion activation
- Detection range up to 16 ft

APPLICATIONS:

- Ideal for exterior walls, walkways, entrances, and building perimeters requiring reliable solar-powered lighting with motion-activated security.

PHOTOMETRICS

BUG rating



Rating: B0 U1 G0

Forward Light

Low (0-30°)	62.03	17.5%
Medium (30-60°)	94.94	26.7%
High (60-80°)	19.45	5.47%
Very High (80-90°)	0.3665	0.103%

Back Light

Low (0-30°)	62.03	17.5%
Medium (30-60°)	94.94	26.7%
High (60-80°)	19.45	5.47%
Very High (80-90°)	0.3665	0.103%


Uplight

Low (90-100°)	60.41	0.0170%
High (100-180°)	1.678	0.472%
Total		
Sum	355.3	100%

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG Rating: B0-U1-G0

Iso-illuminance plot



50.0 %	0.842 fc
30.0 %	0.505 fc
10.0 %	0.168 fc
5.0 %	0.084 fc
3.0 %	0.051 fc

Peak illuminance: 1.68 fc
Mounting height: 10 ft
Number of c-planes: 24

Area 24'x24'

PERFORMANCE TABLE

MODEL NO.	WATTAGE	VOLTAGE	LUMENS	COLOR TEMP.	BUG RATING	LPW
SOLW-FSP-MS-40K	3W	120-277V	345LM	4000K	B0-U1-G0	115

LIGHTING MODE

1


Sunset



Midnight




Sunrise

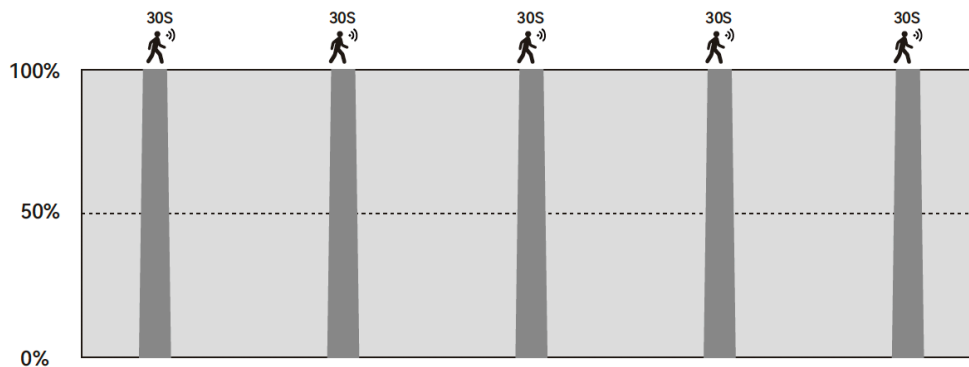


Mode 1	Working hours	From sunset to sunrise
	Not detected	0%
	Detected	100%
	Light up for 30 seconds when detected	

2

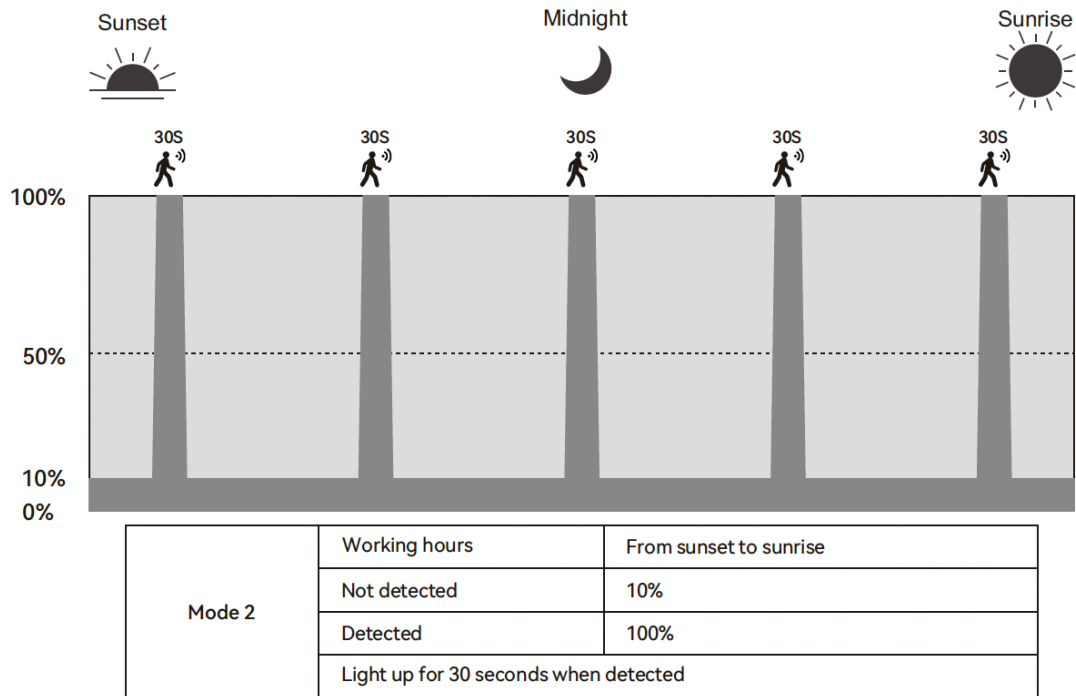


3

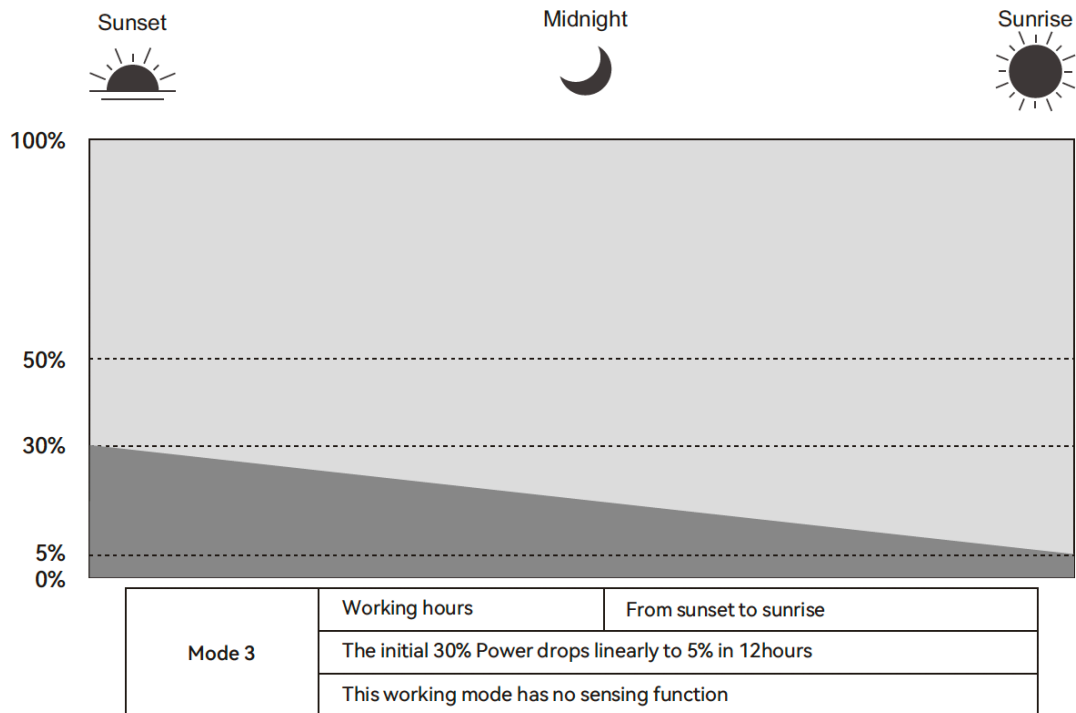

REMOTE CONTROL DESCRIPTION

Optional

Remote control distance (2-3 m)


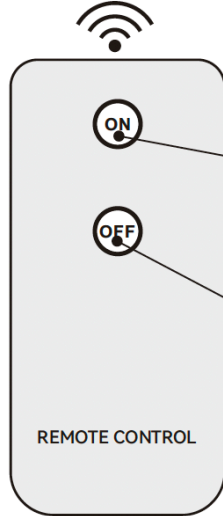


* Cyclic switching: Turn on the light(work mode 1)/ work mode 2/work mode 3/ turn off the light

* Turn off the light

PIR SENSING DISTANCE


Recommended mounting height (2-2.5 m)

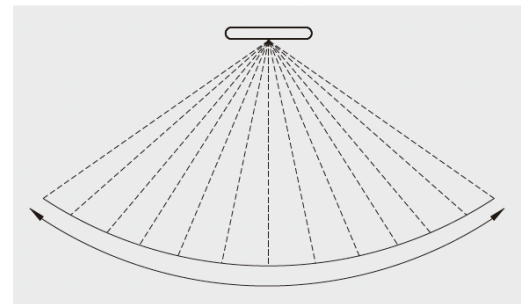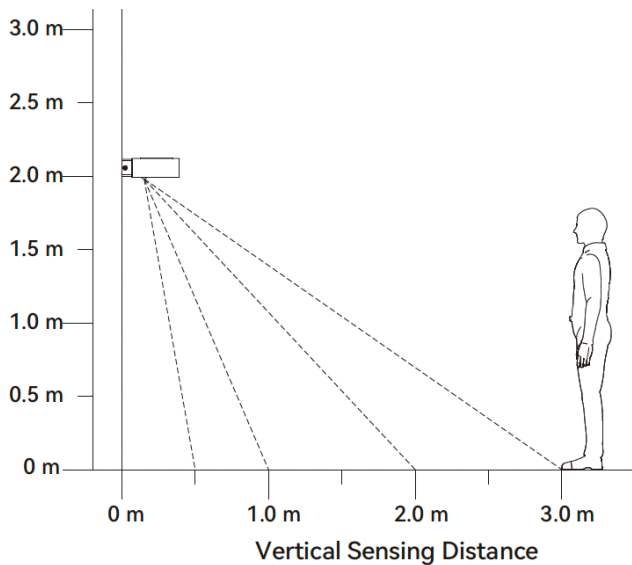

Horizontal Sensing Angle (110°)

AVERAGE DAILY SOLAR REDIATION PER MONTH

Increasing the tilt 15° in the winter or decreasing 15° in the summer gives the maximum sunlight for recharging the battery.

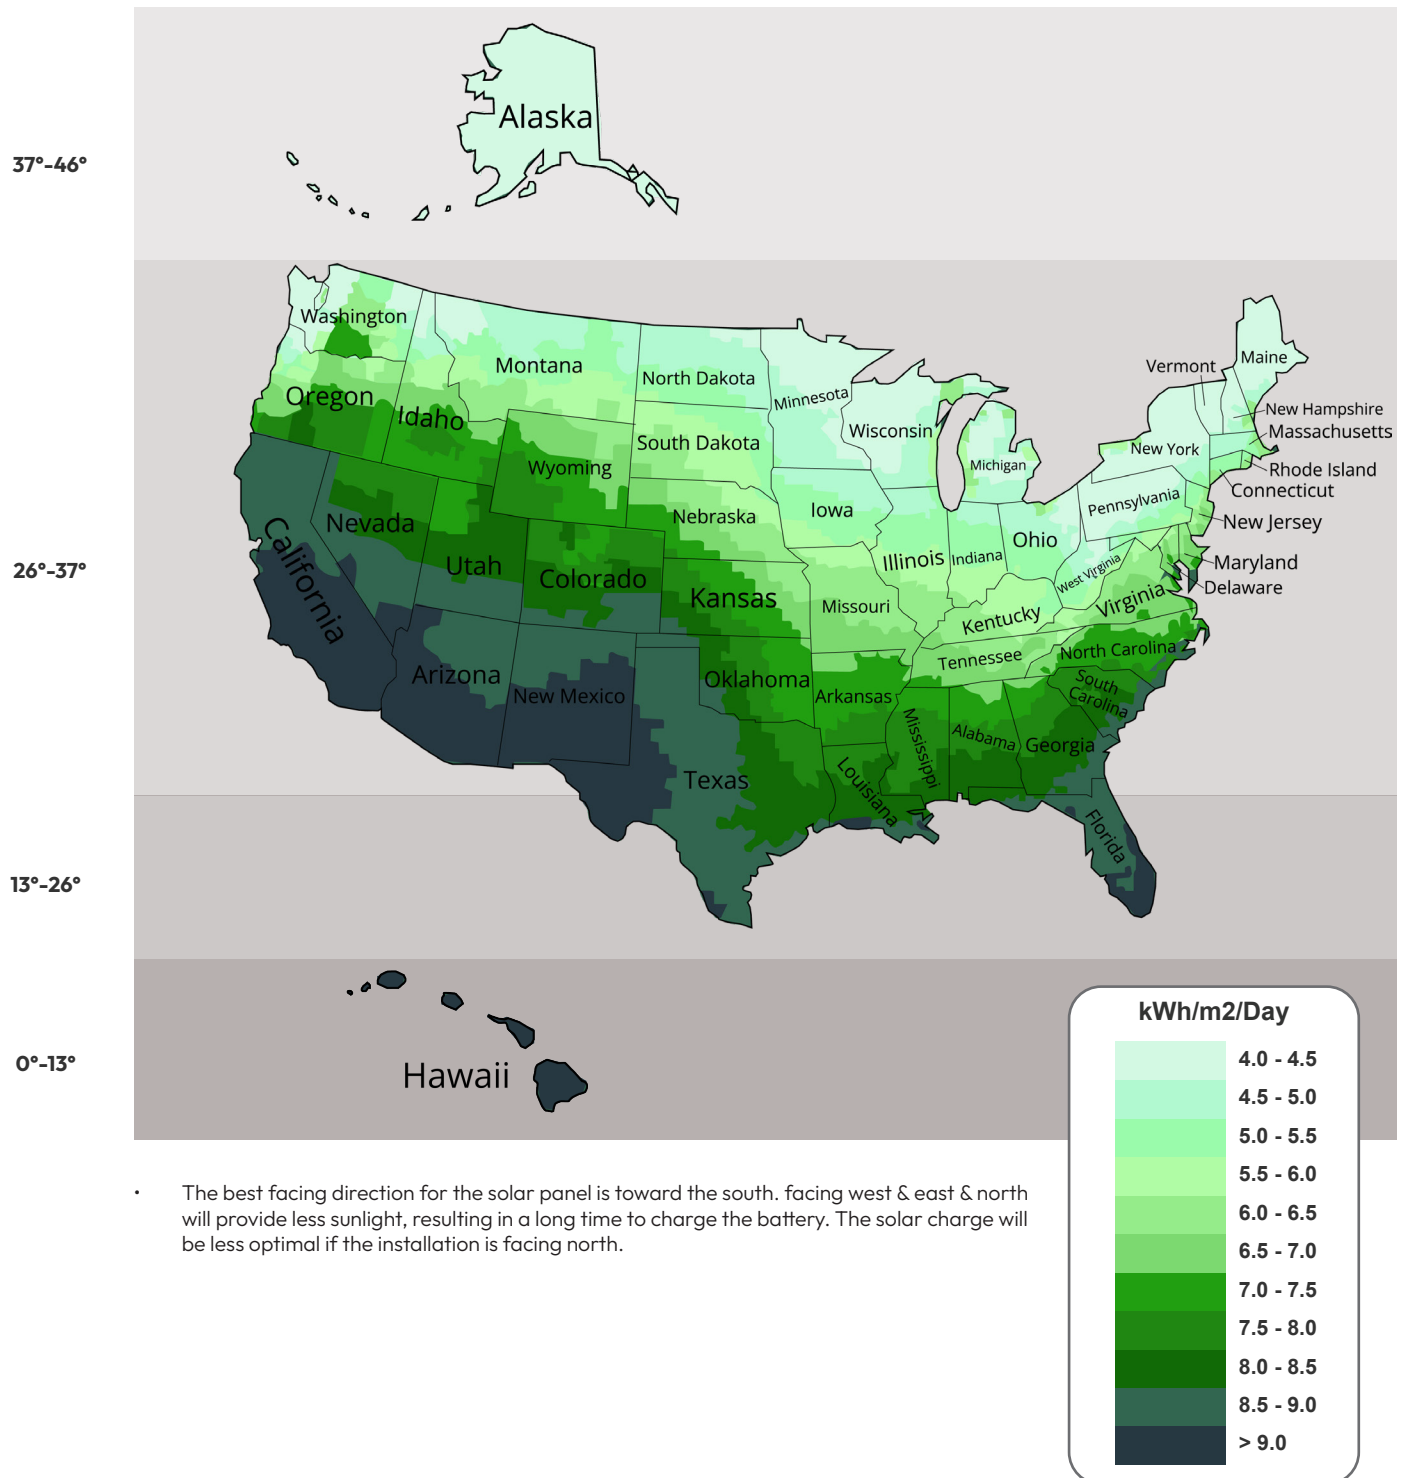

- The best facing direction for the solar panel is toward the south. facing west & east & north will provide less sunlight, resulting in a long time to charge the battery. The solar charge will be less optimal if the installation is facing north.