

# SRC SERIES Commercial Lighting

## SRC-D36UD-MCTP

HIGH-OUTPUT ROUND LINEAR CHANDELIER, UP/DOWN LIGHT WITH SEPARATE CONTROLS, POWER AND CCT ADJUSTABLE

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

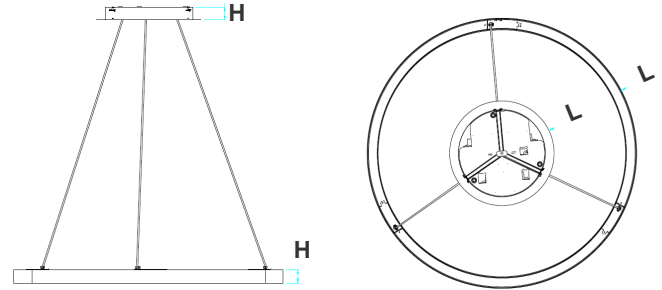

**Canopy Dimension: 13 3/4" (L) x 1 3/4" (H)**  
**Fixture Dimension: 36" (L) x 1 3/4" (H)**

Elevate your space with our High-Output Round Linear Chandelier, featuring versatile up and down lighting capabilities and separate controls for customized ambiance. With its sleek design and powerful illumination, this fixture adds sophistication while providing practical lighting solutions. Experience the perfect blend of style and functionality with Westgate's innovative lighting options.

## Features

- LED Superior Architectural Lights
- Aluminum Housing With Sandy Finish
- Pendant mount
- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- 5-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 40W/50W/60W (Uplight Switchable)/ 40W/50W/60W (Downlight Switchable)
- Power Factor: >0.98
- LPW: 75 LM/W

### Mechanical:

- Aluminum Housing With Sandy Finish
- Three 10FT Adjustable Suspension Cables
- Opal Polycarbonate Lens - Direct and Indirect Light
- Operating Temperature: -46°F to 104°F
- IP Rating: IP20
- 5-Year Warranty

### Lighting:

- Dimmable: 0~10V Dimming
- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- Total Lumens: Up: 3120/3900/4680LM Down: 3000/3750/4500LM
- Color Temperatures: 3000K/3500K/4000K
- Color Rendering Index: CRI ≥ 80,90 Optional
- Beam Angle: 114°(H) x 114°(V)
- 50,000 Hours Rated Life
- 

### Applications:

- Ideal For Office ,Architectural Lighting And Create Different Visual Experience.





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-04102022

**Photometrics:** SRC-D36UD-MCTP

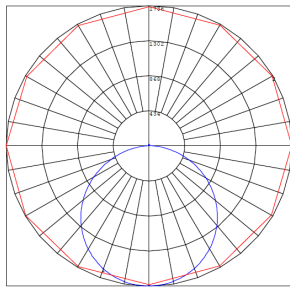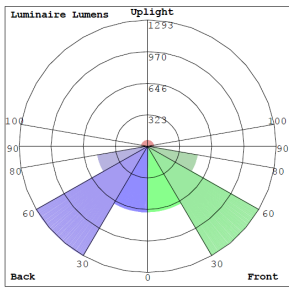

BUD Rating: B2-U3-G1

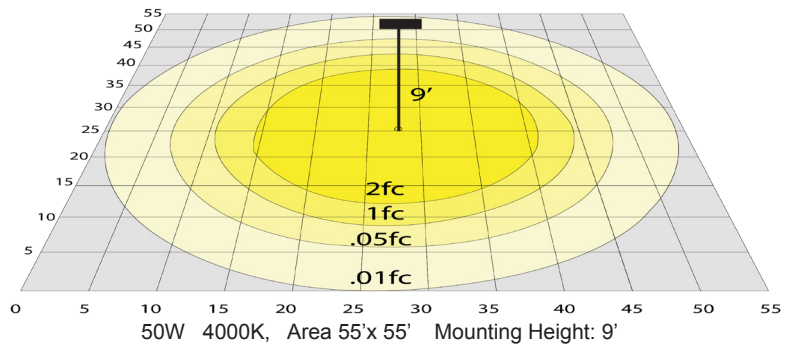

**Performance Table:** SRC-D36UD-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SRC-D36UD-MCTP	40W	120~277V	3000	3000K	B2-U3-G1	75
	50W		3750	3500K		
	60W		4500	4000K		

**Sample Ordering**

**Model      Size      Color Temp.**

SCR   -   D36UD   -   MCTP

