

SRC SERIES Commercial Lighting

SRC-D48UD-MCTP

HIGH-OUTPUT ROUND LINEAR CHANDELIER, UP/DOWN LIGHT WITH SEPARATE CONTROLS, POWER AND CCT ADJUSTABLE

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

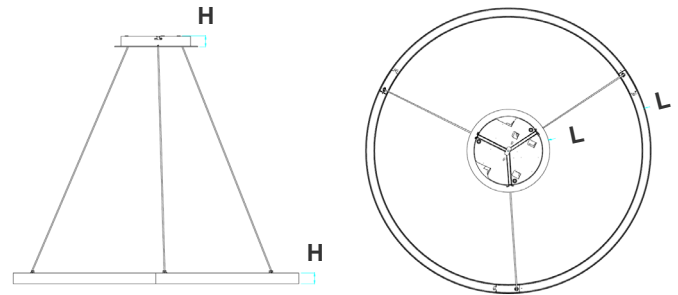

Canopy Dimension: 13 3/4"(L) x 1 3/4"(H)
Fixture Dimension: 48"(L) x 1 3/4"(H)

Elevate your space with our High-Output Round Linear Chandelier, featuring versatile up and down lighting capabilities and separate controls for customized ambiance. With its sleek design and powerful illumination, this fixture adds sophistication while providing practical lighting solutions. Experience the perfect blend of style and functionality with Westgate's innovative lighting options.

Features

- LED Superior Architectural Lights
- Aluminum Housing, Sandy White Finish
- Pendant mount
- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- 5-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 0W/60W/80W (Uplight Switchable)
0W/60W/80W (Downlight Switchable)
- Power Factor: >0.98
- LPW: 75 LM/W

Mechanical:

- Aluminum Housing, Sandy White Finish
- Three 10FT Adjustable Suspension Cables
- Opal Polycarbonate Lens - Direct and Indirect Light
- Operating Temperature: -46°F to 104°F
- IP Rating: IP20
- 5-Year Warranty

Lighting:

- Dimmable: 0~10V Dimming
- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- Total Lumens: Up: 6000LM Max. Down: 6000LM Max.
- Color Temperatures: 3000K/3500K/4000K
- Color Rendering Index: CRI ≥ 80,90 Optional
- Beam Angle: 114°(H) x 114°(V)
- 50,000 Hours Rated Life

Applications:

- Ideal For Office ,Architectural Lighting And Create Different Visual Experience.





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-04102022

Photometrics: SRC-D48UD-MCTP

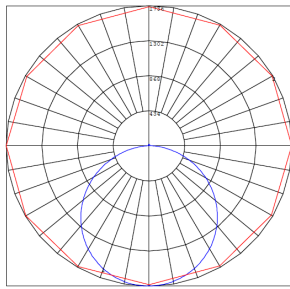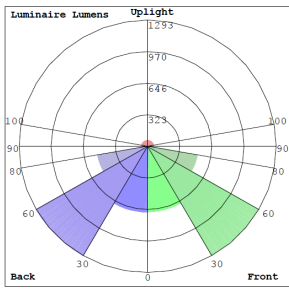

BUD Rating: B2-U3-G1

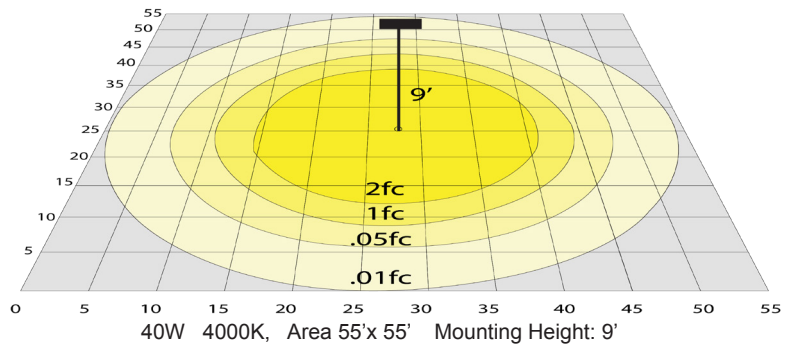

Performance Table: SRC-D48UD-MCTP

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|----------------|---------|----------|--------|-------------|------------|-----|
| SRC-D48UD-MCTP | 0W | 120~277V | 0 | 3000K | B2-U3-G1 | 75 |
| | 60W | | 5250 | 3500K | | |
| | 80W | | 6000 | 4000K | | |

Sample Ordering

Model Size Color Temp.

SRC - D48UD - MCTP

