

SRL6 SERIES Commercial Lighting

SRL6-2FT-MCTP

SLOT RECESSED COMMERCIAL LINEAR LIGHTS, 6" WIDE

MCT Multi Color Temperature (Selectable)



This indoor commercial LED Backlit panel light is ideal for hotels, offices, retail outlets, restaurants, parking garages, storage rooms, conference rooms, education facilities, and more.

Features

- Soft and Wide Light-Emitting
- 50,000 Hours Rated Life
- No infrared rays, No Ultraviolet Radiation, No Thermal Effect
- Earthquake hooks and Suspension Hooks Pre-Installed
- No flickering, No humming, No RF interference
- Multi Color Temperature & Multi Power (Selectable Switch on Back of Fixture)

Technical Specifications

Electrical:

- Voltage: AC120V-277V 50/60Hz
- Power Factor: >0.90
- Wattage: 10W/15W/20W
- Efficacy: 110 LPW
- Fixture Operating Voltage: 36VDC
- Rated Input Current (mA): 337/ 253/ 168mA
- Total Harmonic Distortion: ≤ 20 %

Mechanical:

- White Finish
- Earthquake Hooks and Suspension Hooks pre-installed
- External driver mounted on top
- Operating Temperature: -68°F~104°F
- Surge Protector: 1KV, 2.5KV
- Rated life: 50,000 hrs

Other Models:

• 40W | 4400LM | SRL6-4FT-MCTP • 80W | 8800LM | SRL6-8FT-MCTP

WESTGATE


THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

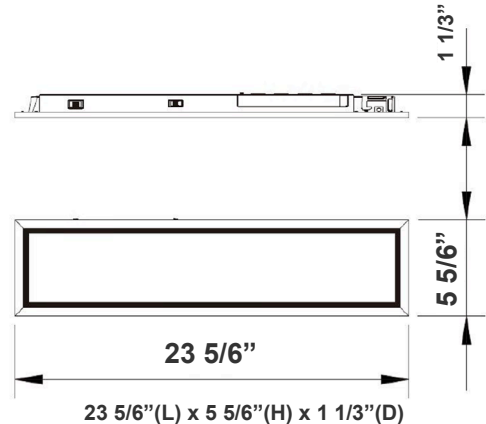

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 2200LM Max.
- Color Temperatures: 3500K/4000K/5000K
- Multi CCT & Multi Power (selectable switch on back of fixture)
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 110°
- 5-Year Warranty

Applications:

- Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-20240122

Photometrics: SRL6-2FT-MCTP



BUD Rating: B2-U2-G1

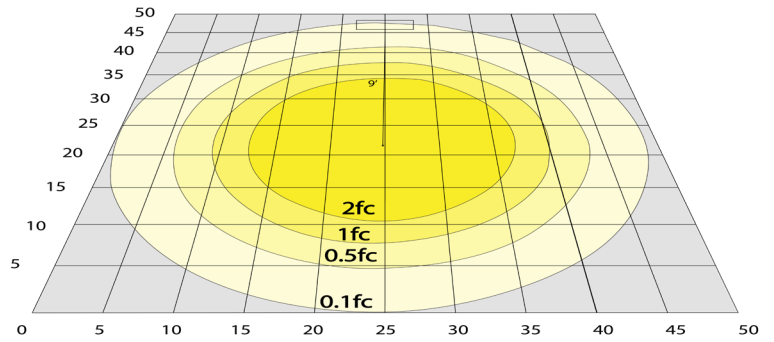

Simulation Based on 4000K Area 50'x 50' Mounting Height: 9'


Other Views:



Side View



Front View



Back View

Performance Table: SRL6-2FT-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SRL6-2FT-MCTP	10W 15W 20W	120~277V	1100LM 1650LM 2200LM	3500K/ 4000K/ 5000K	B2-U2-G1	110

Sample Ordering

Model **Size** **Watt/Color Temp.**

SRL6 - 2FT - MCTP

Accessories:

Blank = No Option For Accessories

WEC-2DLH-22 = DAYLIGHT HARVESTING

WEC-2CPDR = MOTION SENSOR

WEC-3RC = OPTIONAL REMOTE CONTROL

SRL6-2FT-DWK = 2FT 6IN SLOT RECESSED LINEAR LIGHT DRYWALL MOUNTING KIT

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-SRL6 = INTERNAL EMERGENCY BACKUP BATTERY

OPT-FWH-63= 6FT 3-WIRE WHIP

OPT-FWH-65= 6FT 5-WIRE WHIP

OPT-FWH-66= 6FT 6-WIRE WHIP

ACCESSORIES and MOUNTING KIT:



FACTORY-INSTALLED OPTIONS:

