

SRL6 SERIES Commercial Lighting

SRL6-8FT-MCTP

SLOT RECESSED COMMERCIAL LINEAR LIGHTS, 6" WIDE

MCT Multi Color Temperature (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

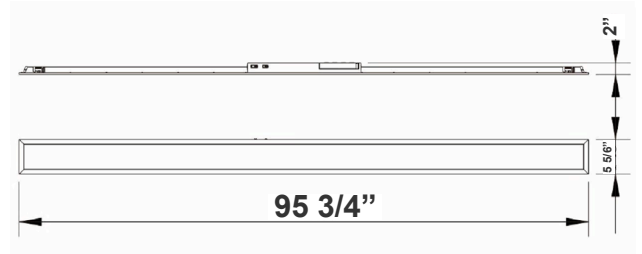

This indoor commercial LED Backlit panel light is ideal for hotels, offices, retail outlets, restaurants, parking garages, storage rooms, conference rooms, education facilities, and more.

95 3/4"(L) x 5 5/8"(H) x 2"(D)

Features

- Soft and Wide Light-Emitting
- 50,000 Hours Rated Life
- No infrared rays, No Ultraviolet Radiation, No Thermal Effect
- Earthquake hooks and Suspension Hooks Pre-Installed
- No flickering, No humming, No RF interference
- Multi Color Temperature & Multi Power (Selectable Switch on Back of Fixture)

Technical Specifications

Electrical:

- Voltage: AC120V-277V 50/60Hz
- Power Factor: >0.90
- Wattage: 40W/60W/80W
- Efficacy: 110 LPW
- Fixture Operating Voltage: 36VDC
- Rated Input Current (mA): 337/ 253/ 168mA
- Total Harmonic Distortion: ≤ 20 %

Mechanical:

- White Finish
- Earthquake Hooks and Suspension Hooks pre-installed
- External driver mounted on top
- Operating Temperature: -68°F~104°F
- Surge Protector: 1KV, 2.5KV
- Rated life: 50,000 hrs

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 8800LM Max.
- Color Temperatures: 3500K/4000K/5000K
- Multi CCT & Multi Power (selectable switch on back of fixture)
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 110°
- 5-Year Warranty

Applications:

- Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

Other Models:

• 20W | 2200LM | SRL6-2FT-MCTP • 40W | 4400LM | SRL6-4FT-MCTP





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-20240122

Photometrics: SRL6-8FT-MCTP



BUD Rating: B2-U2-G1

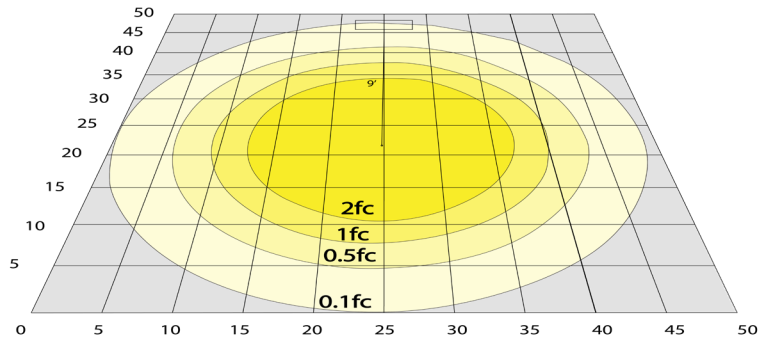


Simulation Based on 4000K Area 50'x 50' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: SSRL6-8FT-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SRL6-8FT-MCTP	40W 60W 80W	120~277V	2200LM 3300LM 4400LM	4400K/ 6600K/ 8800K	B2-U2-G1	110

Sample Ordering

Model **Size** **Watt/Color Temp.**

SRL6 - 8FT - MCTP

Accessories:

Blank = No Option For Accessories

WEC-2DLH-22 = DAYLIGHT HARVESTING

WEC-2CPDR = MOTION SENSOR

WEC-3RC = OPTIONAL REMOTE CONTROL

SRL6-8FT-DWK = 8FT 6IN SLOT RECESSED LINEAR LIGHT DRYWALL MOUNTING KIT

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-SRL6-8FT = INTERNAL EMERGENCY BACKUP BATTERY

OPT-FWH-63= 6FT 3-WIRE WHIP

OPT-FWH-65= 6FT 5-WIRE WHIP

OPT-FWH-66= 6FT 6-WIRE WHIP

ACCESSORIES and MOUNTING KIT:



WEC-2CPDR-3




WEC-3RC



WEC-2DLH-22



SRL6-8FT-DWK

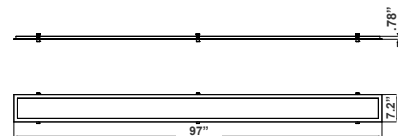

97"(L) x 7.2"(H) x .78"(D)

FACTORY-INSTALLED OPTIONS:



OPT-EM-SRL6-8FT



OPT-FWH-63

OPT-FWH-65

OPT-FWH-66

