


# SSL SERIES RESIDENTIAL LIGHTING

SSL4-MCT5-FR  
FIRE-RATED (2 HR) SLIM WAFER RECESSED LIGHT  
**MCT5** Multi Color Temperature (Selectable)



Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

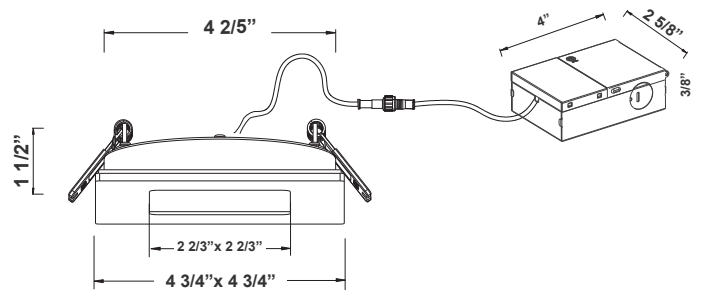

LED DOWNLIGHTS (SMOOTH TRIM) - 4" SQUARE Ideal for New As Well As Old Residential And Commercial Constructions.

4 3/4" x 1 1/2"  
Driver Box: 4" x 2-5/8" x 3/8"

## Features

- 4" Smooth Recessed Trim
- Multi CCT (Selectable Switch on the Back of the driver )
- Isolated Driver for Improved Thermal Management
- 5-Year Warranty
- Spun Aluminum with White Powder Coat Finish

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 9W
- Efficacy: 70 LPW
- Total Harmonic Distortion: ≤15 %

### Mechanical:

- Die-Cast Aluminum With White Powder Coat Finish
- Junction Box Included With Fixture
- Junction Box Thickness: 1-3/8"
- Cut-out Hole Diameter: 4-1/8"
- 24" DC cord from Driver Box to Fixture
- Operating Temperature: -4°F to 104°F
- Recessed Mounting
- Indoor or covered outdoor use only. Direct UV exposure may cause discoloration or material degradation within 1 to 3 years in high-UV environments, coastal, or high altitude areas
- 5-Year Warranty
- Suitable for Damp Location

### Lighting:


- Dimming: Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Total Lumens: 630LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi CCT (Selectable Switch on the Back of the Driver)
- Lens: 0.125" White Translucent Acrylic
- Can Rotate after Installation to Align
- Optics: White Translucent Acrylic
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 100°-110°
- Rated life: 50,000 hrs

### Applications:


- LED recessed trims have been designed to be a flexible lighting solution for new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications



## Photometrics: SSL4-MCT5-FR

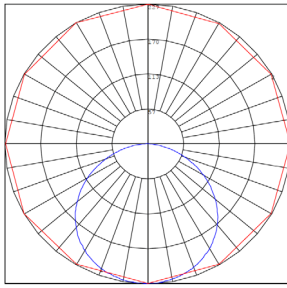

BUG Rating: B2-U1-G0

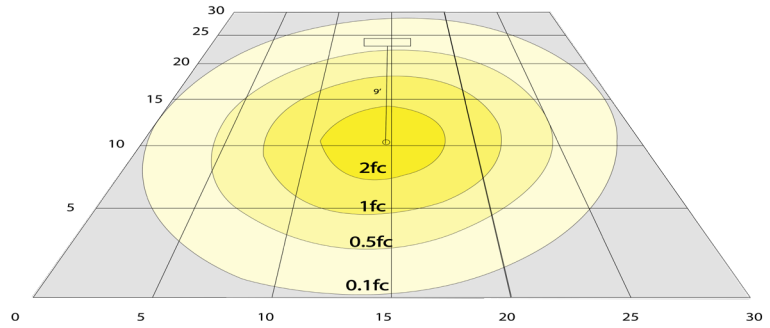

9W 5000K, Area 30'x 30' Mounting Height: 9'

## Other Views:



Front View



Junction box 1-1/4" thick included with fixtures

Back View

## Performance Table: SSL4-MCT5-FR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SSL4-MCT5-FR	9W	120V	630LM	2700K	B2-U1-G0	70
				3000K		
				3500K		
				4000K		
				5000K		

## Sample Ordering

**Model**    **Color Temp.**    **Fire Rated**

SSL4 - MCT5 - FR

### Accessories:

Blank = No Option For Accessories  
 RSL-EXT-10FT-MCT = 10 FT. EXTENSION CABLE FOR USE WITH ALL SLIM LIGHT  
 SSL6-RI = 6" Square Rough-in Plate, 26" Long  
 RSL-346-RIBH = 3", 4", 6" (ADJUSTABLE) ROUND GALVANIZED PLATE WITH BAR HANGERS

### Factory-Installed Option:

Blank = No Option For Accessories  
 OPT-EM-DL1EXT = EXTERNAL BATTERY BACKUP

### ACCESSORIES:



SSL6-RI  
6" Square Rough-in Plate, 26" Long

RSL-EXT-10FT-MCT  
10 Ft. Extension Cable For use with all Slim Light



SSL-346-RIBH  
3", 4", 6" (Adjustable) Square Galvanized plate with Bar Hangers

### FACTORY-INSTALLED OPTION:



OPT-EM-DL1EXT  
EXTERNAL BATTERY BACKUP



## Compatible Dimmer List:

MODEL NO.	BRAND
6631-1LT	LEVITON
MACL-153MLH-AL	LUTRON
TGCL-153PH-LA	LUTRON
DVW-603PGH-WH	LUTRON
CT-600PR-WH	LUTRON
LGCL-153PHL-IV	LUTRON
TGCL-153PH-LA	LUTRON
LSLV603PWV	LUTRON
6674-POW	LEVITON
DVCL-153P	LUTRON
MSCL-OP153P	LUTRON
CTCL-153P	LUTRON
MACL-153M	LUTRON
HCL453PTCCCV6	PASS & SEYMOUR
LSLV603PWV	PASS & SEYMOUR

