



Photometrics: SSLRB6-MCT5

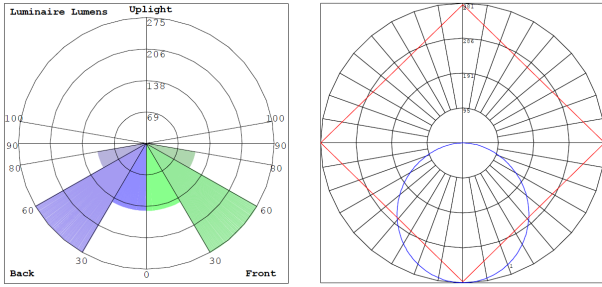

BUG Rating: B1-U1-G1

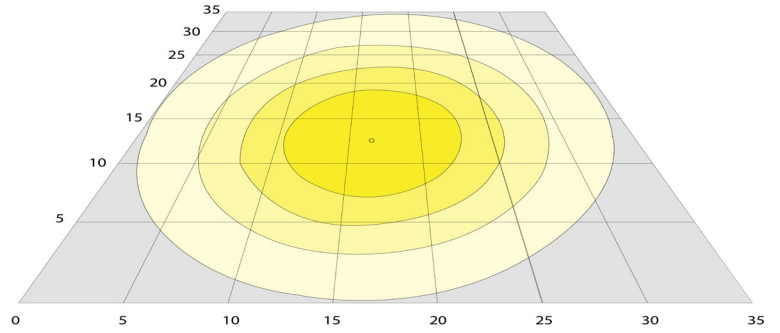

Area 35'x 35' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: SSLRB6-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SSLRB6-MCT5	15W	120V	1125LM	2700K 3000K 3500K 4000K 5000K	B1-U1-G1	75

Sample Ordering

Model Color Temp.

SSLRB6 - MCT5

Accessories:

Blank = No Option For Accessories

SSL6-RI = 6" Square Rough-in Plate, 26" Long

SSLRB6-TRM-BK = 6 INCH SQUARE TRIM FOR SSLRB4 BLACK


SSLRB6-TRM-BN = 6 INCH SQUARE TRIM FOR SSLRB4 BRUSHED NICKEL

SSLRB6-TRM-ORB = 6 INCH SQUARE TRIM FOR SSLRB4 OIL-RUBBED BRONZE


ACCESSORIES:



SSL6-RI
26" x 6"



SSLRB6-TRM-BK



SSLRB6-TRM-BN



SSLRB6-TRM-ORB

Example:

1. SSLRB6-MCT5

(FOR SSLRB6 15W MCT5 FIXTURE 120V)

2. SSLRB6-MCT5
SSL6-RI

(FOR SSLRB6 15W MCT5 FIXTURE 120V)
(6" Square Rough-in Plate, 26" Long)

