




## STL-150W-50K(-P) SLT-150W-50K-480V(-P)

### DIMENSIONS:

20.6"(L) x 10.8"(H) x 4.3"(D)

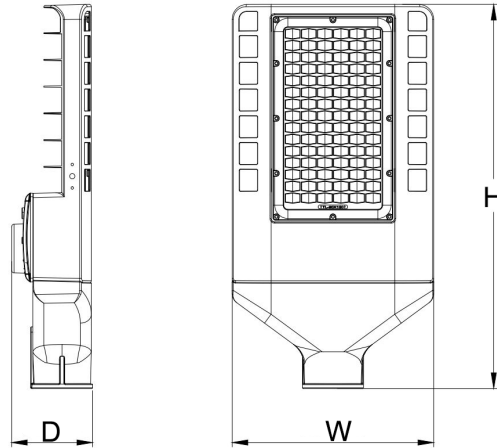

### LED STREET/ROADWAY LIGHTS

Ideal for general site lighting, street, roadway, alleys, loading docks, doorway, pathway and parking areas.

#### ELECTRICAL SPECIFICATIONS:

- Voltage: 100~277V & 277~480V /60Hz
- Wattage: 150 W
- Power factor: >0.90
- Efficacy: 115 LM/W

#### HOUSING SPECIFICATIONS:

- Die-Cast Aluminum
- Powder Coat Finish (Light Grey)
- Cord type: 40" SJTW 18/3 AWG cable
- With 2 brackets for 1.5" and 2.5" O.D. Poles
- Driver located in isolated compartment for improved Thermal management.
- Operating temperature: -40°F to 104°F
- Lifespan: 50,000 hr.

#### CERTIFICATIONS: UL, DLC



| MODEL                 | WATTS | VOLTAGE   | LUMENS  | COLOR TEMP |
|-----------------------|-------|-----------|---------|------------|
| STL-150W-50K(-P)      | 150W  | 100~277 V | 17250LM | 5000K      |
| SLT-150W-50K-480V(-P) | 150W  | 277~480 V | 17250LM | 5000K      |

#### LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Optional Nema Twist-lock Photocell (add "-p")
- Lens: Optical TYPE IV Lens (Other Lens options available for Job orders with Lead time)
- Total lumens: 6900 LM
- Color temperature: 5000K
- Color rendering index: >80

#### WARRANTY: 7 years

