


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

## DIMENSIONS:

19"(L) x 9.5"(H) x 5.25"(D)

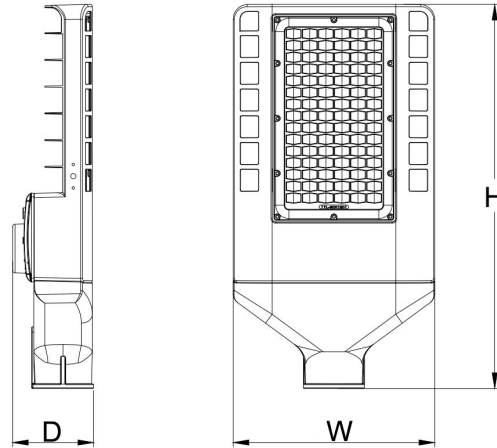

## STL-90W-50K(-P)

### LED STREET/ROADWAY LIGHTS

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.

#### ELECTRICAL SPECIFICATIONS:

- Voltage: 100~277V/60Hz
- Wattage: 90 W
- Power factor: >0.90
- Efficacy: 116.66 LM/W

#### HOUSING SPECIFICATIONS:

- Die-Cast Aluminum
- Powder Coat Finish (Light Grey)
- Cord type: 40" SJTW 18/3 AWG cable
- With 2 brackets for 1.5" and 2.5" O.D. Poles
- Driver located in isolated compartment for improved Thermal management.
- Operating temperature: -40°F to 104°F
- Lifespan: 50,000 hr.

#### CERTIFICATIONS: UL, DLC



#### LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Optional Nema Twist-lock Photocell (add "-p")
- Lens: Optical TYPE IV Lens (Other Lens options available for Job orders with Lead time)
- Total lumens: 6900 LM
- Color temperature: 5000K
- Color rendering index: >80

#### WARRANTY: 7 years

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
STL-90W-50K(-P)	90W	100~277 V	10500 LM	5000K

