




CLEAR



FROSTED

T8-4FT

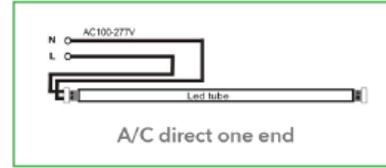


A/C direct one end

Installation Instructions

Powered from one end

(Retrofit Application)

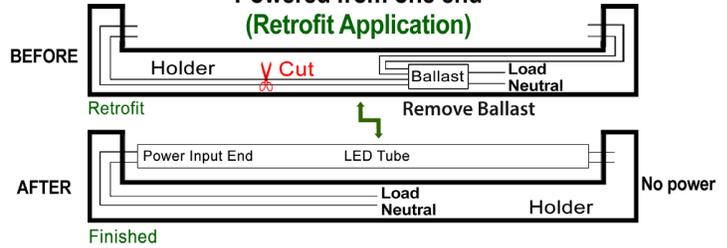

T8-4FT-18W-35K-D-F / T8-4FT-18W-40K-D-F T8-4FT-18W-50K-D-F / T8-4FT-18W-50K-D-C

4ft. T-8 LED Tube Lamps

Ideal for offices, retail stores, showrooms and residential applications. Especially suited for areas where accessing the fixture is challenging.
Rated for use in open fixtures only. Not for use in enclosed

ELECTRICAL SPECIFICATIONS:

- Voltage: 90~140V (Dimmable)

LIGHTING SPECIFICATIONS:

- Chip: 132 SMD2835
- Beam spread: 120°
- Base: fits standard T8 or T12 sockets (G-13)
- Color temperature: daylight (DL = 5000K), natural white (NW 4100K), warm white (WW = 3200K)
- Ambient operating temperature: -10°C to 30°C
- Requires no ballast. Existing ballast must be bypassed and one socket wired directly to line voltage
- Dimmable: Yes
- Fully dimmable: T8-4FT-18W-40K-D-F
T8-4FT-18W-50K-D-F
T8-4FT-18W-50K-D-C

- WARRANTY:**
- Five-year warranty
 - Rated life: 50,000 hours

MODEL NO.	WATT	LUMENS	VOLTAGE	COLOR TEMP	LENS
T8-4FT-18W-35K-D-F	18w	1800	90~140V	WW 3200K	Dimmable-F
T8-4FT-18W-40K-D-F	18w	1900	90~140V	NW 4000K	Dimmable-F
T8-4FT-18W-50K-D-F	18w	1950	90~140V	CW 5000K	Dimmable-F
T8-4FT-18W-50K-D-C	18w	1950	90~140V	CW 5000K	Dimmable-C

SPECIAL FEATURES:

- Special Order: Available in 3"6" and 8" lengths, frosted lens, or with dimmable driver.
- Use part number PXTEU-16-specified color.
- T-8 LED lamp operates on line voltage. Ballast must be disconnected and bypassed. One socket wired to line voltage
- Heat sink: 6063 extruded aluminum with heat dissipation ribs for superior thermal management
- 4ft LED tube available in 16-watt in a red, blue, green and yellow color in stock.

CERTIFICATIONS:

- UL-listed / DLC-rated (except T8-8FT-40W-50K-C and T8-8FT-40W-50K-F)




T8-4FT-18W-35K-D-F/T8-4FT-18W-40K-D-F T8-4FT-18W-50K-D-F/T8-4FT-18W-50K-D-C

4ft. T-8 LED Tube Lamps


Chromaticity Diagram— Sphere Spectroradiometer Method




LM79 T8-4FT-18W-50K-C

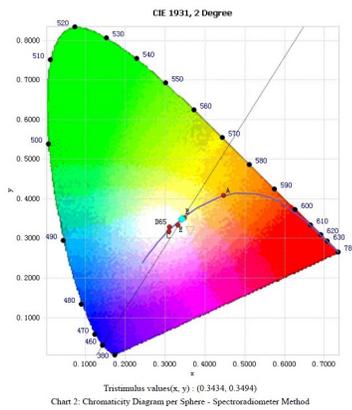

LM79 T8-4FT-18W-41K-C

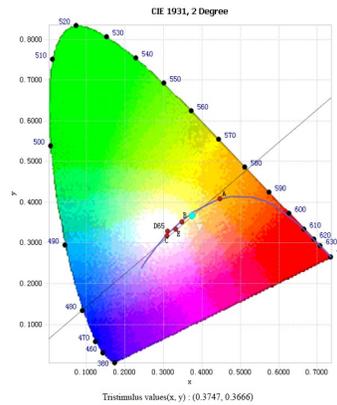

LM79 T8-4FT-22W-41K-F

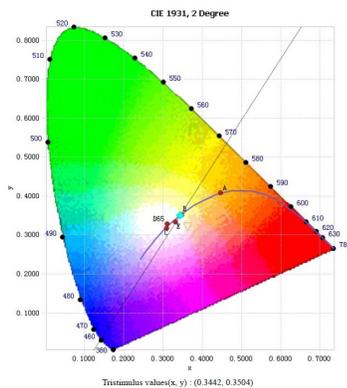

LM79 T8-4FT-18W-41K-F

