




## DIMENSIONS:


4' LONG, G-13 BASE

## Works 3 ways:


### 1) With existing electronic ballast

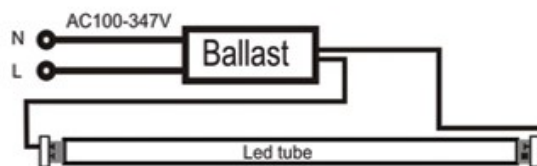

### 2) A/C direct one end

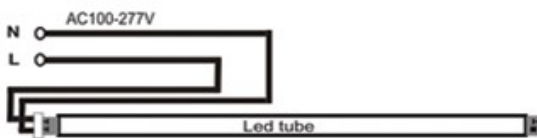

### 3) A/C direct two ends

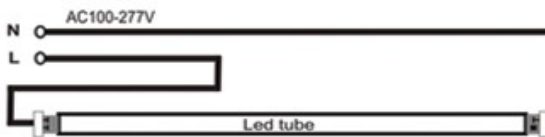

- T8-EZ3-4FT-18W-50K-C
- T8-EZ3-4FT-18W-50K-F
- T8-EZ3-4FT-18W-40K-C
- T8-EZ3-4FT-18W-40K-F
- T8-EZ3-4FT-18W-35K-C
- T8-EZ3-4FT-18W-30K-C
- T8-EZ3-4FT-18W-30K-F

## T8-EZ3-4FT-18W LED TUBE LAMPS

Ideal for offices, showrooms, refrigerators, cove lighting, etc. Avoid initial labor costs by replacing fluorescent tubes with this compatible LED tube. If fluorescent ballast fails, you do not need a new ballast.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz, 100-347V w/BALLAST
- Wattage: 18W
- Power factor: >0.9
- Efficacy: 118lm/W~125lm/W

### HOUSING SPECIFICATIONS:

- Operating temperature: -4°F~104°F
- Lifespan: 50000 Hrs.

### CERTIFICATIONS: UL, DLC



MODEL	WATTS	MATERIAL	LUMENS	COLOR TEMP
T8-EZ3-4FT-18W-50K-C	18W	CLEAR	2212 LM	5000K
T8-EZ3-4FT-18W-50K-F	18W	FROSTED	2212 LM	5000K
T8-EZ3-4FT-18W-40K-C	18W	CLEAR	2212 LM	4000K
T8-EZ3-4FT-18W-40K-F	18W	FROSTED	2212 LM	4000K
T8-EZ3-4FT-18W-35K-C	18W	CLEAR	2200 LM	3500K
T8-EZ3-4FT-18W-30K-C	18W	CLEAR	2100 LM	3000K
T8-EZ3-4FT-18W-30K-F	18W	FROSTED	2100 LM	3000K

### LIGHTING SPECIFICATIONS:

- Total lumens: 2100 LM, 2200 LM, and 2212 LM
- Color temperature: 3000K, 3500K, 4000K and 5000K
- Color rendering index: >80
- Beam angle: 120°

### WARRANTY: 5 years

