




**DIMENSIONS:**

4' LONG, G-13 BASE

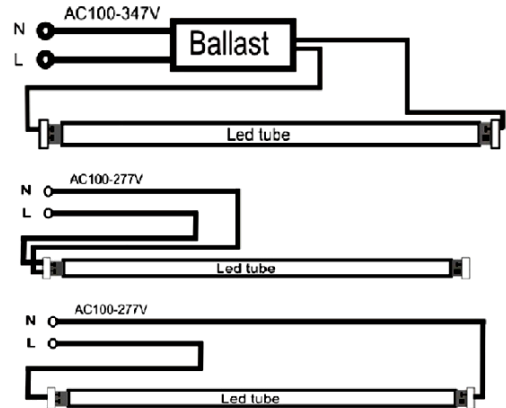

Works with A/C Direct (120-277V) using (one) end, (both) ends, or by using an electronic ballast.

- T8-EZ5-GS-4FT-18W-50K-C    T8-EZ5-GS-4FT-18W-35K-C
- T8-EZ5-GS-4FT-18W-50K-F    T8-EZ5-GS-4FT-18W-35K-F
- T8-EZ5-GS-4FT-18W-40K-C    T8-EZ5-GS-4FT-18W-30K-C
- T8-EZ5-GS-4FT-18W-40K-F    T8-EZ5-GS-4FT-18W-30K-F

**4FT. LED T8-EZ5 GLASS TUBE LAMPS**

Glass tube provides better transparency and thermal conductivity than plastic. Ideal for offices, showrooms, refrigerators, cove lighting.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120-277VAC 50/60Hz
- Wattage: 18W
- Power factor: >0.9
- Efficacy: 116LM/W

**HOUSING SPECIFICATIONS:**

- Operating temperature: -4°F~104°F
- Lifespan: 50000 Hrs.
- IP Rating: IP20

**CERTIFICATIONS:** UL, DLC



MODEL	WATTS	MATERIAL	LUMENS	COLOR TEMP
T8-EZ5-GS-4FT-18W-50K-C	18W	CLEAR	2100 LM	5000K
T8-EZ5-GS-4FT-18W-50K-F	18W	FROSTED	2100 LM	5000K
T8-EZ5-GS-4FT-18W-40K-C	18W	CLEAR	2100 LM	4000K
T8-EZ5-GS-4FT-18W-40K-F	18W	FROSTED	2100 LM	4000K
T8-EZ5-GS-4FT-18W-35K-C	18W	CLEAR	2100 LM	3500K
T8-EZ5-GS-4FT-18W-35K-F	18W	FROSTED	2100 LM	3500K
T8-EZ5-GS-4FT-18W-30K-C	18W	CLEAR	2100LM	3000K
T8-EZ5-GS-4FT-18W-30K-F	18W	FROSTED	2100 LM	3000K

**LIGHTING SPECIFICATIONS:**

- No UVA Output
- Base type: G13
- Total lumens: 2100LM
- Color temperature: 3000k/3500k/4000K/5000K
- Color rendering index: >80
- Beam angle: 180°

**WARRANTY:** 5 years

