




DIMENSIONS:

2' LONG, G-13 BASE

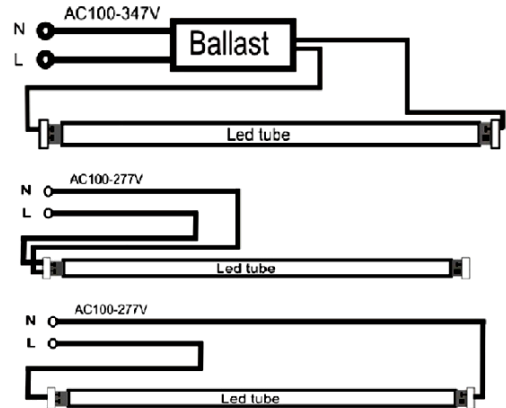

Works with A/C Direct (120-277V)
using (one) end, (both) ends,
or by using an electronic ballast.

- | | |
|------------------------|------------------------|
| T8-EZ5-GS-2FT-8W-50K-C | T8-EZ5-GS-2FT-8W-35K-C |
| T8-EZ5-GS-2FT-8W-50K-F | T8-EZ5-GS-2FT-8W-35K-F |
| T8-EZ5-GS-2FT-8W-40K-C | T8-EZ5-GS-2FT-8W-30K-C |
| T8-EZ5-GS-2FT-8W-40K-F | T8-EZ5-GS-2FT-8W-30K-F |

2FT. LED T8-EZ5 GLASS TUBE LAMPS

Glass tube provides better transparency and thermal conductivity than plastic. Ideal for offices, showrooms, refrigerators, cove lighting.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 8W
- Power factor: >0.9
- Efficacy: 125LM/W

HOUSING SPECIFICATIONS:

- Operating temperature: -4°F~104°F
- Lifespan: 50000 Hrs.
- IP Rating: IP20

CERTIFICATIONS: UL, DLC



MODEL	WATTS	MATERIAL	LUMENS	COLOR TEMP
T8-EZ5-GS-2FT-8W-50K-C	8W	CLEAR	1000LM	5000K
T8-EZ5-GS-2FT-8W-50K-F	8W	FROSTED	1000LM	5000K
T8-EZ5-GS-2FT-8W-40K-C	8W	CLEAR	1000LM	4000K
T8-EZ5-GS-2FT-8W-40K-F	8W	FROSTED	1000LM	4000K
T8-EZ5-GS-2FT-8W-35K-C	8W	CLEAR	1000LM	3500K
T8-EZ5-GS-2FT-8W-35K-F	8W	FROSTED	1000LM	3500K
T8-EZ5-GS-2FT-8W-30K-C	8W	CLEAR	1000LM	3000K
T8-EZ5-GS-2FT-8W-30K-F	8W	FROSTED	1000LM	3000K

LIGHTING SPECIFICATIONS:

- No UVA Output
- Base type: G13
- Total lumens: 1000LM
- Color temperature: 3000k/3500k/4000K/5000K
- Color rendering index: >80
- Beam angle: 180°

WARRANTY: 5 years

