

# T8 SERIES

COMMERCIAL INDOOR LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!


- T8-EZ6-GS-4FT-15W-30K-F
- T8-EZ6-GS-4FT-15W-35K-F
- T8-EZ6-GS-4FT-15W-40K-F
- T8-EZ6-GS-4FT-15W-50K-F

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

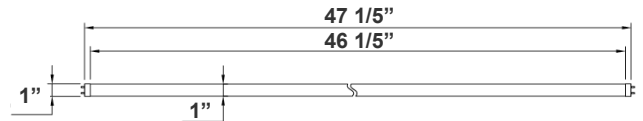

Crystal Glass T8 Tube switches from fluorescent tubes to LED, giving more cost efficiency by providing the same amount of lumen output with less energy consumption. The LED tube offers a soft and bright light distribution.

47 1/5"(L) X 1" (D)

## Features

- Type A + B (Dual UL)
- Type A: With Existing Ballast - UL No. E366061
- Type B: Ballast Override (AC Direct), Connect One End or Both Ends (Dual Function) - UL No. E342884
- 5-Year Warranty
- Glass Lens

## Technical Specifications

### Electrical:

- Voltage: 120-277V; 50/60Hz AC
- Power Factor: >0.90
- THD: <20%
- Wattage: 15W
- Efficacy: 120 LPW

### Mechanical:

- Base Type: G13
- Glass Tube: With Shatter-Proof Film
- Ambient Operating Temperature: -13°F to 113°F
- IP Rating: IP20 (Indoor)

### Lighting:

- Dimming: Non Dimmable
- Total Lumens: 1800LM
- Color Temperatures: 3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 120°
- Rated life: 50,000 hrs

### Applications:

- Direct Fit 4 T8 LED tubes do not burn out easily and provide bright and even lighting to schools, office spaces, retail stores and storage rooms.

### Other Models:



- 15W | 1800LM | T8-EZ6-GS-4FT-15W-30K-C
- 15W | 1800LM | T8-EZ6-GS-4FT-15W-35K-C
- 15W | 1800LM | T8-EZ6-GS-4FT-15W-40K-C
- 15W | 1800LM | T8-EZ6-GS-4FT-15W-50K-C




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com | www.westgatecontrols.co



## Photometrics: T8-EZ6-GS-4FT-15W

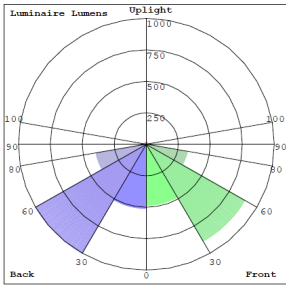

BUG Rating: B2-U2-G1

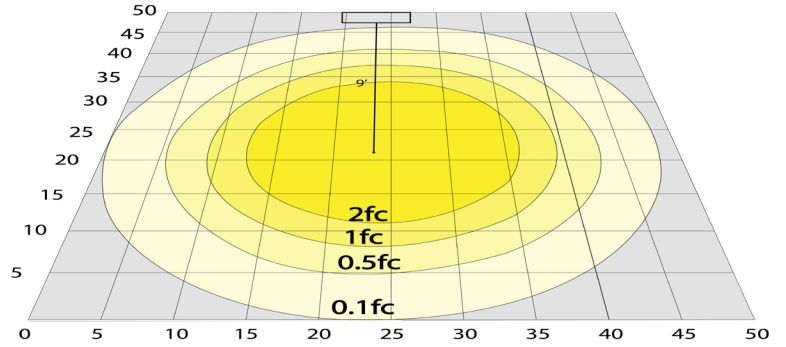


Area 50'x 50' Mounting Height: 9'

## Other Views:



Close-up View



Front View



Socket View

## Performance Table: T8-EZ6-GS-4FT-15W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
T8-EZ6-GS-4FT-15W-30K-F	15W	120-277V	1800LM	3000K	B2-U2-G1	120
T8-EZ6-GS-4FT-15W-35K-F	15W	120-277V	1800LM	3500K	B2-U2-G1	120
T8-EZ6-GS-4FT-15W-40K-F	15W	120-277V	1800LM	4000K	B2-U2-G1	120
T8-EZ6-GS-4FT-15W-50K-F	15W	120-277V	1800LM	5000K	B2-U2-G1	120

## Sample Ordering

Model Material Size Watt Color Temp. Lens Type

T8 - EZ6 - GS - 4FT - 15W - [ ] - F


30K = 3000K  
35K = 3500K  
40K = 4000K  
50K = 5000K

## Example:

1. T8-EZ6-GS-4FT-15W-30K-F

(FOR 15W 3000K T8 4FT TUBE LAMP 120-277V)

## WIRING DIAGRAM:

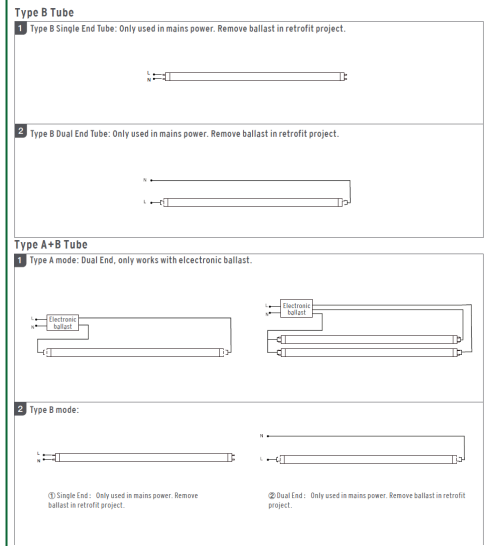

## Other Models: T8-EZ6-GS-4FT-15W-C (Clear Model)



Close-up View



Front View



Socket View