

T8 SERIES

COMMERCIAL INDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!


T8-EZ6-U2F-15W-50K-C
T8 U-Bend LED Tube (TypeA+B)

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

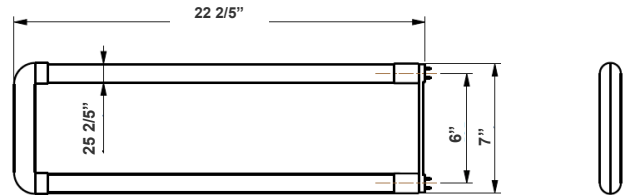

22 2/5"(L) X 7" (H)

Crystal Glass T8 Tube switches from fluorescent tubes to LED, giving more cost efficiency by providing the same amount of lumen output with less energy consumption. The LED tube offers a soft and bright light distribution.

Features

- Type A + B (Dual UL)
- Type A: With Existing Ballast - UL No. E366061
- Type B: Ballast Override (AC Direct), Connect One End or Both Ends (Dual Function) - UL No. E342884
- 5-Year Warranty
- Glass Lens

Technical Specifications

Electrical:

- Voltage: 120-277 V; 50/60Hz AC
- Power Factor: >0.90
- THD: <20%
- Wattage: 15W
- Efficacy: 140 LPW

Mechanical:

- Base Type: G13
- Glass tube: Better Transparency and Thermal Conductivity than Plastic
- Clear Glass
- Ambient Operating Temperature: -13°F to 113°F
- IP Rating: IP20 (Indoor)

Lighting:

- No Mercury And Virtually No UV Emission.
- Total Lumens: 2100LM
- Color Temperatures: 5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 120°
- Rated life: 50,000 Hrs

Applications:

- Crystal Glass T8 Tube switches from fluorescent tubes to LED, giving more cost efficiency by providing the same amount of lumen output with less energy consumption. The LED tube offers a soft and bright light distribution.

Other Models:



- 15W | 2000LM | T8-EZ6-U2F-15W-50K-F




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: T8-EZ6-U2F-15W-50K-C



BUG Rating: B1-U3-G1

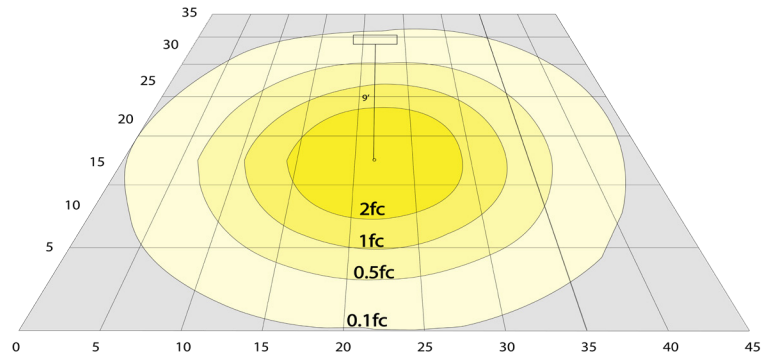

Area 35'x 45' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: T8-EZ6-U2F-15W-50K-C

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
T8 -U2F-U2F-15W-50K-C	15W	120-277V	2100LM	5000K	B1-U3-G1	140

Sample Ordering

Model	Material	Watt	Color Temp.	Lens Type	
T8	EZ6	U2F	15W	5000K	C


Example:

1. T8-EZ6-U2F-15W-50K-C


(FOR 15W 5000K T8 4FT TUBE LAMP 120-277V)

WIRING DIAGRAM:

TYPE A(Ballast compatible) - Assembly introduction:




TYPE B(AC directly, double end OR single end ballast bypass) - Assembly introduction:

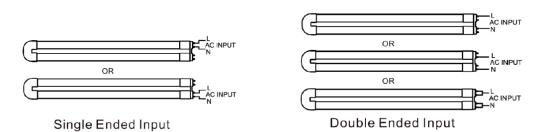

Other Models: T8-EZ6-U2F-15W-50K-F (Frosted Model)



Side View

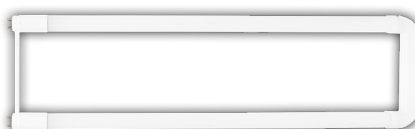

Front View



Back View