

BOL SERIES

Outdoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

TC-BOL-602-40-S-RGBW-BK
WG SMART APP COMPATIBLE RGBW,
SQUARE BOLLARD LONG LENS,


MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

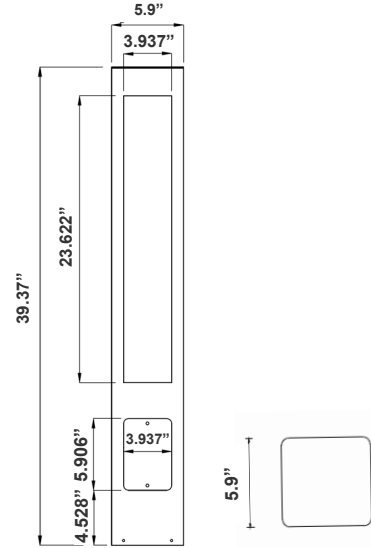

39.37"(H) x 5.9"(W) x 5.9"(D)

Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

Features

- Corrosion Resistant Aluminum for Exterior
- Samsung 2835 LED Chips
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V AC
- Wattage: 34W
- Power Factor: >0.9

Lighting:

- Color Temperatures: RGBW
- Color Rendering Index: CRI ≥ 80
- Beam Angle : 270°
- Lifespan: 70000 Hours

Mechanical:

- Corrosion Resistant Aluminum for Exterior
- Mounting Accessories & Anchor Bolts Included (7-1/2" long)
- Operating Temperature: -40°F to 113°F
- 7 Years Warranty
- IP Rating: IP65, Wet Locations

Applications:

- Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-20230517

Photometrics: TC-BOL-602-40-S-RGBW-BK

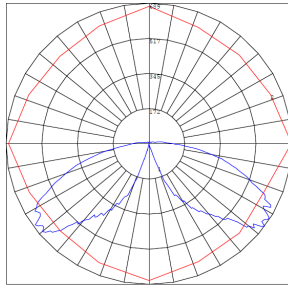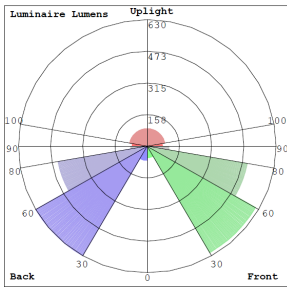

BUD Rating: B1-U3-G2

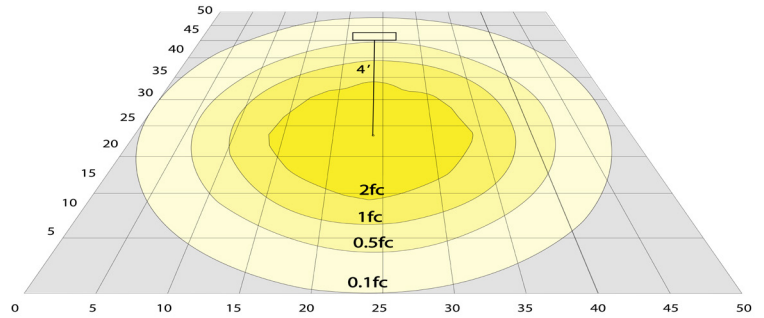

Area 75'x 65' Mounting Height: 4'

Other Views:

Performance Table: TC-BOL-602-40-S-RGBW-BK

MODEL NO.	Wattage	Voltage	Color Temp.	BUG Rating	LPW
TC-BOL-602-40-S-RGBW-BK	34W	120~277V	RGBW	B1-U3-G2	55

Sample Ordering

Model **Style** **Size** **Shape** **Color Temp.** **Housing**
 - - - - -

BK= BLACK
GY= GRAY


Accessories:

Blank = No Option For Accessories
 BOL-608-ABK = Bollard Round Replacement Anchor


Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-OD1INT = Emergency Backup Internal Battery, Back Box
 OPT-CRL-95(BK/GR/SR/WH) = Paint
 OPT-SEN-WMC = Microwave Bi-Level Sensor

ACCESSORIES:



BOL-602-ABK

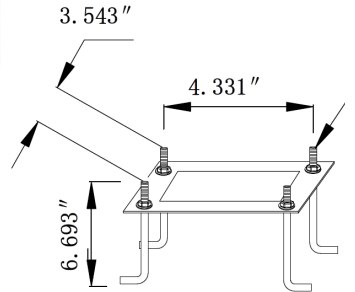

BOL-628-ABK
 6.693"(H) X 4.331"(W) X 3.543"(D)

FACTORY-INSTALLED OPTION:




OPT-EM-OD1INT
 INTERNAL BATTERY



OPT-SEN-WMC
 MICROWAVE BI-LEVEL SENSOR



OPT-PC-B
 FOR 120V-277V PHOTOCELL

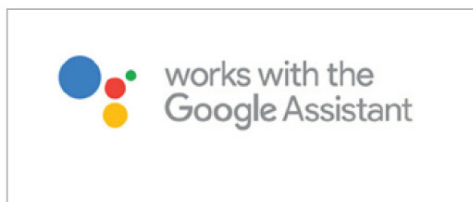

- For Setting Up The Light(s), Initial Internet Connection or Mobile Data Is Required.
- After the Initial Setup, Internet Connection is not Necessary Anymore. The lights Can Be Controlled with The Mobile App on The Phone or Tablet. Features Such as Dimming, Changing Colors, Lights Scenes, etc.
- Scheduling Feature Requires Internet Connection.
- Bluetooth Devices Need a Gateway (Sold Separately) In Order to Connect to WiFi Network (Internet)




COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:



Hammer:

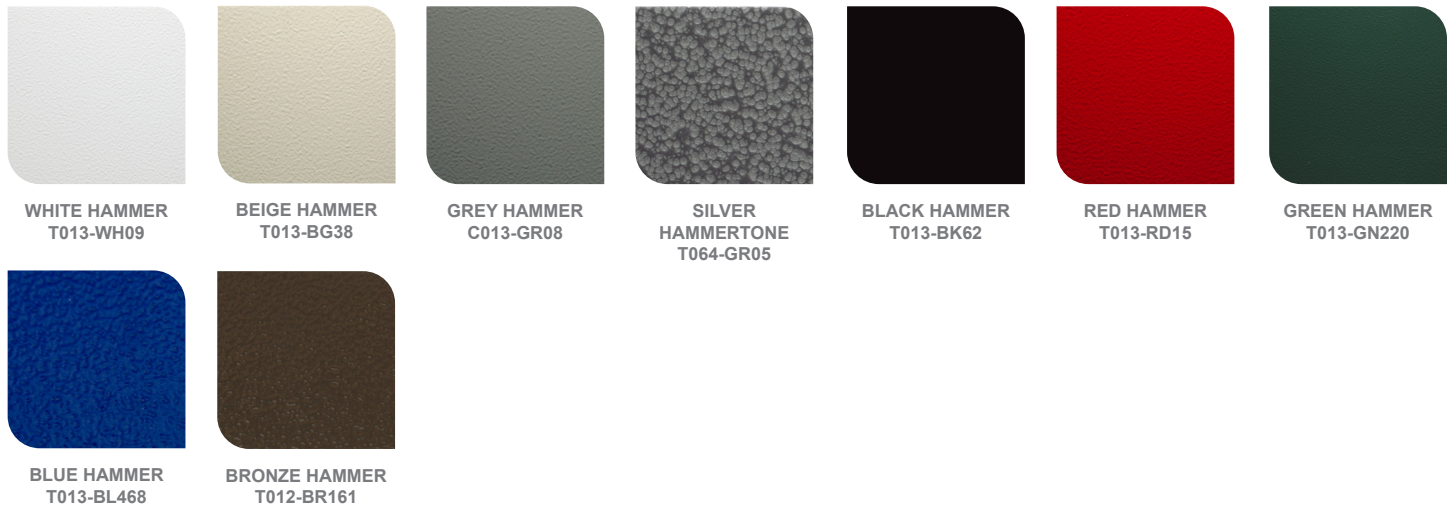

Texture:



Vein:

