

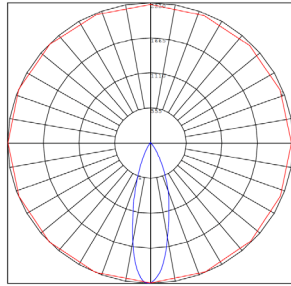


Photometrics: TC-WW-36W-RGBW-BT-BK

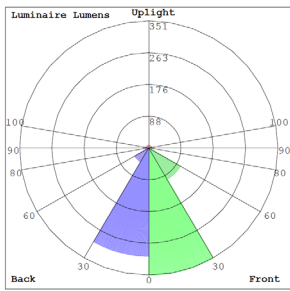

BUG Rating: B1-U1-G0

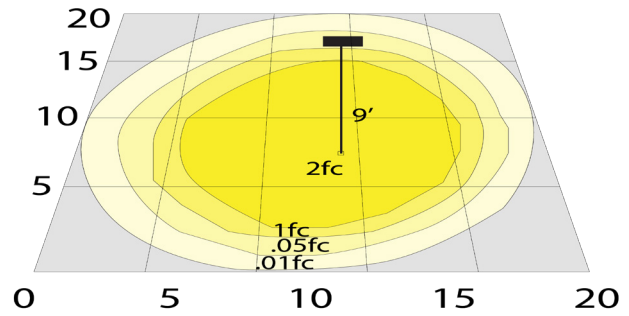

36W White, Area 20'x 20' Mounting Height: 9'


Other Views:



Side View



Front View

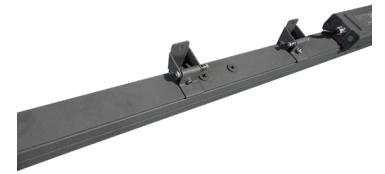

Back View

Performance Table: TC-WW-36W-RGBW-BT-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
TC-WW-36W-RGBW-BT-BK	36W	120-277V	930LM(Single White) 1300LM(Maximum Power)	RGBW	B1-U1-G0	36

Sample Ordering

- - - - -


Accessories:

Blank = No Option For Accessories
 DMX-WW-SH2 = HALF GLARE SHIELD FOR TC-WW-36W/72W & DMX-WW-36W

ACCESSORIES:



DMX-WW-SH2
 Half Glare Shield for
 TC-LIN-36W/72W &
 DMX-WW-36W

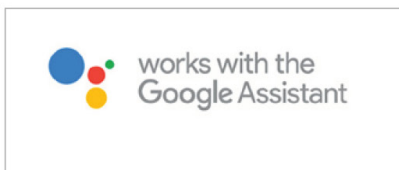

- For Setting Up The Light(s), Initial Internet Connection or Mobile Data Is Required.
- After the Initial Setup, Internet Connection is not Necessary Anymore. The lights Can Be Controlled with The Mobile App on The Phone or Tablet. Features Such as Dimming, Changing Colors, Lights Scenes, etc.
- Scheduling Feature Requires Internet Connection.
- Bluetooth Devices Need a Gateway (Sold Separately) In Order to Connect to WiFi Network (Internet)

