




**TGLK-2X4-MCTP**  
GEN 2 FRAME LIGHT KIT 4-PIECE VER. FOR EASY HANDLING

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)

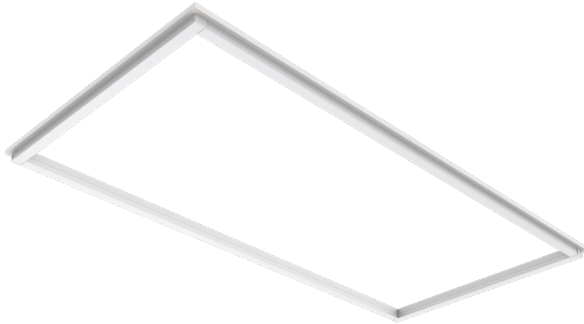

The LED Frame Light luminaire is a new design that creates innovative and outstanding lighting performance available to replace the 2x2 LED panel. It has a modern design and is easy to install. Ideal for new construction and remodel/replacement of fluorescent troffers or LED panels in commercial office spaces, schools, healthcare facilities, and retail merchandising areas. Compact ultra-thin appearance, simple installation, and outstanding performance. Assembling type in an individual package, easy to take away.

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

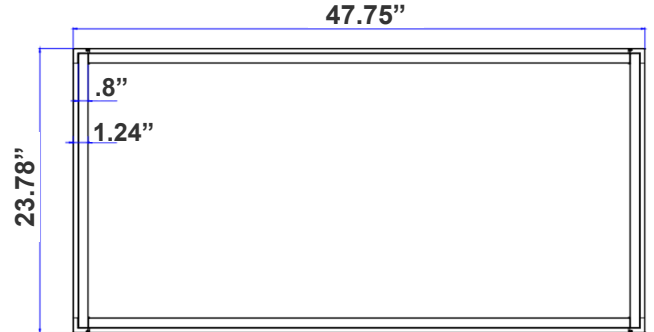

23.78"(H) x 47.75"(W) x 2.12"(D)

## Features

- White Finish
- Multi Color Temperature & Multi Power (Selectable Switch in Driver box)
- 5-Year Warranty
- High Quality LED Chips Provide High Efficiency, Heat Dissipation, Stability, and Lumen Maintenance

## Technical Specifications

### Electrical:

- Voltage: 120-277V
- Power Factor: >0.92
- Wattage: 25W/35W/45W
- Efficacy: 110LPW

### Mechanical:

- Extruded Aluminum with White Painting
- Surge Protector
- Maximum Ambient Temperature: -22°F to +104°F
- Rated life: 50,000 hrs
- Driver/Junction Box is Separate and Connects to the Fixture with a 3Ft. Dongle.
- Driver/Junction Box Installs On Adjacent Grid, On Top, Using Your Choice Of T-bar Bracket or Westgate T-bar Bracket Model (ELB-TBAR1)
- IP20 indoor use only

### Lighting:



- Performance Lens Assembly Delivers Unique Beam Angles and Reduces Glare
- Dimmable: 120-277V 0~10V Driver for Continuous Dimming
- Total Lumens: 4950LM Max.
- Driver Disconnect Provided Where Required to Comply with US and Canadian codes
- Color Temperatures: 3500K/4000K/5000K
- Multi CCT & Multi Power (Selectable Switch in Driver Box)
- Color Rendering Index: CRI ≥ 80

### Applications:


- Retail, Schools, Offices, Healthcare, Conference rooms, Hospitality, Corridors, Reception areas, Foyer Library




## Photometrics: TGLK-2X4-MCTP



BUG Rating: B2-U4-G2

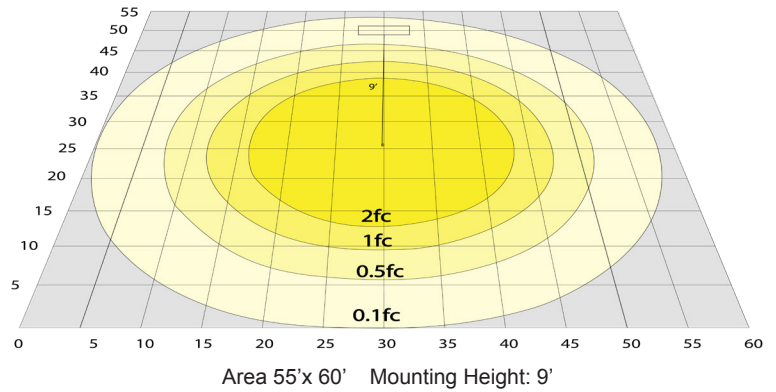


## Other Views:

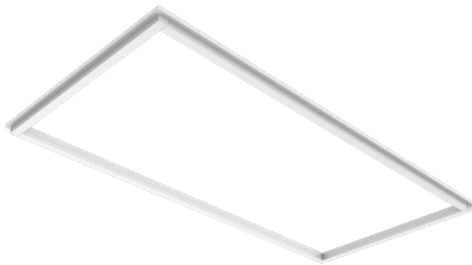

Side View



Front View

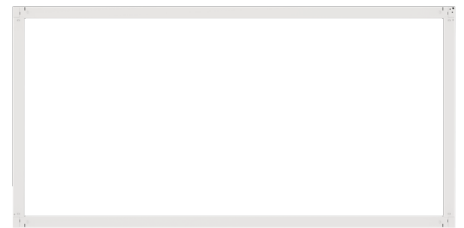

Back View

## Performance Table: TGLK-2X4-MCTP

MODEL NO.	Wattage	Lumens	LPW	Color Temp.	Voltage	BUG Rating
TGLK-2X4-MCTP	25W	2750LM	110	3500K	120-277V	B1-U3-G1
	35W	3850LM		4000K		
	45W	4950LM		5000K		

## Sample Ordering

Model Size CCT & Power

TGLK - 2X4 - MCTP

## Factory-Installed Option:

Blank = No Option For Accessories  
 OPT-EM-TGLK = Installed on a T-Bar Bracket to Clip on Top the T-Bar Grid  
 TBAR1EM = Driver  
 OPT-FWH-63 = 6FT 3-Wire Whip  
 OPT-FWH-65 = 6FT 5-Wire Whip  
 OPT-FWH-66 = 6FT 6-Wire Whip

## FACTORY-INSTALLED OPTION:



**OPT-EM-TGLK**  
 Installed on a T-Bar Bracket  
 to Clip on Top the T-Bar Grid



**OPT-FWH-63**  
**OPT-FWH-65**  
**OPT-FWH-66**  
 6FT 3/5/6 Wire Whip

