




**DIMENSION:**

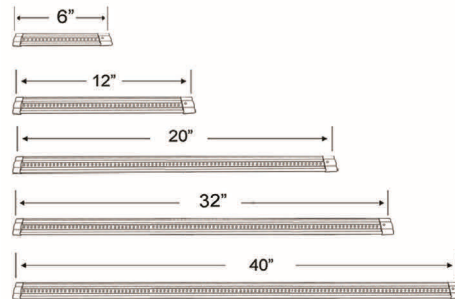

1-1/4" width x 1/4" height x Length

**Accessories included:**



**UCCONCABLE**  
36" Connector cable



**UCPLASCONN**  
In-line connector



**UCMCLIPS, UCSCREWS**  
Mounting clips & screws (2each)



For Hardwire Applications

**UC JUNCTION**

Accepts 18-22GA wire

**UCW6W UCW6WW UCW12W UCW12WW  
UCW20W UCW20WW UCW32W  
UCW32WW UCW40WW UCW40W**

**12-Volt LED Undercabinet**

Very low profile, easy to install, cool to the touch  
High brightness with excellent color rendition and years of maintenance free operation  
Wide selection of mounting hardware, accessories and LED drivers

**ELECTRICAL SPECIFICATIONS:**

- Highly efficient SMD 3528 chip technology
- Integral switch, push on - push off
- Working voltage: 24V DC - (driver required)
- Plug in electronic or hard wired magnetic drivers available

**MOUNTING:**

- Mounting hardware and coupler included
- Polycarbonate end caps with universal feed thru mono-pin receptacle

**WARRANTY:**

- Five-year warranty

**LIGHTING SPECIFICATIONS:**

- Color temperatures: warm white (3000K), cool white (6000K)
- Suitable for interior applications only
- Ambient temperature rating: -20°C (4°F) to +40°C (104°F)
- Max continuous run:: 24w (5")
- Dimmable using magnetic low voltage transformer:
  1. Hardwire application will require "magnetic low voltage dimmable driver DC" For WestGate UCM Series-use compatible "magnetic low voltage wall dimmer"
  2. The touch dimmer or the "in line dimmer" can only be used with the in line transformer

**HOUSING SPECIFICATIONS:**

- Ultra-low profile—only 1/4" deep
- Extruded aluminum housing with white powder coat finish
- Smooth white acrylic lens (.125" thickness). No lamp imaging

**CERTIFICATIONS:**

- UL-listed



JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

**UCW6W UCW6WW UCW12W UCW12WW  
 UCW20W UCW20WW UCW32W  
 UCW32WW UCW40WW UCW40W**

**12-Volt LED Undercabinet**

**ORDER INFORMATION:**



MODEL NO	LENGTH	WATTS	LUMENS	LED QTY	COLOR TEMP
UCW6WW	6"	2W	140	24	WW 3000K
UCW6W	6"	2W	168	24	CW 6000K
UCW12WW	12"	3W	250	42	WW 3000K
UCW12W	12"	3W	280	42	CW 6000K
UCW20WW	20"	5W	420	72	WW 3000K
UCW20W	20"	5W	462	72	CW 6000K
UCW32WW	32"	8W	590	96	WW 3000K
UCW32W	32"	8W	640	96	CW 6000K
UCW40WW	40"	11W	820	144	WW 3000K
UCW40W	40"	11W	880	144	CW 6000K

