


DIMENSIONS:

19.26" (D) x 7.22" (H)



Lens View

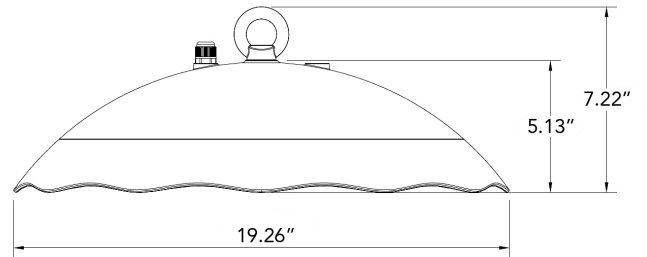

UFHB-150W-50K

LED FOOD SERVICE & LABORATORY HIGH BAY

Ideal for general site lighting, food services, laboratories, loading docks, doorway, parking area

ELECTRICAL SPECIFICATIONS:

- Voltage: 100-277VAC, 60Hz
- Wattage: 150W
- Power factor: >0.9
- Efficacy: 135LM/W
- THD: <20%

HOUSING SPECIFICATIONS:

- Housing: ACD12 aluminum heat sink, Grey finish (Chain not included)
- Aluminum LED Board: High conductive, waterproof, aging resistant, salt mist resistance, long-life
- Cord type: 6' SJTW 18/3 AWG cable
- Operating temperature: -4°F~122°F
- IP rating: IP66, Suitable for wet Locations

CERTIFICATIONS: UL,DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
UFHB-150W-50K	150W	100~277V AC	20250LM	5000K

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED type: LumiLEDs
- Lens: Fresnel Lens
- Total lumens: 20250LM
- Color temperature: 5000K
- Color rendering index: >80
- Beam angle: 90°

WARRANTY: 5 years

