


DIMENSIONS:

19.26" (D) x 7.22" (H)



Lens View

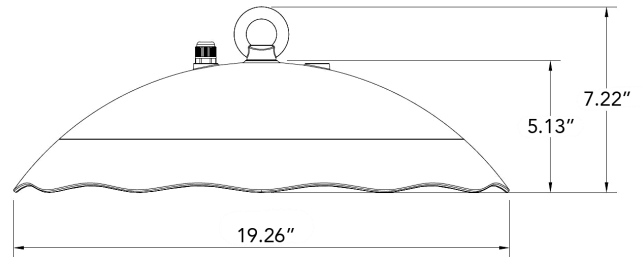

UFHB-200W-50K

LED FOOD SERVICE & LABORATORY HIGH BAY

Ideal for general site lighting, food services, laboratories, loading docks, doorway, parking area

ELECTRICAL SPECIFICATIONS:

- Voltage: 100-277VAC, 60Hz
- Wattage: 200W
- Power factor: >0.9
- Efficacy: 135LM/W
- THD: <20%

HOUSING SPECIFICATIONS:

- Housing: ACD12 aluminum heat sink, Grey finish (Chain not included)
- Aluminum LED Board: High conductive, waterproof, aging resistant, salt mist resistance, long-life
- Cord type: 6' SJTW 18/3 AWG cable
- Operating temperature: -4°F~122°F
- IP rating: IP66, Suitable for wet Locations

CERTIFICATIONS: UL,DLC



| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|---------------|-------|-------------|---------|------------|
| UFHB-200W-50K | 200W | 100~277V AC | 27000LM | 5000K |

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED type: LumiLEDs
- Lens: Fresnel Lens
- Total lumens: 27000LM
- Color temperature: 5000K
- Color rendering index: >80
- Beam angle: 90°

WARRANTY: 5 years

