


DIMENSIONS:

Ø13"(OD) x 7.4"(H)

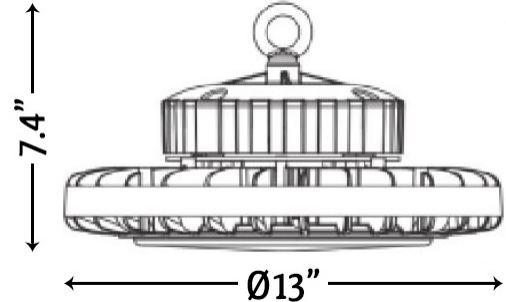

UHB-100-CW UHB-100-NW

LED UFO HIGH BAY FIXTURES

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 100W
- Other wattages: 150W, 300W, 360W
- Power factor: >0.9
- Efficacy: 120LM/W

HOUSING SPECIFICATIONS:

- ACD12 aluminum heat sink, SUS black plate
- Outdoor powder coat finish (Black)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- Prismatic PC lens cover
- Human body induction function (adapter sold separately)

CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
UHB-100-CW	100W	120~277V AC	11500 LM	5000K
UHB-100-NW	100W	120~277V AC	11500 LM	4000K



MODEL	DESCRIPTION
UHB-SMB-100	OPTIONAL SURFACE MOUNT BRACKET FOR 100W & 150W FIXTURES

LIGHTING SPECIFICATIONS:

- LED type/brand: Lumileds
- Total lumens: 11500LM
- Color temperature: 4000K / 5000K
- Color rendering index: >82
- Beam angle: 110°

WARRANTY: 5 years



UHB-100-CW UHB-100-NW

LED UFO HIGH BAY FIXTURES


CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
UHB-100-CW	100W	120~277V AC	11500 LM	5000K
UHB-100-NW	100W	120~277V AC	11500 LM	4000K

PHOTOMETRICS:




Spectral Power Distribution & Chromaticity Diagram

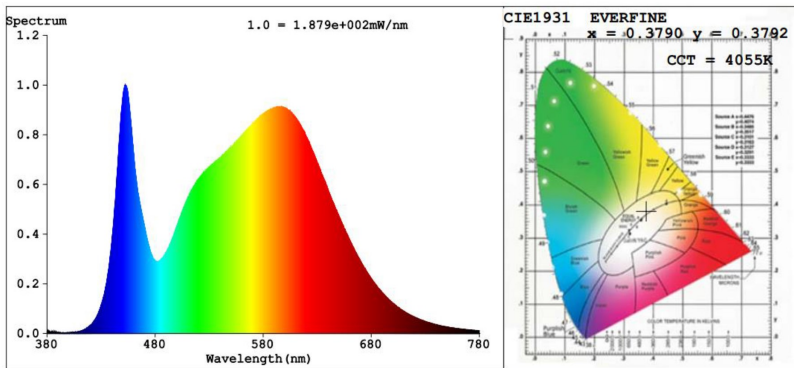

Illuminance at a Distance

	Center Beam fc	Beam Width	
17.0ft	15.40 fc	46.9 ft	47.2 ft
34.0ft	3.85 fc	93.8 ft	94.4 ft
51.0ft	1.71 fc	140.6 ft	141.6 ft
68.0ft	0.96 fc	187.5 ft	188.8 ft
85.0ft	0.62 fc	234.4 ft	236.0 ft
102.0ft	0.43 fc	281.3 ft	283.2 ft

■ Vert. Spread: 108.1°
■ Horiz. Spread: 108.5°

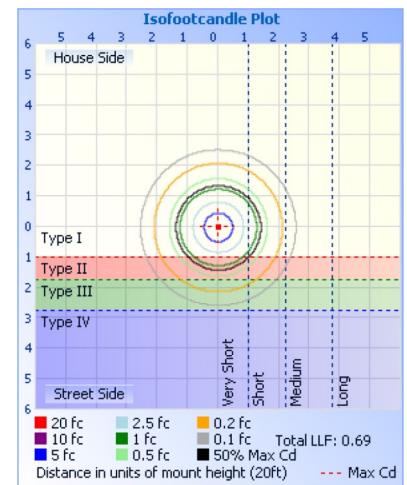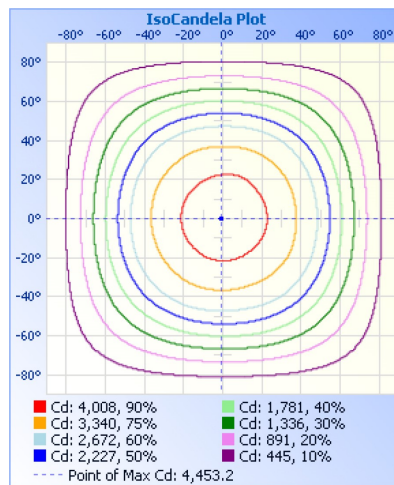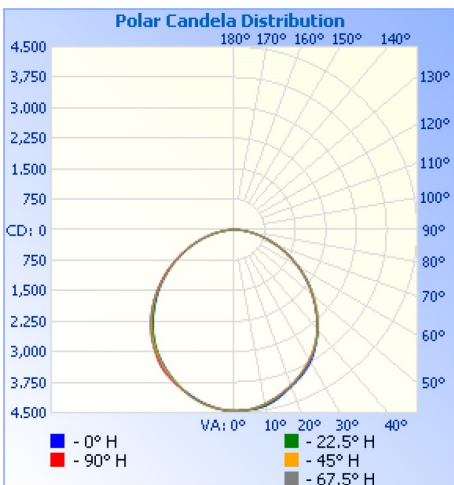

Rev. 2017-06-12

