




DIMENSIONS:

Ø16"(OD) x 10"(H)

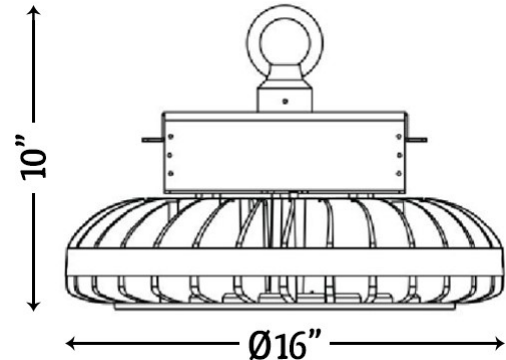

UHB-300-CW UHB-300-NW

LED UFO HIGH BAY FIXTURES

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 300W
- Other wattages: 100W, 150W, 360W
- Power factor: >0.9
- Efficacy: 125LM/W

HOUSING SPECIFICATIONS:

- ACD12 aluminum heat sink, SUS black plate
- Outdoor powder coat finish (Black)
- Operating temperature: -4°F ~ 122°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- Prismatic PC lens cover
- Human body induction function (adapter sold separately)

CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
UHB-300-CW	300W	120~277V AC	36000 LM	5000K
UHB-300-NW	300W	120~277V AC	36000 LM	4000K



MODEL	DESCRIPTION
UHB-SMB-300	OPTIONAL SURFACE MOUNT BRACKET FOR 300W & 360W FIXTURES

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V Dimming
- LED type/brand: LumiLEDs
- Total lumens: 36000LM
- Color temperature: 4000K / 5000K
- Color rendering index: >80
- Beam angle: 90°

WARRANTY: 5 years



UHB-300-CW

UHB-300-NW


LED UFO HIGH BAY FIXTURES

CERTIFICATIONS: UL, DLC



PHOTOMETRICS:

Spectral Power Distribution & Chromaticity Diagram

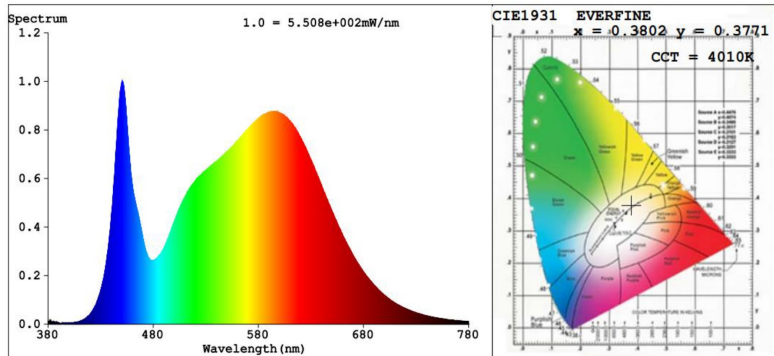

	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.0ft	65.1 fc	35.2 ft 35.3 ft
34.0ft	16.3 fc	70.4 ft 70.6 ft
51.0ft	7.2 fc	105.6 ft 105.9 ft
68.0ft	4.1 fc	140.8 ft 141.2 ft
85.0ft	2.6 fc	176.0 ft 176.5 ft
102.0ft	1.8 fc	211.1 ft 211.8 ft

■ Vert. Spread: 92.0°
■ Horiz. Spread: 92.1°

