




DIMENSIONS:

Ø14"(OD) x 5-1/2"(H)

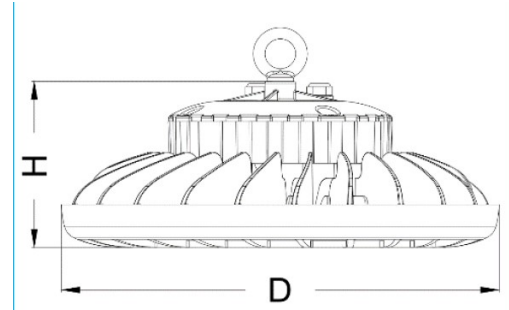

UHB2-150-CW-480V

LED UFO HIGH BAY FIXTURES (SERIES 2)

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.

ELECTRICAL SPECIFICATIONS:

- Voltage: 480V 50/60Hz
- Wattage: 150W
- Other wattages: 220W
- Power factor: >0.9
- Efficacy: 130LM/W

HOUSING SPECIFICATIONS:

- ACD12 aluminum heat sink, SUS black plate
- Outdoor powder coat finish (Black)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- Lens: High-transmittance PC, anti-UV & fire-resistant
- Human body induction function (adapter sold separately)

CERTIFICATIONS: UL, DLC



LIGHTING SPECIFICATIONS:

- LED type/brand: LumiLEDs
- Total lumens: 19600LM
- Color temperature: 5000K
- Color rendering index: >82
- Beam angle: 110°

WARRANTY: 5 years



UHB2-150-CW-480V

LED UFO


MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
UHB2-150-CW-480V	150W	480V	19600 LM	5000K

CERTIFICATIONS: UL, DLC



PHOTOMETRICS:

Spectral Power Distribution & Chromaticity Diagram

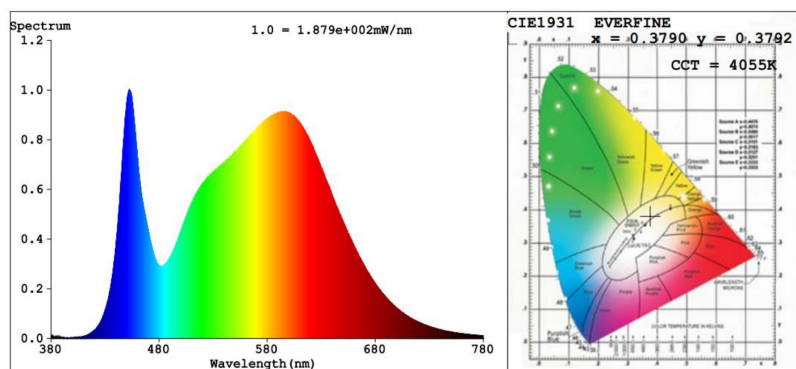

ILLUMINANCE at a Distance

	Center Beam fc	Beam Width
17.0ft	15.40 fc	46.9 ft 47.2 ft
34.0ft	3.85 fc	93.8 ft 94.4 ft
51.0ft	1.71 fc	140.6 ft 141.6 ft
68.0ft	0.96 fc	187.5 ft 188.8 ft
85.0ft	0.62 fc	234.4 ft 236.0 ft
102.0ft	0.43 fc	281.3 ft 283.2 ft

■ Vert. Spread: 108.1°
■ Horiz. Spread: 108.5°

