




DIMENSIONS:

Ø14" (OD) x 5.5" (H)

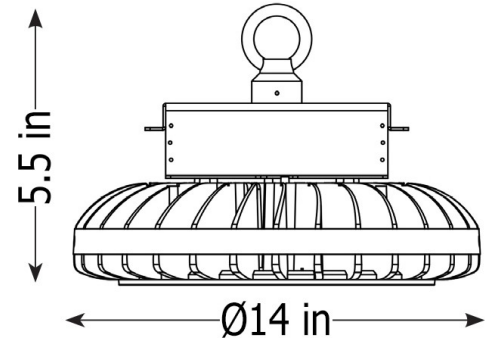

UHB2-220-CW-480V

LED UFO HIGH BAY FIXTURES

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.

ELECTRICAL SPECIFICATIONS:

- Voltage: 480V 50/60Hz
- Wattage: 220W
- Other wattages: 100W, 150W, 300W, 360W
- Power factor: >0.9
- Efficacy: 120LM/W

HOUSING SPECIFICATIONS:

- ACD12 aluminum heat sink, SUS black plate
- Outdoor powder coat finish (Black)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- High-transmittance, anti-UV and fire resistant PC lens

CERTIFICATIONS: UL, DLC



LIGHTING SPECIFICATIONS:

- LED type/brand: SMD 3030/ LEDs
- Total lumens: 27000LM
- Color temperature: 4000K / 5000K
- Color rendering index: >80
- Beam angle: 90°

WARRANTY: 5 years

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
UHB2-220-CW-480V	220W	480V	27000 LM	5000K



UHB2-220-CW-480V


LED UFO HIGH BAY FIXTURES

CERTIFICATIONS: UL, DLC



PHOTOMETRICS:

Spectral Power Distribution & Chromaticity Diagram

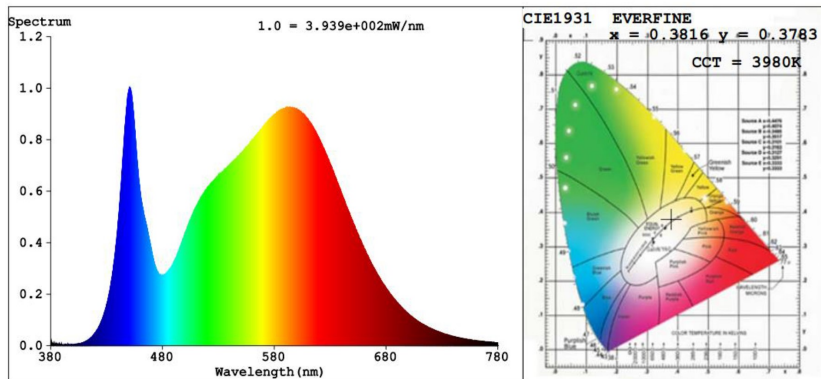

Illuminance at a Distance			
	Center Beam fc	Beam Width	
17.0ft	43.2 fc	35.8 ft	35.5 ft
34.0ft	10.8 fc	71.5 ft	70.9 ft
51.0ft	4.8 fc	107.3 ft	106.4 ft
68.0ft	2.7 fc	143.1 ft	141.8 ft
85.0ft	1.7 fc	178.8 ft	177.3 ft
102.0ft	1.2 fc	214.6 ft	212.7 ft
Vert. Spread: 92.9° Horiz. Spread: 92.4°			

