

UHXMAX SERIES INDUSTRIAL LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

UHXMAX-200-300W-MCTP-SR

MAX-FEATURE UFO-POWER & CCT&BEAM ADJUSTABLE SENSOR READY

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name: _____


Project Name: _____

Note: _____

Type: _____



Avail. Finishes:

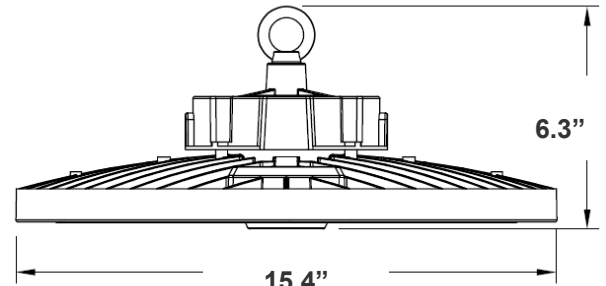

6.3"(H) X 15.4"(W)

In a aluminium shell designed for heat dissipation, UHX is IP65 water resistant rated and ideal for general site lighting, alleys, loading docks, doorways, pathways, parking areas, warehouses and storage buildings.

Features

- Waterproof design, suitable for wet locations
- ADC12 Aluminum Heat Sink, Outdoor Powder Coating Finish
- Optical Lens: PC Materials High Light Transmittance, Anti-UV, Fire-Resistant
- Multi Color Temperature & Multi Power (Selectable Switch Located On The Driver Housing)

Technical Specifications

Electrical:

- Input Wattage: 200W/240W/ 300W
- Input Voltage: 120-277V 50/60Hz
- Power Factor: >0.9
- THD: <20%
- Efficacy: 140 LPW

Mechanical:

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating Finish
- Sensor-Ready: Single Audio-Jack Socket Pre-Installed. See Motion Sensor Accessories
- Optical Lens: PC Materials High Light Transmittance, Anti-UV, Fire-Resistant
- 6' SJTW 18,3 AWG Power Cable
- 6' SJTW Dimming Cable
- LED PCB Board: High Conductive, Waterproof, Aging Resistance, salt mist Resistance, Ensure the Safety and Long Lifespan
- Operating temperature: -40°F to 122°F
- IP rating: IP65, Wet Locations
- 5-Year Warranty

Lighting:

- Dimming: 0~10V
- Total Lumens: 42000LM
- Multi Color Temperature & Multi Power (Selectable Switch Located On The Driver Housing)
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering index: > 80
- Beam Angle: 90°
- Lifespan: 50,000 Hrs

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway, parking areas, warehouses and storage buildings.




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-12202024

Photometrics: UHXMAX-200-300W-MCTP-SR

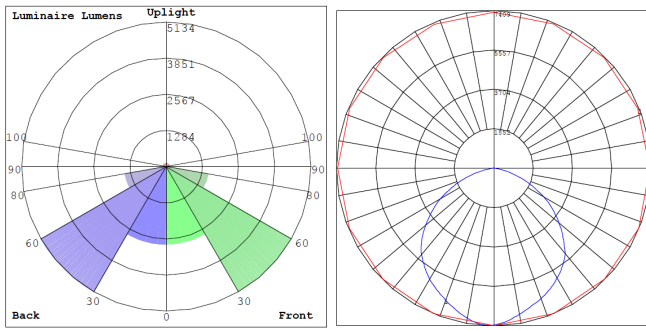

BUG Rating: B4-U3-G1

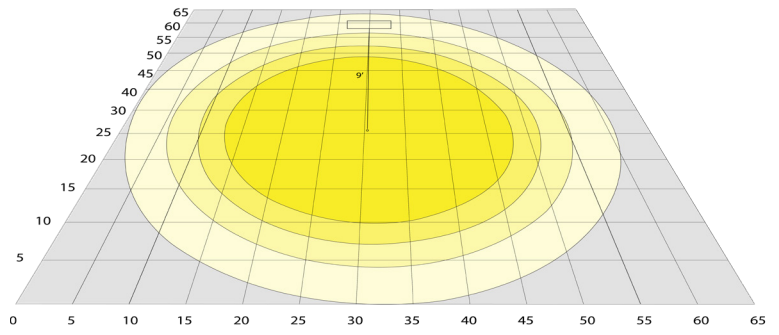

Area 65'x 65' Mounting Height: 9'

Other Views:



Side View



Top View



Bottom View

Performance Table: UHXMAX-200-300W-MCTP-SR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp	BUG Rating	LPW
UHXMAX-200-300W-MCTP-SR	200W 240W 300W	120-277V	28000LM 33600LM 42000LM	3000K 4000K 5000K	B4-U3-G1	140

Sample Ordering

Model	Wattage	Wattage	Color Temp.	Sensor
UHXMAX	200	300W	MCTPB	SR

Accessories:

Blank = No Accessory

UHXMAX-SMB-A = UHXMAX 70-150W & 300-500W Surface-Mounting Bracket Black

Factory-Installed Option:

Blank = No Accessory

OPT-EM-UHX = EXTERNAL EMERGENCY BACKUP BATTERY INSTALLED ON TOP OF THE FIXTURE

OPT-HBC=125TL-BK = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, 16/3TL, BLK

OPT-HBC=277TL-BK = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, 16/3TL, BLK

OPT-HBC=125SB-BK = STRAIGHT BLADE PLUG 10FT, 15A, 125V, 18/3TL, BLK

OPT-SEN-UHX = MICROWAVE BI-LEVEL SENSOR

ACCESSORIES:



WEC-3RC



WEC-3PR-78-AJ-WH
WEC-3PBT-78-AJ-WH



ACCESSORIES:



UHXMAX-SMB-A

UHXMAX 70-150W & 300-500W
Surface-Mounting Bracket Black

FACTORY-INSTALLED OPTION:



OPT-HBC-125SB-BK

STRAIGHT BLADE PLUG 10FT, 15A,
125V, 18/3TL, BLK



OPT-HBC-125TL-BK

NEMA TWIST-LOCK PLUG 8FT, 15A,
125V, 16/3TL, BLK



OPT-HBC-277TL-BK

NEMA TWIST-LOCK PLUG 8FT, 15A,
277V, 16/3TL, BLK



OPT-EM-UHX

EXTERNAL EMERGENCY
BACKUP BATTERY INSTALLED
ON TOP OF THE FIXTURE
(The bracket can be painted)

Dimensions:



UHXMAX-SMB-A

UHXMAX 70-150W & 300-500W
Surface-Mounting Bracket Black

