




DIMENSIONS:

4.72"(L) X 2"(W) X 1.34"(H)

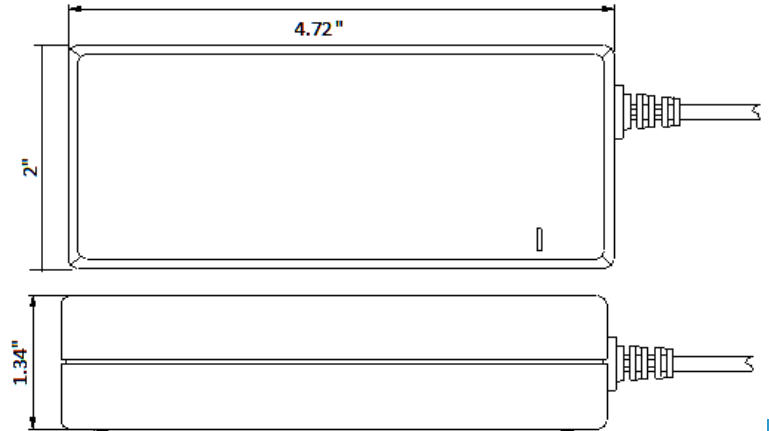

ULR-IN-PIDR-48W

LED INDOOR ELECTRONIC RIBBON LIGHT PLUG-IN DRIVER

MODEL	INPUT CURRENT	INPUT VOLTAGE	OUTPUT POWER	OUTPUT VOLTAGE
ULR-IN-PIDR-48W	Max 0.5A	100~240VAC	48W	24VDC

TECHNICAL SPECIFICATIONS:

- Input voltage: 100~240VAC, 50/60Hz
- AC Input Current: Max 0.5A
- Output power: 48W
- Output DC Voltage: 24VDC
- Min Load: 0.00A
- Rated Load: 2A
- Line Regulation: $\pm 1\%$
- Load Regulation: $\pm 5\%$
- Efficiency: 82% Min
- Turn on delay time: 3Sec Max. at 115VAC & Max Load
- Rise time: 40mS Min. at 115VAC & Max Load
- Hold up time: 5mS Min. at 115VAC & Max Load

FEATURES:

- Male 24V connector included
- Operating Temperature: 32°F to 104°F
- Protection Function: Short Circuit Test, Over current protection, Over Voltage Protection
- Relative Humidity: 5% to 90% RH, 72Hrs, Full Load , Normal operating.
- Ripple and Noise: 240mV p-p

SAFETY :

- EN55022
- AC power cord can be cut for hardwiring. Ensure proper installation according to local electrical codes and standards.
- DIELECTRIC STRENGTH Hi-Pot: Primary to second ary:3000Vac10mA/3S for type test.
- Insulation resistance: Primary to secondary:10MΩ min at 500V DC.

CERTIFICATIONS:

