

JOB NAME: _____

DATE: _____

TYPE: _____



ULR-IN-PIDR-72W

LED INDOOR ELECTRONIC RIBBON LIGHT
PLUG-IN DRIVER

TECHNICAL SPECIFICATIONS:


- Input voltage: 100~240VAC, 50/60Hz
- AC Input Current: Max 1A
- Output power: 72W
- Output DC Voltage: 24VDC
- Min Load: 3A
- Rated Load: 3A
- Line Regulation: $\pm 5\%$
- Load Regulation: $\pm 5\%$
- Efficiency: 83% Min
- Turn on delay time: 2Sec Max. at 115VAC & Max Load
- Rise time: 40mS Min. at 115VAC & Max Load
- Hold up time: 5mS Min. at 115VAC & Max Load

FEATURES:

- Male 24V connector included
- Operating Temperature: 32°F to 104°F
- Protection Function: Short Circuit Test, Over current protection, Over Voltage Protection
- Relative Humidity: 5% to 90% RH, 72Hrs, Full Load , Normal operating.
- Ripple and Noise: 150mV p-p

DIMENSIONS:

4.72"(L) X 2"(W) X 1.34"(H)

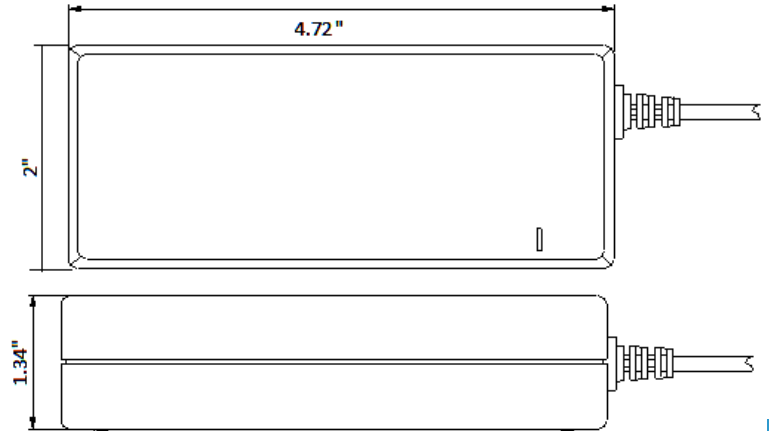

MODEL	INPUT CURRENT	INPUT VOLTAGE	OUTPUT POWER	OUTPUT VOLTAGE
ULR-IN-PIDR-72W	Max 1A	100~240VAC	72W	24VDC

SAFETY :

- Comply to SAA standard
- 3000V resistant

CERTIFICATIONS:

