VTA SERIES

OUTDOOR LIGHTS


VTA-12-20W-RGBWW-P

HIGH-OUTPUT DUAL-SELECTABLE VAPOR-TIGHT WITH ADJ. ANGLE



Customer Name:	
Project Name:	
Note:	Type:



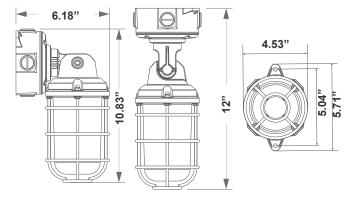

Illuminate your space with precision using our High-Output Dual-Selectable Vapor-Tight Fixture with Adjustable Angle. This versatile lighting solution offers exceptional brightness and flexibility, allowing you to tailor the illumination to your exact needs. With dual-selectable color temperature options and an adjustable angle feature, it's perfect for a wide range of industrial and commercial applications. Experience powerful lighting performance and durability with Westgate Mfg.

12"(H) x 6.18"(W) x 5.71"(D)

Features

- · Lens: PC Lens
- Aluminum Alloy Housing

- Aluminum Alloy Housing
- 7-year warranty

Technical Specifications

Electrical:

Voltage: 120-277V AC 60HzWattage: 12W/16W/20WPower Factor: >0.9

• THD: ≤20%

Efficacy: 110LM/W

 Bluetooth Connection Range: Approximately 30 feet(10 meters). Maximum Communication Range Will VaryDepending On Obstacles (Person, Metal, Wall, etc.) OrElectromagnetic Environment.

Mechanical:

- 180° Adjustable Arm
- Aluminum Alloy Housing
- Four 1/2" KO on the Junction Box
- Gray Finish
- Operating Temperature: -40°F to 113°F
- IP Rating: IP66, Suitable for Wet Locations
- 7-year Warranty

Lighting:

Lens: PC Lens

Total lumens: 2000LM Max.
 Color Temperatures: RGBWW
 Color Rendering Index: CRI >90
 Beam Angle: 90°-180° Adjustable

Rated Life: 70,000 Hrs

Applications:

 Industrial Facilities, Food Processing Plants, Outdoor Spaces, Commercial Kitchens, Car Wash Facilities, Cold Storage Facilities, Retail Spaces, Parking Garages.













Photometrics: VTA-12-20W-RGBWW-P



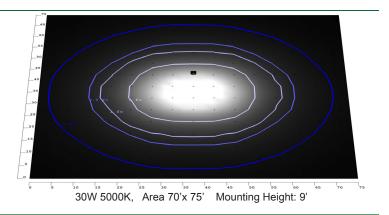

Other Views:







Side View Front View Back View

Performance Table: VTA-12-20W-RGBWW-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
VTA-12-20W-RGBWW-P	12W 16W 20W	120~277V	1200LM 1600LM 2000LM	RGBWW	B1-U3-G2	100

Sample Ordering

Model		Watt		Watt Color Temp.			Photocell		
VTA	_	12	_	20W	_	RGBWW	_	Р	1

Factory Installed Options:

Blank = No Option For Accessories

OPT-EM-VTU = INTERNAL EMERGENCY BACKUP BATTERY

OPT-PC-B = PHOTOCELL

OPT-CLR-85CBK/GR/SR/WHJ = COLOR PAINTS

OPT-SEN-3MRI V-5 = PROGRAMMARI F MICROWAVE BLJ EVEL

OPT-SEN-3MRLV-5 = PROGRAMMABLE MICROWAVE BI-LEVEL
WEC-8RC = OPTIONAL REMOTE CONTROL FOR MOTION SENSOR

FACTORY INSTALL OPTIONS:





