
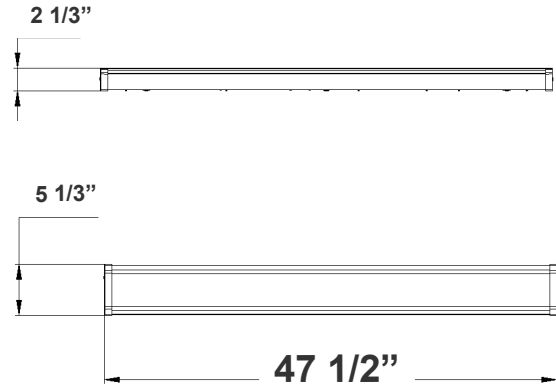


WAE-4FT-40W-MCT5-D  
CCT5 ADJUSTABLE LED ECONOMY WRAP-AROUND  
FIXTURES

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

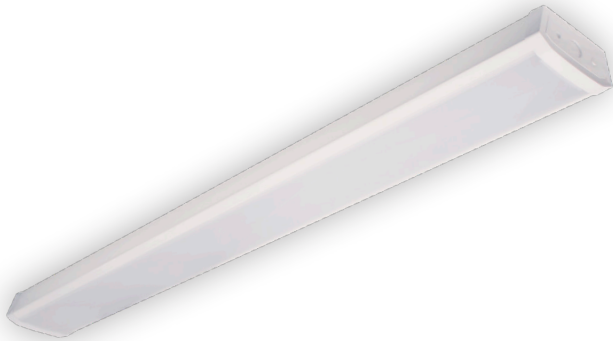

LED Economy Wrap-around fixtures are ideal for a variety of industrial, commercial and residential applications.

47 1/2"(L) x 5 1/3"(W) x 21/3"(H)

## Features

- Housing: Die-formed Cold Rolled Steel With Powder Coated White
- Installation: Ceiling-Mounted
- Lens: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 40W
- Power Factor: >0.99
- Efficacy: 80 LPW

### Mechanical:

- White Finish
- Housing: Die-formed Cold Rolled Steel With Powder Coated White
- Installation: Ceiling-Mounted
- Operating temperature: -22°F~104°F
- 5-Year Warranty

### Lighting:

- Dimming: (Dual Function) Triac Dimmable at 120V & 1-10V Dimming at 120-277V
- Lens: Polycarbonate Lens
- Total Lumens: 3200LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi-CCT (Selectable switch inside fixture)
- Color Rendering Index: CRI ≥ 82
- Life Span: 50,000 Hrs.

### Applications:



- Ideal for a Variety of Industrial, Commercial and Residential Applications.

## Other Models:


- 20W | 1600LM | WAE-2FT-MCT-DT



**Photometrics:** WAE-4FT-MCT5-DD



BUD Rating: B1-U2-G1

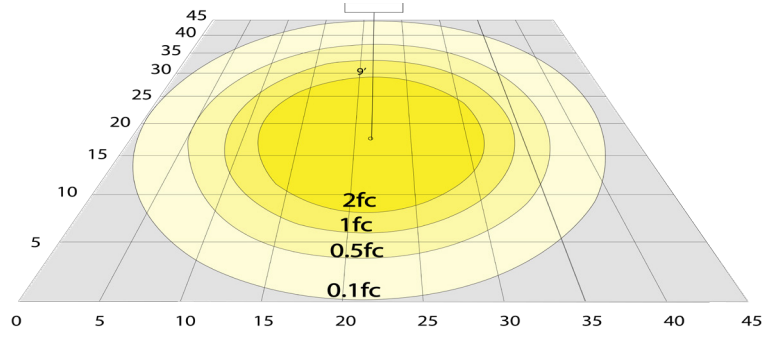

40W 5000K, Area 45'x 45' Mounting Height: 9'


**Other Views:**



Side View



Front View



Back View

**Performance Table:** WAE-4FT-MCT5-DD

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WAE-4FT-MCT5-DD	40W	120~277V	3200LM	2700K 3000K 3500K 4000K 5000K	B1-U2-G1	80

**Sample Ordering**

**Model Size Color Temp. Dimming**

WAE - 4FT - MCT5 - DD

**Accessories:**

Blank = No Option For Accessories

SCL-CSY1-6FT= ADJ. 6FT 1/16in SINGLE SUSPENSION 5in CANOPY SET WITH Y DOUBLE KEYHOLE END CONNECTORS, NONPOWER SIDE

SCL-CSY1P-6FT = ADJ. 6FT 1/16in SINGLE SUSPENSION 5in CANOPY SET WITH Y DOUBLE KEYHOLE END CONNECTORS, POWER SIDE WITH SJTW18/5 WHITE CORD

WEC-3RC = OPTIONAL REMOTE CONTROL

**Factory-Installed Options:**

Blank = No Option For Accessories

OPT-EM-FM1INT= INTERNAL EMERGENCY BACKUP BATTERY

OPT-2P-58= PIR SENSOR (Not remote capable)

OPT-SEN-2MDR-36 = INTERNAL PROGRAMMABLE MICROWAVE BI-LEVEL

WEC-3RC = OPTIONAL REMOTE CONTROL

**ACCESSORIES:**



SCL-CSY1-6FT



SCL-CSY1P-6FT



WEC-3RC

**FACTORY-INSTALLED OPTIONS:**



OPT-EM-FM1INT



OPT-SEN-2MDR-36

