

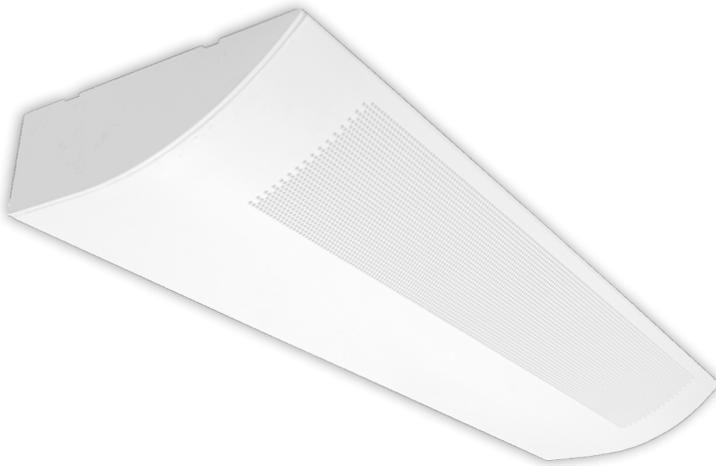


WCPL-UD-2FT-25W-MCT-D

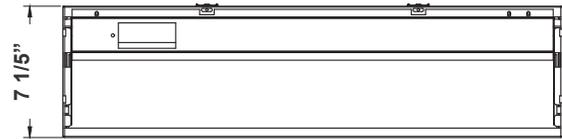

Customer Name: _____
Project Name: _____
Note: _____ | Type: _____



7 1/5" H x 2 2/5" D x 27 2/5" W

This is Wall Commercial Perforated Light is Ideal for Storage rooms, Offices Conference rooms, Retail Reception areas, Hallways Education facilities

Features

- Lens: Perforated Lens
- Housing: Anodized Aluminum
- 5-Year Warranty
- MCT: Multi Color Temperature (Selectable Switch Located inside the Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 25W
- Power Factor: >0.95
- Efficacy: 110 LPW
- THD: <20%

Mechanical:

- Housing: Anodized Aluminum
- Polycarbonate End Caps
- Finish: Powder Coated White
- Ambient Temperature: -22°F to +104°F
- 5-year Warranty

Lighting:

- Lens: Perforated Lens
- High Quality LED Chips provide High Efficiency, Heat Dissipation, Stability, and Lumen Maintenance
- Dimmable: 0~10V Dimmable
- MCT: Multi Color Temperature (Selectable Switch Located inside the Fixture)
- Lumens Range: 2750LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Rated Life: 50,000 Hrs



Applications:

- Storage rooms
- Offices
- Conference rooms
- Retail
- Reception Areas
- Hallways
- Education Facilities


• 50W | 5500LM | WCPL-UP-4FT-50W-MCT-D



Photometrics: WCPL-UD-2FT-25W-MCT-D



BUG Rating: B0-U5-G1

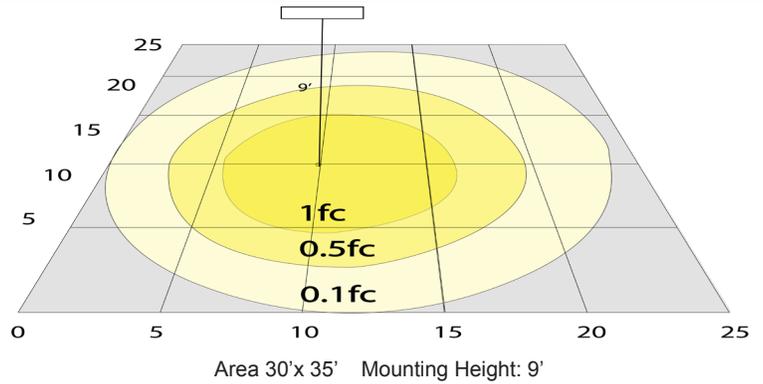


Other Views:



Lens View



Side View



Front View



Back View

Performance Table: WCPL-UD-2FT-25W-MCT-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WCPL-UD-2FT-25W-MCT-D	25W	120~277V	2750LM	3000K 4000K 5000K	B0-U5-G1	110

Sample Ordering

Model Light Direction Size Watt Color Temp. Dimming

WCPL - UD - 2FT - 25W - MCT - D

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-SL1INT= EMERGENCY BACKUP INTERNAL BATTERY
 OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING SENSOR
 WEC-3RC = REMOTE CONTROL

FACTORY-INSTALLED OPTIONS:



OPT-EM-SL1INT



OPT-SEN-2US



WEC-3RC

Example:

1. WCPL-UD-2FT-25W-MCT-D
2. WCPL-UD-2FT-25W-MCT-D
OPT-EM-SL1INT

(FOR WCPL 25W MCT FIXTURE 120-277V)

(FOR WCPL 25W MCT FIXTURE 120-277V)
(EMERGENCY BACKUP INTERNAL BATTERY)

