

WLF SERIES

Outdoor Lighting

WLF-24-40W-MCTP-BK-BA

WLF-24-40W-MCTP-BR-BA

12" DOME LIGHT WITH FLAT LENS

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)



Avail Finishes:



A sleek, low-profile ceiling light featuring a flat lens design for even, glare-free illumination. Ideal for both residential and commercial settings.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

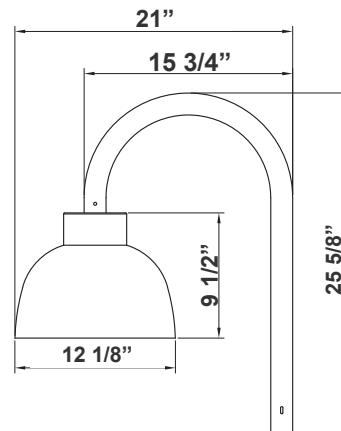

21"(W) x 25 5/8"(H) x 12 1/8"(D)

Features

- Aluminum Housing and Steel Back Plate
- White Glass Lens
- Top-Of-Pole Mount Bell Arm
- 7-Year Warranty
- Multi CCT Power Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 24W/32W/40W
- Power Factor: >0.90
- Efficacy: 100 LPW

Lighting:

- Total Lumens: 4000LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Mechanical:

- Aluminum Housing and Steel Back Plate
- White Glass Lens
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP42, Suitable for outdoor use

Applications:

- LED Seaside Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.






Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

WG-07212022



Photometrics: WLF-24-40W-MCTP-WB

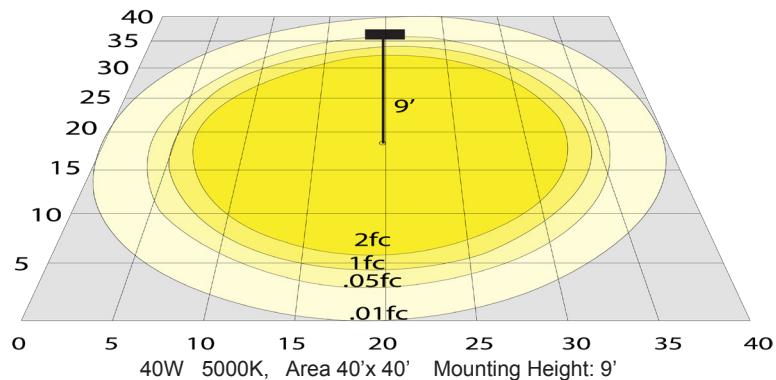

BUD Rating: B2-U1-G1

Performance Table: WLF-24-40W-MCTP-WB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WLF-24-40W-MCTP-BK-BA	24W		2400LM	3000K		
WLF-24-40W-MCTP-BR-BA	32W	120V	3200LM	4000K	B2-U1-G1	
	40W		4000LM	5000K		100

Sample Ordering

Model Min. Watt Max. Watt Color Temp. Finishes Housing

WLF - 24 - 40W - MCTP - [] - BA

BK = Black
BR = Bronze

Accessories:



Blank = No Option

DAB-PA2-1 = DAB 2in POLE ADAPTER FOR 1 BELL ARM, BLACK
DAB-PA2-2 = DAB 2in POLE ADAPTER FOR 2 BELL ARM, BLACK
DAB-PA3-1 = DAB 3in POLE ADAPTER FOR 1 BELL ARM, BLACK
DAB-PA3-2 = DAB 3in POLE ADAPTER FOR 2 BELL ARM, BLACK
DAB-PA4-1 = DAB 4in POLE ADAPTER FOR 1 BELL ARM, BLACK

ACCESSORIES:



DAB-PA2-1



DAB-PA3-1



DAB-PA4-1



DAB-PA2-2



DAB-PA3-2



DAB-PA4-2

ACCESSORIES:




WLF-24-40W-MCTP-BK-BA
DAB-PA2-2
2in POLE + 16in fixture (double)
(Pole separate per job spec*)




WLF-24-40W-MCTP-BK-BA
DAB-PA3-2
3in POLE + 16in fixture (double)
(Pole separate per job spec*)





WLF-24-40W-MCTP-BK-BA
DAB-PA4-2
4in POLE + 16in fixture (double)
(Pole separate per job spec*)



DAB-PA2-2
2 1/4"(W) x 6 1/8"(H)
3 1/2"(W) x 6 1/8"(H)



DAB-PA3-2
3 1/2"(W) x 6"(H)
4 3/4"(W) x 5 3/4"(H)



DAB-PA4-2
4 3/4"(W) x 7"(H)




WLF-24-40W-MCTP-BK-BA
DAB-PA2-1
2in POLE + 16in fixture
(Pole separate per job spec*)




WLF-24-40W-MCTP-BK-BA
DAB-PA3-1
3in POLE + 16in fixture
(Pole separate per job spec*)




WLF-24-40W-MCTP-BK-BA
DAB-PA4-1
4in POLE + 16in fixture
(Pole separate per job spec*)



DAB-PA2-1
2 1/4"(W) x 5 3/4"(H)



DAB-PA3-1
3 1/2"(W) x 6"(H)



DAB-PA4-1
4 3/4"(W) x 7"(H)

