

WLF SERIES Outdoor Lighting

WLF-24-40W-MCTP-WH-SRK-218

WLF-24-40W-MCTP-BK-SRK-218

WLF-24-40W-MCTP-BR-SRK-218

12" DOME LIGHT WITH FLAT LENS

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____


Type: _____



Avail Finishes:



A sleek, low-profile ceiling light featuring a flat lens design for even, glare-free illumination. Ideal for both residential and commercial settings.

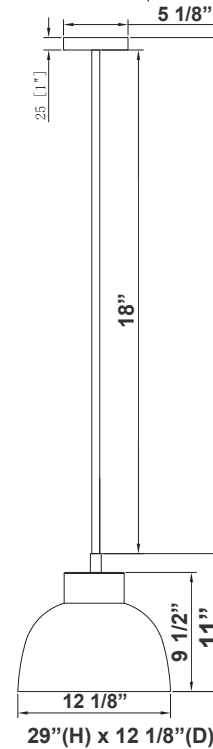

Features

- Aluminum Housing and Steel Back Plate
- White Glass Lens
- 18" or 36" Swivel Rod Kit
- 7-Year Warranty
- Multi CCT Power Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 24W/32W/40W
- Power Factor: >0.90
- Efficacy: 100 LPW

Mechanical:

- Aluminum Housing and Steel Back Plate
- White Glass Lens
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP42, Suitable for outdoor use

Lighting:

- Total Lumens: 4000LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Applications:

- LED Seaside Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-07212022

Photometrics: WLF-24-40W-MCTP-SRK-218

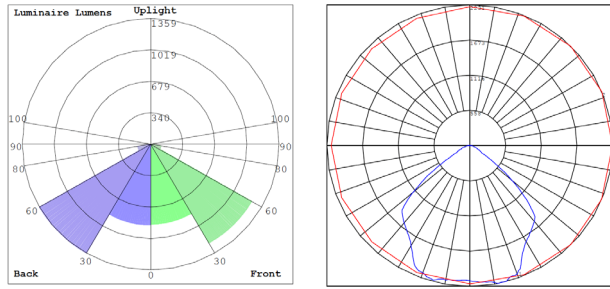

BUD Rating: B2-U1-G1

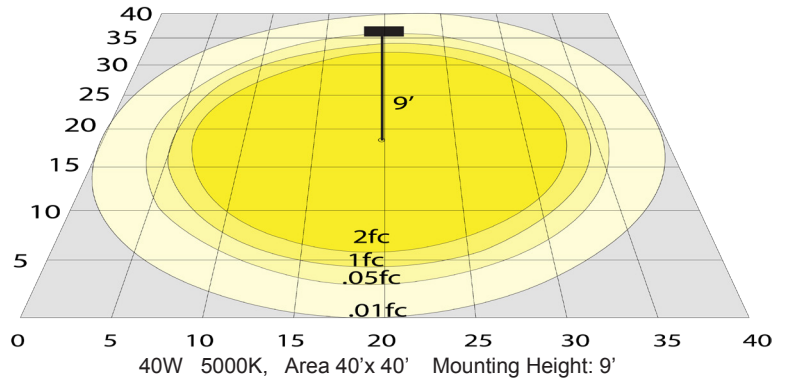

Performance Table: WLF-24-40W-MCTP-SRK-218

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WLF-24-40W-MCTP-WH-SRK-218	24W	120V	2400LM	3000K	B2-U1-G1	100
WLF-24-40W-MCTP-BK-SRK-218	32W		3200LM	4000K		
WLF-24-40W-MCTP-BR-SRK-218	40W		4000LM	5000K		

Sample Ordering

Model Min. Watt Max. Watt Color Temp. Finishes Housing Length

WLF - 24 - 40W - MCTP - [] - SRK - 218

WH = White
BK = Black
BR = Bronze

