

# WMA SERIES OUTDOOR LIGHTING

WMA-UDL-MCTP-BK-D  
WMA-UDL-MCTP-BR-D  
WMA-UDL-MCTP-WH-D  
WMA-UDL-MCTP-SIL-D

7" ARCHITECTURAL COMMERCIAL DESIGNER OUTDOOR  
CYLINDER, UP/DOWN CONTROLS & PHOTOCELL


**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)



Avail Finishes:



The 7" Architectural Commercial Designer Outdoor Cylinder features both up and down lighting, ideal for enhancing exterior spaces with stylish, high-output illumination. Equipped with advanced photocell technology for automatic dusk-to-dawn operation, it maximizes energy efficiency. Its sleek, modern design complements architectural settings, while offering reliable performance in commercial applications. Perfect for building façades, entryways, and walkways, this fixture delivers both aesthetic appeal and practical functionality.

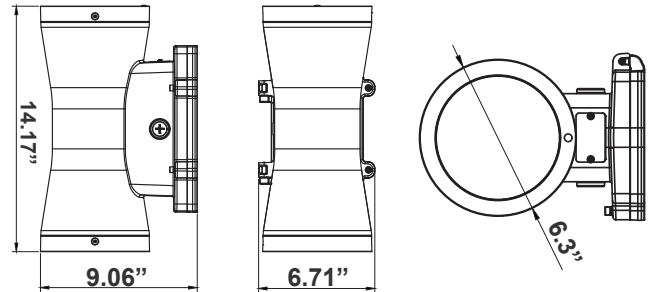

14.17"(J) x 9.06"(W) x 6.3"(D)

## Features

- Finish: Black, Bronze, White & Silver
- MCTP: Multi Color Temperature & Multi Power/Wattage (Selectable)
- 7-Year Warranty
- Rated life: 70,000 hrs

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC
- Power Factor: >0.90
- Wattage: 18W/30W/45W/60W
- Efficacy: 110 LPW
- THD: <20%

### Mechanical:

- Housing: Die-cast Aluminum & Glass
- Finish: Black, Bronze, White & Silver
- DC Button Photocell with ON/OFF switch Included
- Maximum Ambient Temperature: -68°F to 104°F
- Suitable for Wet Location
- 7-Year Warranty

### Lighting:

- MCTP: Multi Color Temperature & Multi Power/Wattage (Selectable)
- Dimming: 1-10V Dimming
- Total Lumens: 6600LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 hrs
- Beam angle: 45° for each side

### Applications:

- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas



## Other Views:

Black Finish:



Side View



Front View



Lens View

Bronze Finish:



Side View



Front View



Lens View

White Finish:



Side View



Front View



Lens View

Silver Finish:



Side View



Front View



Lens View

## Performance Table: WMA-UDL-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMA-UDL-MCTP-BK-D	18W	120V	1980LM	3000K/ 4000K/ 5000K	B1-U5-G0	110
WMA-UDL-MCTP-BR-D	30W		3300LM			
WMA-UDL-MCTP-WH-D	45W		4950LM			
WMA-UDL-MCTP-SIL-D	60W		6600LM			

## Sample Ordering

**Model**   **Light Direction**   **Color Temp.**   **Finish**   **Dimming**

WMA - UDL - MCTP - [ ] - D

BK = Black  
BR = Bronze  
WH = White  
SIL = Silver

