


WMC SERIES OUTDOOR LIGHTING

WMC-UDL-MCT-BK-DT
WMC-UDL-MCT-BR-DT
WMC-UDL-MCT-BN-DT
WMC-UDL-MCT-WH-DT

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

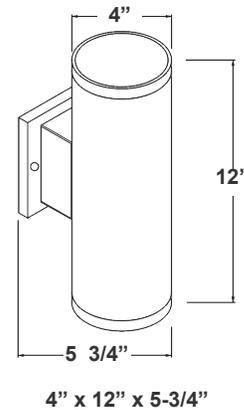

Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

Features

- Finish: Black, Bronze, Brushed Nickel & White
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- 7-Year Warranty
- Outdoor UP/Down Light

Technical Specification

Electrical:

- Voltage: 120V AC
- Power Factor: >0.95
- Wattage: 15W (Down light); 30W (Up/Down light, 15W per end)
- Efficacy: 80 LPW
- THD: <20%

Mechanical:

- Housing: Die-cast Aluminum & Glass
- Finish: Black, Bronze, Brushed Nickel & White
- Maximum Ambient Temperature: -68°F to 104°F
- Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 2400LM
- Color Temperatures: 3000K/4000K/5000K
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 hrs
- Beam angle: 45° for each side

Applications:



- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

Other Models:


- 15W | 1200LM | WMC-DL-MCT-BK-DT
- 15W | 1200LM | WMC-DL-MCT-BR-DT
- 15W | 1200LM | WMC-DL-MCT-BN-DT
- 15W | 1200LM | WMC-DL-MCT-WH-DT



Photometrics: WMC-UDL-MCT



BUG Rating: B1-U5-G0

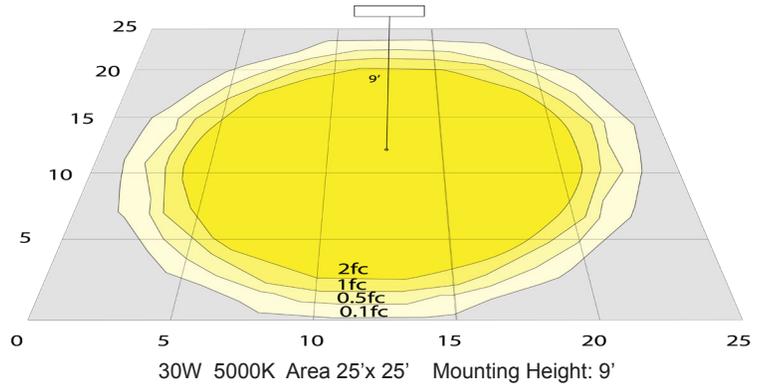

Other Views:

Black Finish:



Side View



Front View



Back View



Lens View

Bronze Finish:



Side View



Front View



Back View



Lens View

Brushed Nickel Finish:



Side View



Front View



Back View



Lens View

White Finish:



Side View



Front View



Back View



Lens View



Performance Table: WMC-UDL-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMC-UDL-MCT-BK-DT	30W	120V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	80
WMC-UDL-MCT-BR-DT	30W	120V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	80
WMC-UDL-MCT-BN-DT	30W	120V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	80
WMC-UDL-MCT-WH-DT	30W	120V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	80

Sample Ordering

Model Light Direction Color Temp. Finish Dimming

WMC - UDL - MCT - - DT

BK = Black
BR = Bronze
BN = Brushed Nickel
WH = White

Factory-Installed Option:

Blank = No Option For Accessories
OPT-PC-B = FOR 120V-277V PHOTOCELL
OPT-EM-FM2INT = INTERNAL EMERGENCY BACK UP BATTERY

Example:

1. WMC-UDL-MCT-BR-DT (FOR WMC 30W UP/DOWN LIGHT MCT BRONZE FIXTURE 120V)
2. WMC-UDL-MCT-BR-DT (FOR WMC 30W UP/DOWN LIGHT MCT BRONZE FIXTURE 120V)
OPT-PC-B (FOR 120V-277V PHOTOCELL)

FACTORY-INSTALLED OPTION:



OPT-PC-B
FOR 120V-277V PHOTOCELL



OPT-EM-FM2INT
INTERNAL EMERGENCY
BACK UP BATTERY

